

Photometric test report

Family
Streetlight 21 midi easy LED

Order number: 5XE7E47N08MB
EAN: 4058352898147

LP number
59077_1163



Version post-top or side-entry mounting, NEMA 7 pin (DALI)
Optic direct, asymmetric wide distribution S100006
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG-DALI Plus
Rated values Net luminous flux = 20180 lm
 Power consumption = 147.0 W
 Luminous efficacy = 137.3 lm/W

serial
documentation
16.06.2023

siteco

Luminous intensity in cd/klm


C180-0

C210-30

C215-35

C270-90

Imax: 809 cd/klm

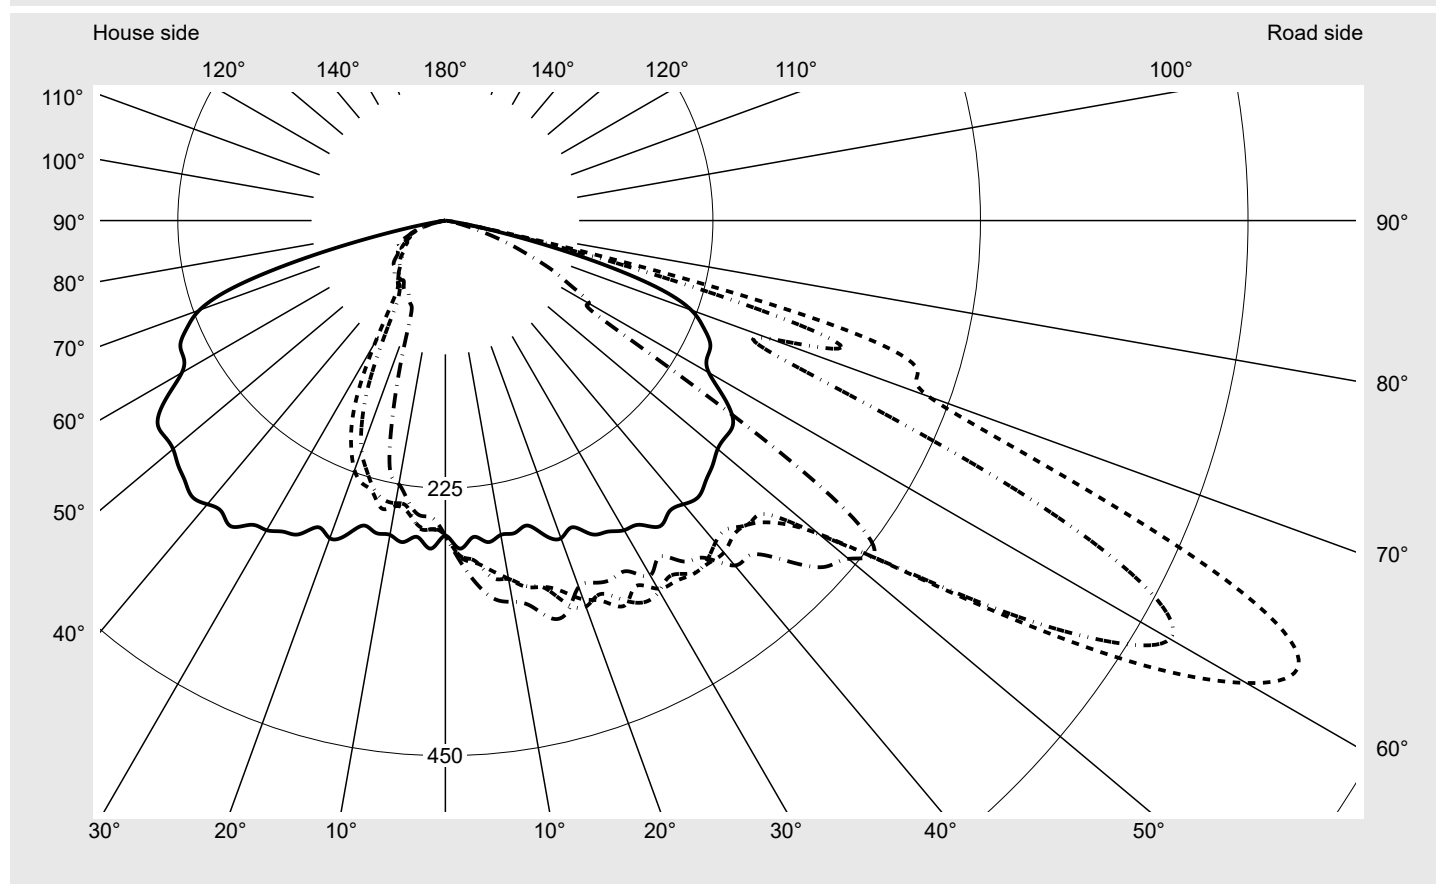

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	498.7
Imax 80°	32.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 midi easy LED

Order number: **5XE7E47N08MB**
EAN: **4058352898147**

LP number
59077_1163

Envelope curve in cd/klm


KMK 62.5°

KMK 60°

KMK 57.5°

KMK 55°

siteco

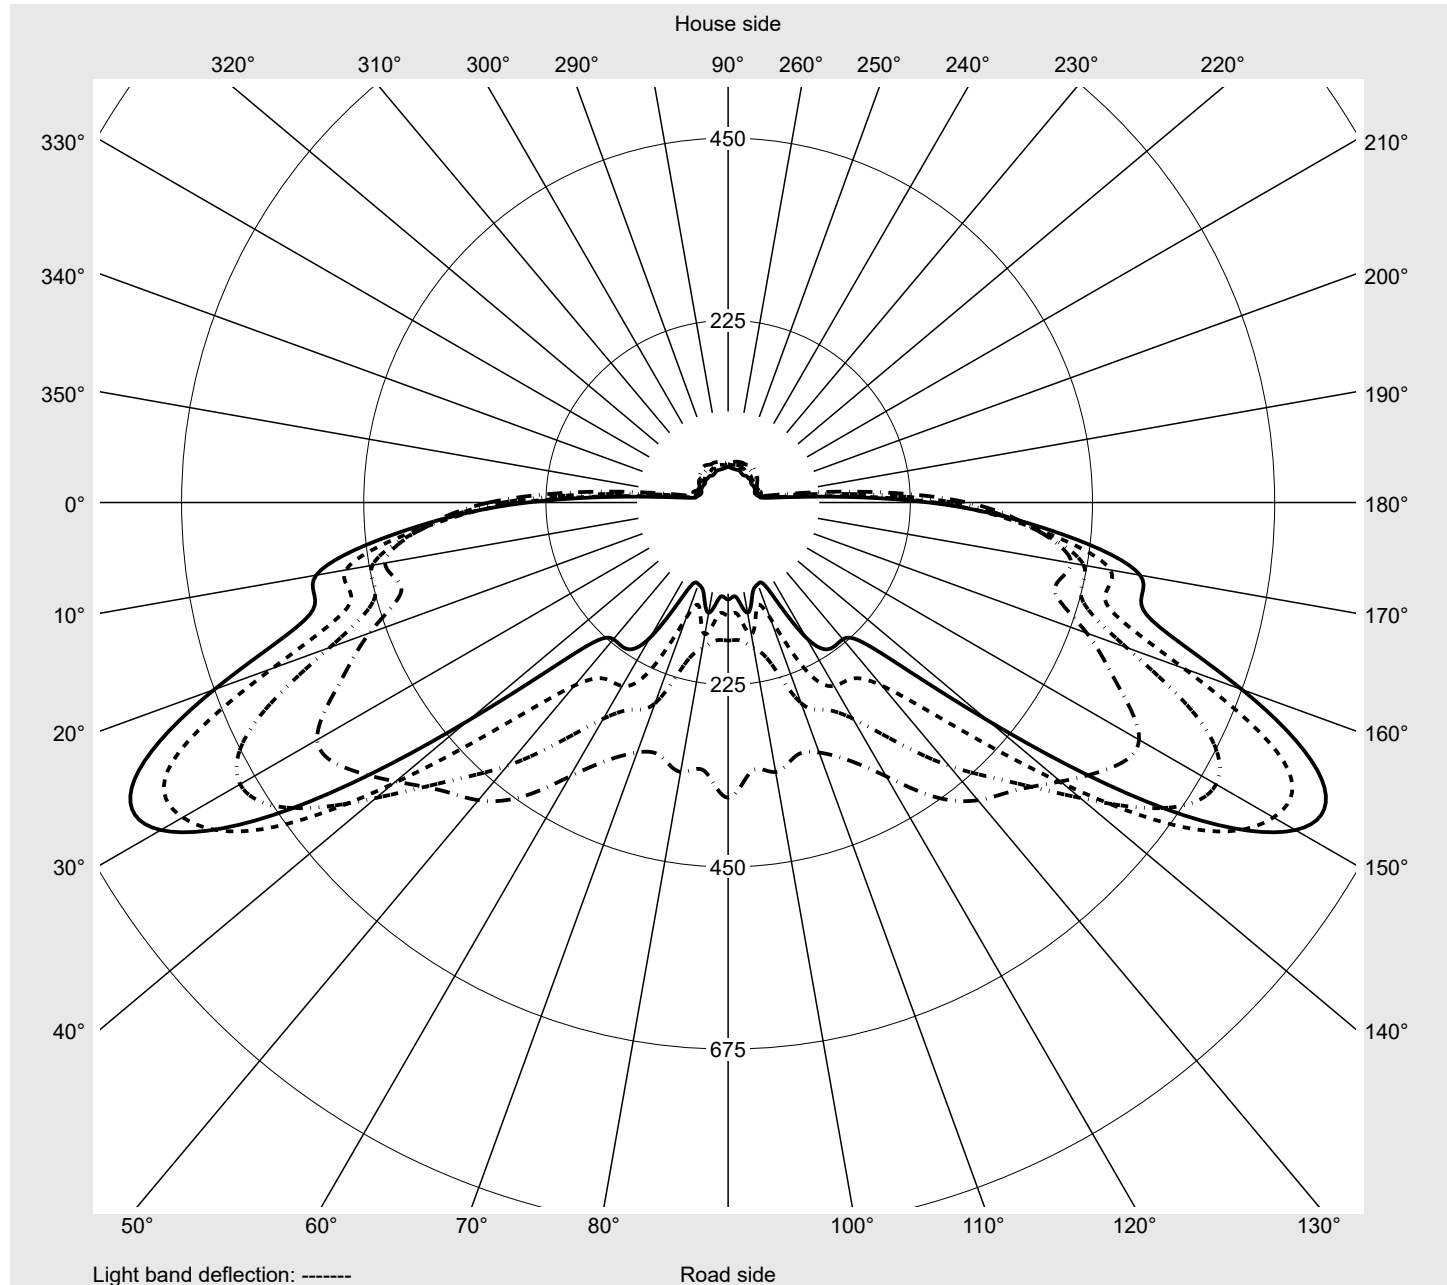

Photometric test report

Family				Order number: 5XE7E47N08MB								LP number			
Streetlight 21 midi easy LED				EAN: 4058352898147								59077_1163			
Table of values for luminous intensities										Maximum luminous intensity				siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°		
γ	Luminous intensity in cd/klm														
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0		
2,5°	276.1	278.2	279.9	280.7	282.6	280.9	282.9	282.1	283.9	285.0	286.7	288.0	286.1		
5,0°	267.2	269.0	274.7	278.5	279.8	286.4	288.9	287.4	290.8	292.6	294.2	300.0	298.6		
7,5°	272.7	275.9	280.1	284.4	288.5	292.4	296.9	303.0	303.7	307.0	310.0	310.1	313.3		
10,0°	268.4	272.2	277.4	291.4	300.9	306.8	305.9	306.1	302.0	308.4	313.7	316.2	320.5		
12,5°	269.1	273.9	287.4	294.7	304.6	314.3	315.6	314.8	322.9	327.5	331.4	330.3	330.5		
15,0°	265.5	276.8	296.7	300.8	305.0	315.9	318.9	319.5	329.6	338.0	337.2	339.7	342.1		
17,5°	277.4	287.6	299.4	305.4	315.7	326.6	326.9	337.2	336.9	335.5	339.7	341.4	338.5		
20,0°	284.3	295.0	304.2	313.5	321.0	328.4	338.9	345.5	343.3	344.8	347.8	341.7	334.4		
22,5°	279.1	294.0	312.1	323.0	327.7	341.0	346.5	340.0	341.6	352.4	351.9	343.1	331.1		
25,0°	291.0	303.1	317.1	327.0	339.5	348.9	357.1	351.7	350.1	347.4	339.5	333.6	333.4		
27,5°	295.0	309.9	321.7	338.0	351.4	356.8	346.6	361.8	356.7	344.1	331.2	337.6	339.9		
30,0°	300.7	317.1	328.5	349.8	355.9	355.9	357.4	359.7	352.9	344.8	333.1	337.4	338.9		
32,5°	303.3	318.9	336.3	353.9	359.5	349.5	359.8	353.7	348.0	346.4	340.3	346.7	346.0		
35,0°	314.0	326.8	340.1	355.5	360.5	357.7	363.1	362.1	346.9	343.3	345.1	341.2	346.2		
37,5°	308.9	327.9	347.5	353.8	357.0	355.0	363.3	360.9	349.1	347.9	346.4	345.8	346.0		
40,0°	311.4	332.1	344.0	358.4	357.1	363.3	364.4	353.3	357.7	355.2	353.1	353.4	356.3		
42,5°	315.1	342.3	354.5	357.4	364.8	358.6	358.8	351.6	354.4	362.5	363.5	361.8	376.7		
45,0°	309.7	352.0	364.3	364.3	367.8	375.0	361.3	360.8	367.0	373.0	384.1	397.1	402.7		
47,5°	304.8	361.9	365.7	366.2	379.0	381.6	376.2	365.3	379.3	404.4	419.2	437.2	429.1		
50,0°	298.9	376.3	386.3	389.3	397.8	415.1	409.9	410.7	417.6	449.6	467.2	465.5	448.8		
52,5°	297.8	384.5	408.5	405.9	426.8	460.3	481.7	479.2	484.8	487.2	491.5	476.7	441.4		
55,0°	295.5	381.4	430.2	417.6	471.4	530.1	586.0	573.2	535.9	502.5	479.9	443.5	390.5		
57,5°	278.4	380.3	445.9	451.7	523.6	645.7	695.9	657.7	567.6	486.1	424.4	359.9	308.3		
60,0°	255.9	384.0	479.3	483.8	599.0	757.2	777.7	703.6	540.3	384.0	295.1	265.7	261.6		
62,5°	248.4	402.0	516.6	535.0	675.3	808.8	809.0	659.9	419.1	256.1	220.5	220.2	192.6		
65,0°	245.9	422.0	553.6	573.4	711.3	776.7	738.3	510.2	243.5	208.7	192.4	191.3	104.6		
67,5°	235.0	425.3	575.2	564.4	621.8	656.3	565.5	314.5	192.3	176.6	153.1	147.2	65.3		
70,0°	220.0	417.0	498.7	490.7	467.4	475.7	432.4	290.7	186.4	147.5	119.0	82.6	48.3		
72,5°	186.1	339.1	400.0	304.5	275.2	335.3	416.1	348.4	176.7	109.9	75.5	56.3	39.4		
75,0°	123.0	169.2	172.4	105.2	89.8	211.1	330.5	216.4	77.4	39.2	49.9	41.1	30.5		
77,5°	56.5	71.0	62.1	33.2	30.7	82.6	105.1	73.0	43.5	25.3	37.7	26.1	20.2		
80,0°	17.1	18.7	17.1	12.0	10.0	32.8	16.7	12.3	11.9	13.6	24.3	14.2	12.9		
82,5°	2.8	2.6	2.8	2.7	4.2	12.7	4.3	4.9	3.6	2.7	7.1	7.5	9.0		
85,0°	0.6	1.0	0.8	0.7	0.9	0.6	1.1	1.6	1.2	1.0	1.0	1.0	0.9		
87,5°	0.2	0.1	0.2	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7E47N08MB EAN: 4058352898147	LP number 59077_1163
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0
2,5°	287.5	287.6	287.1	287.4	287.0	287.0	273.3	268.1	264.9	264.2	262.9	260.1	259.7
5,0°	298.8	299.6	303.6	304.8	306.2	307.1	263.9	264.0	263.7	260.2	262.6	257.7	259.0
7,5°	311.1	312.7	314.2	315.4	319.9	321.2	264.6	260.9	257.4	253.9	248.6	246.6	243.3
10,0°	322.2	321.1	324.7	324.1	330.8	325.5	261.4	256.1	251.1	248.3	244.7	244.0	241.3
12,5°	332.1	335.3	335.1	332.5	329.2	332.0	262.3	260.1	252.5	246.3	242.6	247.9	240.3
15,0°	337.6	337.3	338.6	345.5	346.4	346.4	261.0	256.5	253.2	248.3	245.2	236.4	233.1
17,5°	341.6	341.9	341.5	339.9	341.6	343.8	270.2	262.3	253.8	247.9	241.6	232.0	220.2
20,0°	335.0	333.0	331.7	327.6	328.6	327.9	267.8	260.8	255.7	239.3	232.0	223.3	206.1
22,5°	329.0	328.2	327.2	332.2	325.7	329.6	271.4	267.7	246.7	240.9	224.1	206.9	183.3
25,0°	334.2	338.9	333.4	328.8	331.6	332.3	273.9	267.1	247.9	230.6	210.1	185.4	153.1
27,5°	345.0	340.9	338.0	336.9	330.6	332.5	281.1	265.5	244.5	212.3	189.3	154.5	114.5
30,0°	347.4	348.6	347.5	338.6	338.7	344.5	287.4	263.9	231.2	198.3	160.4	116.8	84.4
32,5°	348.4	347.2	343.8	343.5	341.8	335.2	290.9	256.1	220.6	179.3	126.7	86.3	72.1
35,0°	347.0	345.2	346.6	347.5	342.5	350.1	287.0	243.6	204.1	146.9	96.2	70.3	66.8
37,5°	350.1	351.8	356.0	359.3	353.9	357.4	278.7	226.5	179.7	108.7	69.8	65.7	65.1
40,0°	361.0	366.3	369.3	373.6	367.6	378.6	271.5	211.0	146.0	80.9	62.4	61.5	61.5
42,5°	385.5	380.9	382.4	379.9	385.9	381.1	253.2	192.1	110.3	60.5	58.0	57.7	57.7
45,0°	410.8	397.6	391.9	399.7	411.0	404.2	243.1	159.0	76.9	55.3	55.2	53.6	54.0
47,5°	433.6	414.0	411.4	415.7	420.3	431.3	227.6	126.7	55.1	50.4	51.7	51.7	52.1
50,0°	445.6	425.7	419.8	449.5	443.7	442.5	210.7	88.3	49.0	47.6	47.1	49.3	47.6
52,5°	416.0	395.0	398.9	443.8	448.1	454.9	180.9	59.1	45.7	45.0	43.8	45.3	45.8
55,0°	351.0	328.5	323.8	337.9	333.0	364.6	154.6	48.8	43.8	42.1	39.9	41.0	43.9
57,5°	282.3	263.7	206.2	182.5	171.1	170.4	121.8	44.9	41.6	41.3	39.9	40.0	43.9
60,0°	229.7	151.7	135.7	165.2	139.3	139.5	86.6	41.6	37.8	38.2	38.7	36.9	40.7
62,5°	120.0	107.2	116.5	138.1	117.6	119.8	77.0	39.6	36.3	35.0	36.5	37.2	37.1
65,0°	83.4	91.6	95.7	104.6	97.6	100.3	69.3	36.7	32.8	31.9	34.4	37.0	32.8
67,5°	67.6	73.1	74.5	77.1	78.6	76.2	54.0	28.7	29.8	27.7	32.7	34.8	32.1
70,0°	52.0	55.8	56.0	55.7	56.2	56.3	41.4	23.6	24.9	23.4	27.3	28.8	27.1
72,5°	39.0	39.0	37.7	39.2	37.6	36.6	39.4	19.2	19.3	19.8	21.9	22.2	21.5
75,0°	24.8	24.3	23.5	23.2	21.8	20.8	33.9	14.3	14.8	15.1	17.1	14.6	15.3
77,5°	14.2	13.2	12.7	11.4	11.4	9.5	22.2	10.4	8.7	9.2	11.9	11.0	10.9
80,0°	7.8	5.8	5.4	4.1	4.0	2.8	9.0	5.5	5.3	4.7	5.5	5.6	6.8
82,5°	3.8	1.6	1.4	1.0	1.4	0.9	2.5	2.3	2.2	2.3	2.5	2.8	3.4
85,0°	0.6	0.4	0.3	0.3	0.3	0.4	0.8	0.7	0.8	0.8	0.7	0.9	1.0
87,5°	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED		Order number: 5XE7E47N08MB EAN: 4058352898147										LP number 59077_1163	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	0.4	0.4
2,5°	256.9	256.0	255.6	256.1	254.6	252.5	250.9	249.4	248.9	249.4	250.4	3.2	3.6
5,0°	255.7	253.9	254.1	252.3	249.0	249.7	248.6	248.0	246.8	248.4	248.8	6.5	10.2
7,5°	240.3	241.6	243.4	240.7	241.4	239.6	241.1	240.8	239.1	237.5	238.3	9.8	20.0
10,0°	240.0	236.3	237.0	232.8	230.3	226.3	227.2	227.7	229.3	228.1	225.1	13.0	33.0
12,5°	232.1	228.4	226.2	223.2	220.3	215.5	208.4	206.4	206.3	212.3	215.0	16.3	49.3
15,0°	228.7	218.0	206.6	202.2	200.2	193.2	184.1	176.9	174.8	172.2	172.4	19.2	68.5
17,5°	209.4	198.3	189.0	174.2	161.0	148.0	139.2	129.3	122.8	121.0	123.7	21.6	90.1
20,0°	192.2	169.1	150.1	131.9	115.1	104.2	97.2	89.9	88.2	86.4	85.0	23.5	113.6
22,5°	156.5	129.9	107.3	94.2	82.7	77.8	78.4	76.9	75.2	76.8	76.1	25.4	139.0
25,0°	117.5	93.4	80.0	74.6	74.6	73.9	73.1	74.0	72.0	74.0	72.3	27.6	166.6
27,5°	87.2	75.8	71.2	72.6	73.4	71.9	71.0	71.6	70.4	71.1	67.8	29.8	196.4
30,0°	73.6	70.2	72.9	71.5	70.4	71.0	69.8	70.1	68.1	67.3	68.0	32.0	228.4
32,5°	67.8	68.1	67.7	70.5	70.7	68.2	67.0	65.7	64.1	63.6	65.2	33.9	262.4
35,0°	66.4	67.3	66.7	66.1	65.8	64.8	64.9	64.1	64.6	62.1	61.4	35.8	298.2
37,5°	67.0	67.1	66.4	64.8	64.1	62.0	62.1	63.5	62.3	64.1	62.6	37.7	335.9
40,0°	65.2	69.2	62.8	60.8	59.4	59.4	62.3	62.4	60.3	60.0	60.4	39.8	375.7
42,5°	64.4	66.3	68.6	56.9	57.5	58.5	59.4	60.7	57.9	58.0	62.3	42.0	417.7
45,0°	61.0	62.0	77.2	58.2	58.6	59.2	60.0	59.8	60.6	60.1	60.3	44.9	462.5
47,5°	53.1	53.8	65.9	58.5	59.2	58.8	59.9	60.0	59.8	59.0	57.8	47.8	510.3
50,0°	49.0	52.4	58.1	59.5	60.2	57.5	58.4	56.2	56.5	55.8	56.8	51.7	562.1
52,5°	47.6	51.8	55.7	54.3	55.8	54.5	53.9	54.8	53.8	53.5	53.4	54.9	616.9
55,0°	47.0	49.2	51.3	53.6	53.4	51.8	52.2	51.8	51.3	49.3	48.8	55.2	672.1
57,5°	45.4	44.7	46.5	47.9	48.4	48.5	47.8	47.7	47.4	46.4	47.2	53.2	725.3
60,0°	41.2	41.2	43.3	43.3	43.7	45.9	44.1	44.4	44.6	44.1	43.7	51.8	777.1
62,5°	37.1	39.0	39.1	39.8	38.6	39.5	41.5	41.8	42.1	42.8	44.1	49.6	826.7
65,0°	33.4	34.7	37.0	36.8	35.8	36.8	38.8	37.6	40.4	42.1	41.9	46.0	872.7
67,5°	29.7	31.0	32.3	32.5	32.0	32.6	33.8	36.5	37.1	35.6	34.6	40.0	912.8
70,0°	25.9	28.0	28.5	28.5	28.1	28.2	29.6	31.2	31.7	30.2	29.9	33.5	946.3
72,5°	21.7	23.7	24.6	25.3	25.5	26.0	25.4	26.6	27.1	26.8	25.0	26.9	973.2
75,0°	17.0	18.4	21.4	20.6	20.1	20.9	20.3	21.1	22.0	20.0	20.2	15.6	988.8
77,5°	12.3	14.7	16.6	16.7	16.2	16.3	15.3	12.3	9.2	7.0	6.0	7.1	995.9
80,0°	7.5	8.6	11.2	12.9	13.0	11.5	9.3	6.4	3.8	1.9	1.2	2.8	998.7
82,5°	3.8	4.4	5.7	8.4	8.1	7.0	4.2	2.7	1.4	0.5	0.4	1.1	999.7
85,0°	1.4	1.4	1.6	1.6	1.8	1.5	0.8	0.5	0.4	0.1	0.1	0.2	1000.0
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7E47N08MB EAN: 4058352898147	LP number 59077_1163
Dimming levels table environmental temperature: 25°C		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	20180	147.0	155.2	151.1
95	237	251	19169	137.0	144.6	140.8
90	221	249	18175	127.5	134.7	131.1
85	205	246	17144	118.4	124.8	121.6
80	190	243	16137	109.7	115.7	112.7
75	176	241	15160	101.7	107.2	104.4
70	162	238	14153	93.8	98.8	96.3
65	148	234	13120	85.9	90.5	88.2
60	135	231	12123	78.6	82.8	80.7
55	122	227	11098	71.4	75.1	73.2
50	110	223	10125	64.8	68.1	66.4
45	97	219	9047	57.6	60.5	59.0
40	86	214	8106	51.6	54.2	52.9
35	74	209	7060	44.9	47.3	46.1
30	63	203	6082	38.9	40.9	39.9
25	52	196	5082	33.0	34.5	33.8
20	41	187	4061	27.1	28.3	27.7
15	30	176	3018	21.2	22.1	21.6
13	25	169	2538	18.5	19.2	18.8

Dimming levels table environmental temperature: 5°C	
--	--

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	20900	148.5	156.9	152.7
95	238	252	19872	139.0	146.8	142.9
90	222	249	18809	129.6	136.9	133.2
85	207	247	17780	120.9	127.5	124.2
80	192	244	16718	112.1	118.4	115.2
75	178	241	15694	104.1	109.8	107.0
70	164	238	14645	96.1	101.3	98.7
65	150	235	13569	88.2	92.8	90.5
60	137	231	12538	80.8	85.1	82.9
55	124	228	11482	73.5	77.3	75.4
50	112	224	10484	66.8	70.2	68.5
45	99	219	9378	59.5	62.5	61.0
40	87	215	8329	52.8	55.5	54.2
35	76	210	7351	46.7	49.2	48.0
30	64	204	6264	40.1	42.0	41.0
25	53	197	5246	34.0	35.6	34.8
20	42	188	4210	28.1	29.2	28.6
15	31	177	3152	22.1	23.0	22.6
12	25	169	2569	18.8	19.6	19.2

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7E47N08MB EAN: 4058352898147	LP number 59077_1163
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	20570	147.7	156.0	151.8
95	237	251	19515	137.8	145.4	141.6
90	221	249	18483	128.2	135.4	131.8
85	206	246	17483	119.6	126.1	122.8
80	191	244	16447	111.0	117.1	114.0
75	177	241	15445	102.9	108.5	105.7
70	163	238	14416	94.9	100.0	97.4
65	149	234	13359	87.0	91.6	89.3
60	136	231	12343	79.7	83.9	81.8
55	123	227	11302	72.5	76.2	74.4
50	111	224	10315	65.7	69.1	67.4
45	98	219	9222	58.5	61.5	60.0
40	87	215	8270	52.5	55.1	53.8
35	75	209	7213	45.8	48.2	47.0
30	63	203	6133	39.2	41.2	40.2
25	52	196	5123	33.2	34.8	34.0
20	41	187	4092	27.3	28.5	27.9
15	30	176	3040	21.3	22.2	21.8
12	25	169	2556	18.7	19.4	19.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7E47N08MB EAN: 4058352898147	LP number 59077_1163
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	20180.0	147.0
5.0	20900.0	148.5
15.0	20570.0	147.7