

Photometric test report

Family
Silica® 21



Order number: **51MX35DB49WB**
EAN: **4058352887035**

LP number
59282_76

serial
documentation
02.08.2023

Version Suspended luminaire, reflector, white, direct-/indirect distribution, narrow distribution, $UGR \leq 16$ ($L65 \leq 3000 \text{ cd/m}^2$)

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 8850 lm
Power consumption = 50.7 W
Luminous efficacy = 174.6 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 957 cd/klm

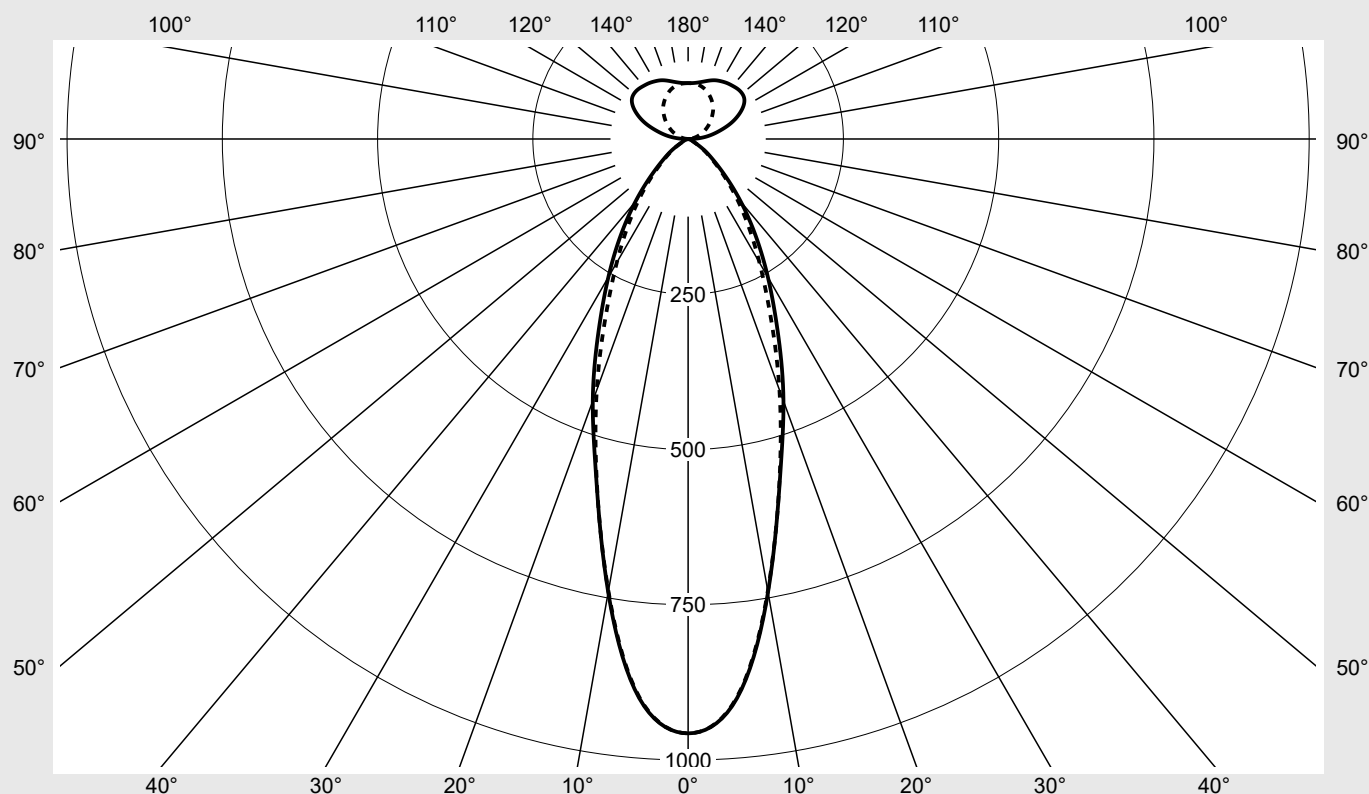

Classifications

DIN 5040 B 7 2
CIE N1=84 N2=98 N3=100
N4=61 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 60.8%
 ϕ_o 39.2%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX35DB49WB EAN: 4058352887035	LP number 59282_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	957.0	957.0	957.0	957.0	957.0	957.0	957.0	5.7	5.7
5°	903.7	904.8	903.5	903.5	903.5	903.6	902.1	43.2	48.9
10°	741.0	743.3	751.7	757.4	754.0	741.9	739.1	71.2	120.1
15°	570.3	575.7	585.0	591.1	585.1	573.7	568.6	82.3	202.4
20°	448.9	449.4	439.6	429.0	425.9	427.3	430.0	81.6	284.0
25°	341.1	338.3	316.4	299.3	306.2	313.5	313.6	73.4	357.4
30°	256.9	254.3	229.0	215.1	226.4	235.7	229.7	64.1	421.5
35°	189.0	189.2	168.7	158.3	167.9	176.3	167.2	54.4	475.9
40°	132.4	132.9	121.3	115.3	121.6	124.9	117.6	43.5	519.4
45°	85.9	86.0	81.6	79.5	82.6	81.6	77.5	31.9	551.3
50°	53.4	54.3	53.5	53.3	54.1	51.5	48.8	22.2	573.5
55°	32.8	33.7	34.4	34.7	34.8	31.8	29.9	15.0	588.5
60°	14.9	16.6	21.1	21.9	21.1	16.6	14.8	8.9	597.4
65°	8.2	8.9	10.2	10.3	10.2	8.6	8.1	4.7	602.1
70°	5.0	5.1	5.0	5.6	5.1	5.2	5.1	2.7	604.7
75°	2.2	2.3	2.5	2.6	2.6	2.4	2.3	1.3	606.0
80°	1.1	1.1	1.2	1.2	1.2	1.2	1.2	0.6	606.7
85°	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.5	607.1
90°	4.5	4.4	4.7	4.6	2.7	0.9	0.3	1.8	608.9
95°	21.0	21.5	23.0	21.8	14.0	7.2	3.7	9.1	618.0
100°	37.6	38.6	39.0	34.1	22.9	12.9	8.5	15.4	633.4
105°	53.9	55.1	54.0	46.1	31.5	19.6	14.3	21.2	654.6
110°	72.5	72.8	68.2	56.8	40.4	26.4	20.5	26.7	681.3
115°	88.6	87.8	81.0	66.6	49.1	33.4	27.3	31.1	712.4
120°	101.9	100.3	91.4	74.6	57.1	40.1	34.0	34.1	746.5
125°	110.6	107.6	97.7	81.9	63.9	46.5	41.1	35.4	782.0
130°	113.6	111.1	100.7	86.2	69.0	53.1	48.2	35.1	817.0
135°	113.4	111.1	101.9	89.1	73.1	59.3	55.4	33.5	850.5
140°	111.6	109.9	102.2	91.2	76.6	65.1	62.8	31.2	881.8
145°	109.7	108.6	102.1	92.3	79.8	70.5	68.8	28.4	910.2
150°	107.2	106.7	101.0	92.2	82.4	75.7	74.3	25.1	935.3
155°	104.3	104.0	98.4	91.9	84.5	80.3	79.2	21.3	956.6
160°	100.1	99.9	95.5	91.1	86.2	83.9	83.7	17.1	973.7
165°	95.7	95.2	92.9	90.0	88.0	86.8	86.9	12.9	986.6
170°	92.3	91.9	91.3	90.1	89.2	89.1	89.1	8.6	995.2
175°	90.4	90.3	89.9	89.7	89.7	89.7	89.7	4.3	999.5
180°	89.9	89.9	89.9	89.9	89.9	89.9	89.9	0.5	1000.0

Photometric test report

Family Silica® 21			Order number: 51MX35DB49WB EAN: 4058352887035							LP number 59282_76	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	15.0	15.9	15.9	16.7	17.7	14.8	15.6	15.6	16.4	17.5
	3H	14.9	15.6	15.7	16.5	17.5	14.6	15.4	15.5	16.2	17.3
	4H	14.8	15.4	15.6	16.3	17.4	14.5	15.2	15.4	16.1	17.2
	6H	14.6	15.2	15.5	16.1	17.2	14.4	15.0	15.3	15.9	17.0
	8H	14.5	15.1	15.4	16.0	17.1	14.3	14.8	15.2	15.7	16.8
	12H	14.4	14.9	15.3	15.8	17.0	14.2	14.7	15.1	15.6	16.8
4H	2H	14.9	15.6	15.7	16.4	17.5	14.6	15.2	15.4	16.1	17.2
	3H	14.7	15.3	15.6	16.2	17.3	14.5	15.0	15.4	15.9	17.1
	4H	14.6	15.1	15.6	16.0	17.2	14.4	14.9	15.3	15.8	17.0
	6H	14.5	14.9	15.4	15.8	17.0	14.3	14.7	15.2	15.6	16.8
	8H	14.4	14.8	15.3	15.7	16.9	14.2	14.6	15.1	15.5	16.7
	12H	14.3	14.6	15.3	15.6	16.8	14.1	14.4	15.1	15.4	16.6
8H	4H	14.4	14.8	15.4	15.7	16.9	14.2	14.5	15.1	15.5	16.7
	6H	14.3	14.6	15.3	15.6	16.8	14.0	14.3	15.0	15.3	16.5
	8H	14.2	14.5	15.2	15.5	16.7	14.0	14.3	15.0	15.2	16.5
	12H	14.2	14.4	15.1	15.4	16.6	13.9	14.2	14.9	15.1	16.4
12H	4H	14.3	14.7	15.3	15.6	16.8	14.1	14.4	15.0	15.3	16.5
	6H	14.2	14.5	15.2	15.4	16.7	14.0	14.2	14.9	15.2	16.4
	8H	14.1	14.4	15.1	15.3	16.6	13.9	14.1	14.9	15.1	16.4

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1470 B = 49	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	14926.5	14946.5	14180.0	13819.3	14355.4	14171.7	13473.4
50°	10210.8	10380.7	10217.8	10183.2	10349.0	9846.8	9321.0
55°	7035.1	7221.9	7373.3	7434.6	7448.9	6807.4	6413.0
60°	3668.8	4082.6	5194.0	5384.9	5195.7	4088.0	3636.6
65°	2386.8	2588.3	2954.3	2988.6	2962.5	2495.0	2367.7
70°	1784.0	1844.7	1790.1	2009.6	1834.6	1861.2	1831.7
75°	1039.2	1113.7	1180.1	1249.0	1224.8	1162.1	1090.4
80°	786.8	796.7	817.2	815.1	849.8	852.6	844.8
85°	1230.7	1232.1	1219.4	1174.3	1172.9	1174.3	1175.7

Photometric test report

Family
Silica® 21

Order number: 51MX35DB49WB
EAN: 4058352887035

LP number
59282_76

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

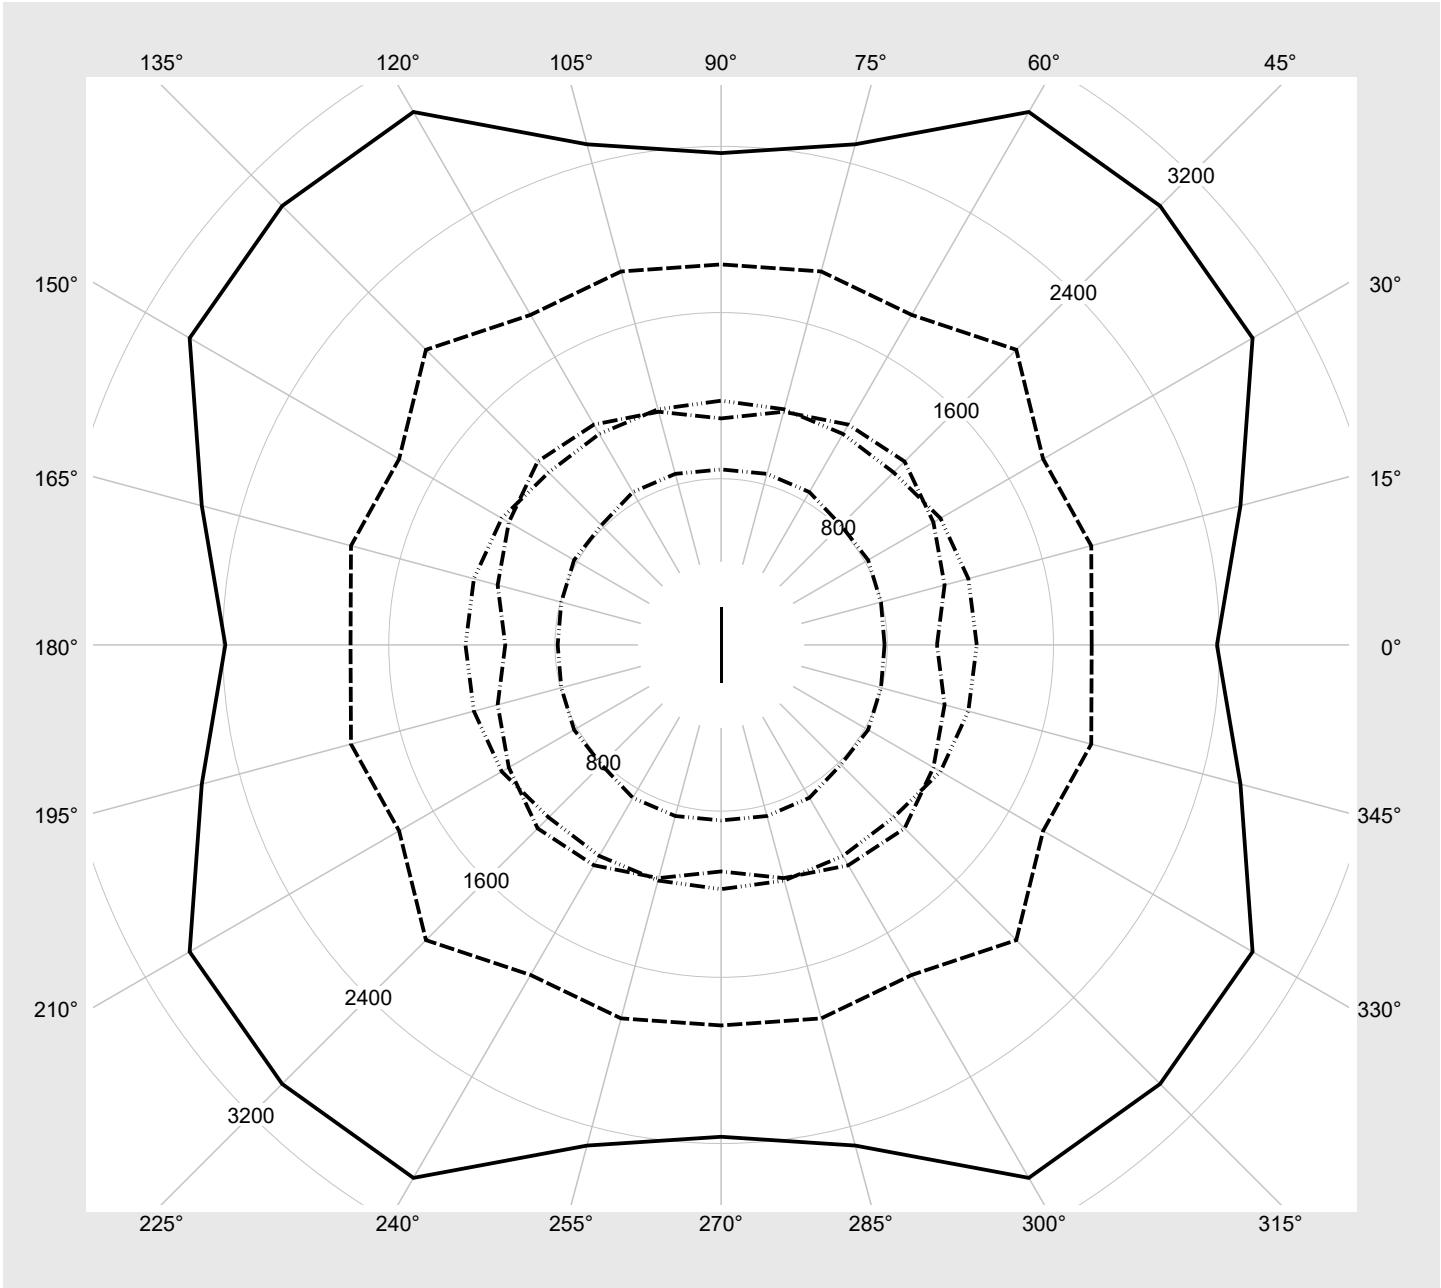

Photometric test report

Family Silica® 21	Order number: 51MX35DB49WB EAN: 4058352887035	LP number 59282_76
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	8850	50.7
95	241	252	8419	48.2
90	227	250	7952	45.5
85	214	248	7514	43.0
80	201	245	7074	40.5
75	188	243	6633	37.9
70	175	240	6189	35.4
65	162	238	5742	32.9
60	149	234	5293	30.4
55	137	231	4876	28.1
50	124	228	4422	25.7
45	111	224	3966	23.1
40	99	219	3543	20.8
35	86	214	3082	18.4
30	74	209	2653	16.2
25	62	202	2223	13.7
20	49	194	1757	11.4
15	37	183	1324	9.1
10	25	169	890	6.9
5	13	145	454	4.9
2	6	117	198	4.2