

Photometric test report

Family
Silica® 21



Order number: **51MX36DB39WB**
EAN: **4058352887059**

LP number
59280_67

serial
documentation
02.08.2023

Version

Suspended luminaire, reflector, white, direct-/indirect distribution, wide distribution, $UGR \leq 16$ ($L65 \leq 3000 \text{ cd/m}^2$)

Lamps

LED 3000 K | CRI ≥ 80

Controlgear

ECG-DALI

Rated values

Net luminous flux = 8820 lm

Power consumption = 53.7 W

Luminous efficacy = 164.2 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 422 cd/klm

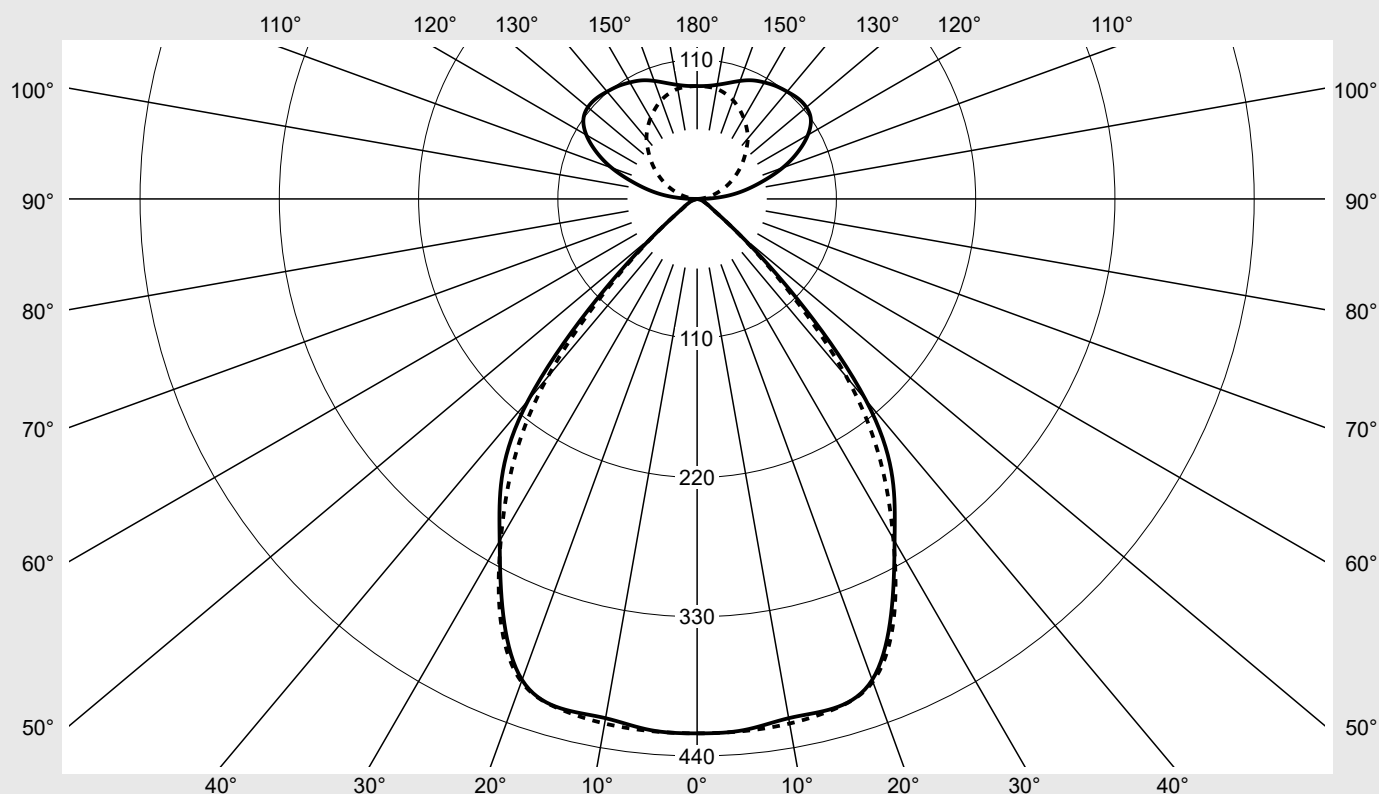

Classifications

DIN 5040 B 6 2
CIE N1=83 N2=98 N3=100
N4=61 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 61.1%
 ϕ_o 38.9%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX36DB39WB EAN: 4058352887059	LP number 59280_67
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	422.1	422.1	422.1	422.1	422.1	422.1	422.1	2.5	2.5
5°	421.2	421.7	421.1	421.4	421.8	422.4	421.9	20.1	22.7
10°	416.4	415.9	416.6	418.5	420.4	419.5	420.7	39.8	62.5
15°	416.5	417.3	416.2	418.2	418.6	417.7	417.3	59.2	121.7
20°	404.3	408.0	408.5	410.6	406.7	404.4	405.8	76.3	198.0
25°	362.4	369.4	376.8	381.5	377.2	370.0	367.2	86.5	284.5
30°	311.9	316.7	317.8	318.8	318.6	312.7	309.9	86.6	371.1
35°	268.9	273.0	262.7	253.0	257.3	257.0	252.3	81.9	453.0
40°	207.2	211.8	206.6	199.5	199.2	191.4	183.8	70.7	523.7
45°	112.3	116.7	117.8	117.4	112.9	104.7	100.2	43.7	567.4
50°	43.9	46.6	49.7	52.0	48.4	44.4	42.8	19.9	587.3
55°	17.8	19.3	22.0	25.4	22.4	18.9	17.4	9.4	596.7
60°	10.9	11.5	12.5	13.7	12.5	11.2	10.7	5.7	602.4
65°	7.0	7.3	7.7	7.8	7.5	7.2	6.9	3.7	606.1
70°	4.8	4.9	4.6	4.4	4.5	4.8	4.7	2.4	608.5
75°	1.9	2.1	2.3	2.3	2.3	2.2	2.0	1.2	609.6
80°	0.9	0.9	0.9	0.9	1.0	1.0	1.0	0.5	610.2
85°	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.4	610.6
90°	4.5	4.3	4.6	4.5	2.7	0.9	0.3	1.8	612.3
95°	20.9	21.3	22.8	21.6	13.8	7.1	3.7	9.0	621.4
100°	37.3	38.3	38.6	33.8	22.7	12.8	8.4	15.2	636.6
105°	53.5	54.6	53.5	45.7	31.3	19.4	14.2	21.0	657.6
110°	71.9	72.1	67.6	56.3	40.1	26.2	20.3	26.5	684.1
115°	87.8	87.0	80.3	66.0	48.6	33.1	27.1	30.8	714.9
120°	101.0	99.4	90.6	73.9	56.6	39.8	33.7	33.8	748.7
125°	109.6	106.6	96.9	81.1	63.3	46.1	40.8	35.1	783.9
130°	112.6	110.2	99.9	85.4	68.4	52.7	47.8	34.8	818.6
135°	112.4	110.1	101.0	88.3	72.5	58.7	54.9	33.2	851.9
140°	110.6	108.9	101.3	90.4	76.0	64.5	62.2	31.0	882.8
145°	108.8	107.6	101.3	91.5	79.1	69.9	68.2	28.2	911.0
150°	106.2	105.8	100.1	91.4	81.7	75.0	73.6	24.8	935.9
155°	103.3	103.0	97.6	91.1	83.7	79.6	78.5	21.1	956.9
160°	99.2	99.0	94.6	90.3	85.5	83.2	82.9	17.0	973.9
165°	94.8	94.3	92.1	89.2	87.2	86.0	86.1	12.8	986.7
170°	91.5	91.1	90.5	89.3	88.4	88.3	88.3	8.5	995.2
175°	89.6	89.5	89.1	88.9	88.9	89.0	89.0	4.3	999.5
180°	89.1	89.1	89.1	89.1	89.1	89.1	89.1	0.5	1000.0

Photometric test report

Family Silica® 21			Order number: 51MX36DB39WB EAN: 4058352887059							LP number 59280_67	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.6	17.5	17.4	18.3	19.3	16.2	17.1	17.0	17.9	18.9
	3H	16.3	17.1	17.2	18.0	19.0	16.0	16.8	16.9	17.7	18.7
	4H	16.2	16.9	17.1	17.8	18.9	15.9	16.6	16.8	17.5	18.6
	6H	16.0	16.7	16.9	17.6	18.7	15.8	16.4	16.7	17.3	18.4
	8H	16.0	16.6	16.9	17.4	18.6	15.6	16.2	16.5	17.1	18.2
	12H	15.9	16.4	16.8	17.3	18.5	15.6	16.1	16.5	17.0	18.2
4H	2H	16.3	17.0	17.1	17.8	18.9	15.9	16.6	16.7	17.4	18.5
	3H	16.1	16.7	17.0	17.5	18.7	15.7	16.3	16.6	17.2	18.3
	4H	15.9	16.5	16.8	17.4	18.5	15.6	16.1	16.5	17.0	18.2
	6H	15.8	16.2	16.7	17.1	18.3	15.5	15.9	16.4	16.8	18.0
	8H	15.7	16.1	16.6	17.0	18.2	15.4	15.8	16.3	16.7	17.9
	12H	15.6	15.9	16.6	16.9	18.1	15.3	15.6	16.3	16.6	17.8
8H	4H	15.7	16.1	16.7	17.0	18.2	15.4	15.8	16.3	16.7	17.9
	6H	15.6	15.9	16.5	16.9	18.1	15.2	15.5	16.2	16.5	17.7
	8H	15.5	15.8	16.5	16.8	18.0	15.2	15.5	16.1	16.4	17.6
	12H	15.4	15.7	16.4	16.6	17.9	15.1	15.3	16.1	16.3	17.5
12H	4H	15.6	16.0	16.6	16.9	18.1	15.3	15.6	16.2	16.5	17.8
	6H	15.5	15.8	16.5	16.7	17.9	15.1	15.4	16.1	16.4	17.6
	8H	15.4	15.7	16.4	16.6	17.9	15.1	15.3	16.1	16.3	17.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1470 B = 49	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	19454.0	20201.9	20404.7	20330.4	19542.1	18129.4	17357.1
50°	8355.4	8872.6	9465.2	9904.1	9226.9	8451.2	8152.1
55°	3792.1	4127.1	4697.3	5422.5	4784.6	4032.3	3709.5
60°	2665.7	2804.6	3053.6	3353.1	3055.6	2747.0	2608.9
65°	2038.9	2119.4	2232.4	2262.6	2183.2	2073.1	1989.1
70°	1716.0	1762.2	1639.4	1579.6	1609.3	1710.6	1686.6
75°	913.1	994.0	1065.0	1110.4	1103.3	1038.9	964.2
80°	636.1	645.9	664.3	669.2	691.8	704.5	698.8
85°	1074.8	1060.7	1055.1	1028.4	1028.4	1034.0	1031.2

Photometric test report

Family
Silica® 21

Order number: 51MX36DB39WB
EAN: 4058352887059

LP number
59280_67

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

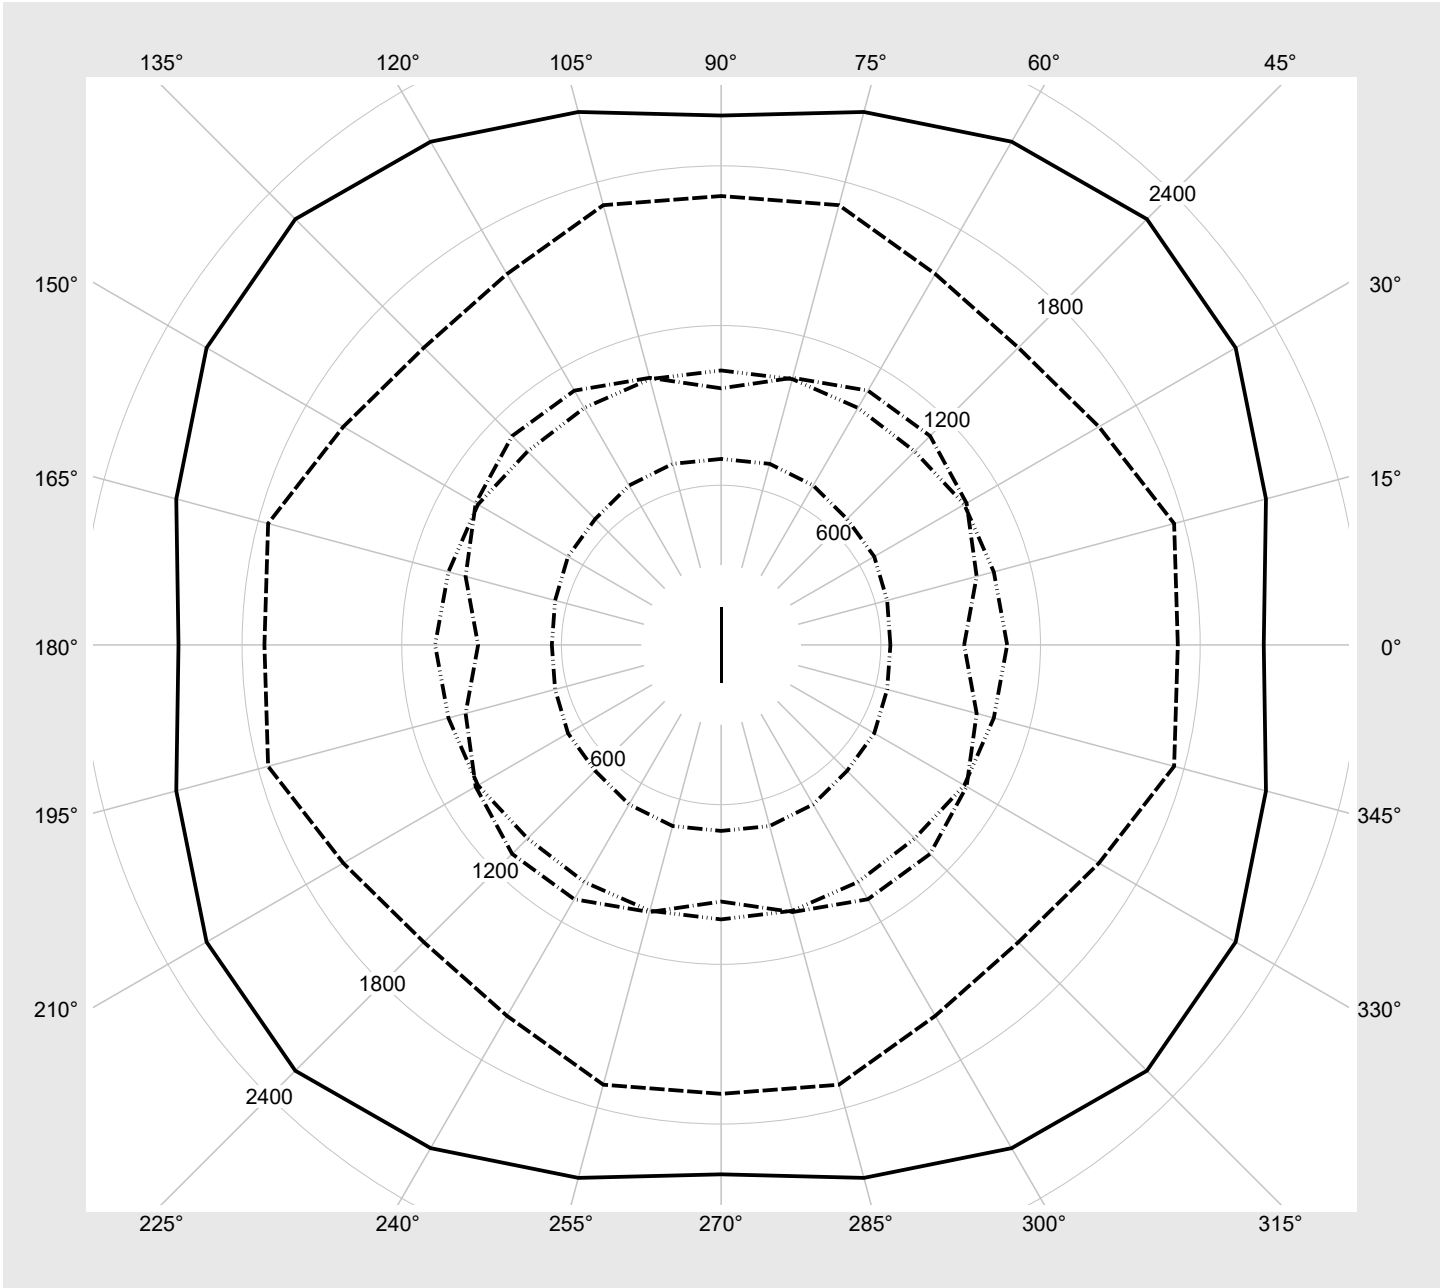

Photometric test report

Family Silica® 21	Order number: 51MX36DB39WB EAN: 4058352887059	LP number 59280_67
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	8820	53.7
95	241	252	8394	51.1
90	227	250	7931	48.2
85	214	248	7499	45.5
80	201	245	7062	42.9
75	188	243	6622	40.2
70	175	240	6182	37.5
65	162	238	5738	34.8
60	149	234	5291	32.2
55	136	231	4841	29.5
50	124	228	4424	27.1
45	111	224	3969	24.5
40	98	219	3511	21.8
35	86	214	3086	19.4
30	74	209	2659	17.0
25	61	202	2192	14.3
20	49	194	1761	11.9
15	37	183	1328	9.6
10	25	169	893	7.2
5	13	145	456	5.0
2	6	117	200	4.2