

Photometric test report

Family
Silica® 21

Order number: 51MX37DB49WB
EAN: 4058352892923

LP number
59284_76




Version Suspended luminaire, reflector, white, direct-/indirect distribution, asymmetric distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 9130 lm
Power consumption = 55.0 W
Luminous efficacy = 166 lm/W

serial documentation
02.08.2023



Luminous intensity in cd/klm **C180-0** **C270-90** **Imax: 452 cd/klm**

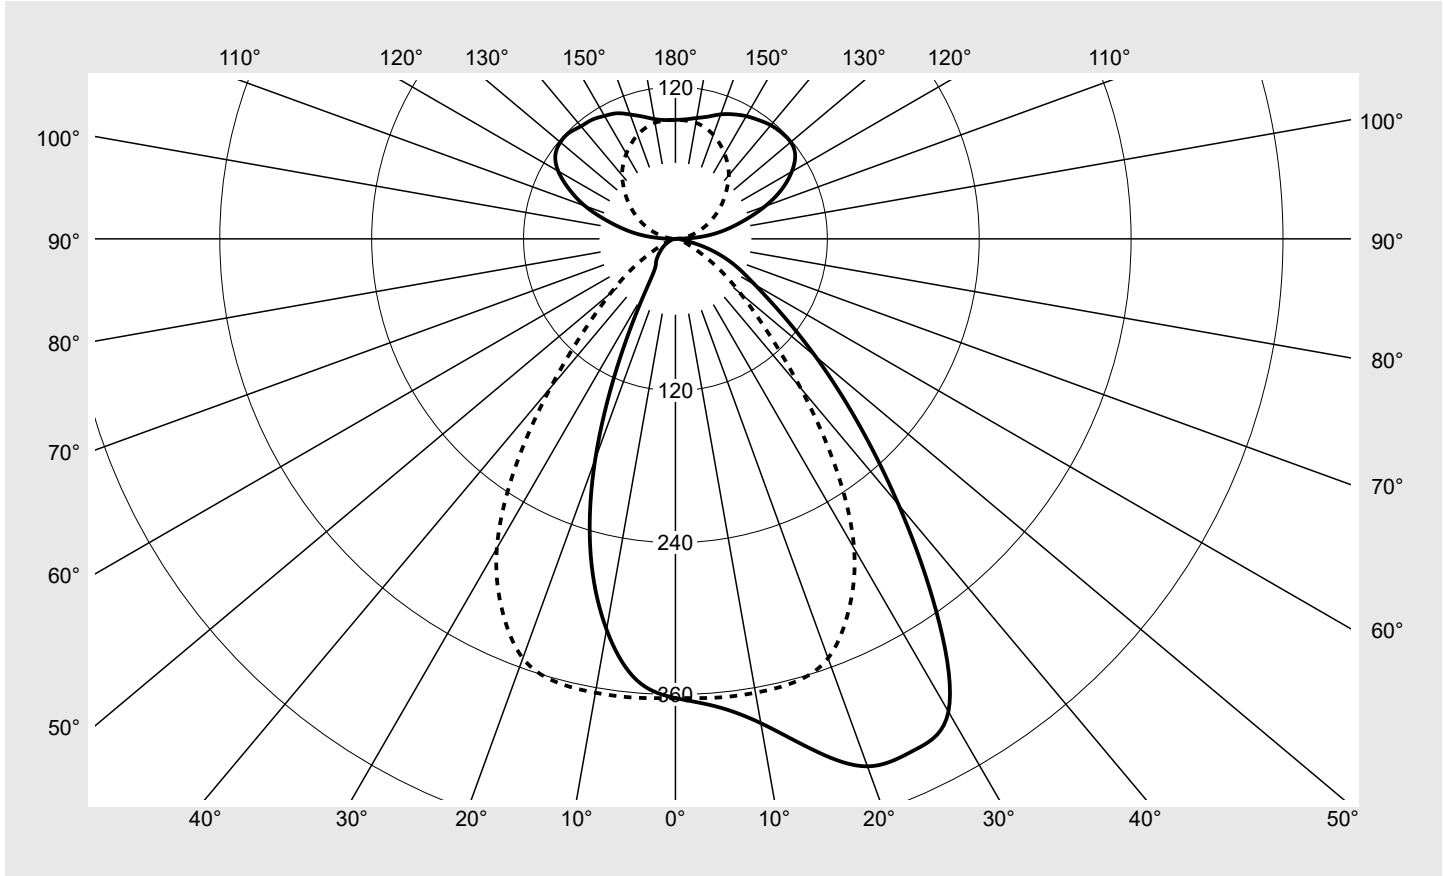

Classifications

DIN 5040	C 5 2
CIE	N1=71 N2=92 N3=99 N4=59 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	59.0%
ϕ_o	41.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX37DB49WB EAN: 4058352892923	LP number 59284_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	362.8	362.8	362.8	362.8	362.8	362.8	362.8
5°	370.9	371.6	370.9	369.3	368.9	367.2	363.9
10°	388.6	388.5	387.1	385.7	381.5	371.9	364.1
15°	417.6	422.5	420.8	414.5	399.0	379.0	362.6
20°	443.5	449.9	449.8	438.4	406.1	374.1	352.6
25°	445.9	451.8	444.0	423.3	391.5	349.7	323.9
30°	431.3	429.9	420.1	385.1	347.8	308.2	282.3
35°	359.2	357.5	355.5	331.7	286.9	244.3	220.9
40°	274.3	279.4	286.0	275.4	231.4	180.4	153.7
45°	201.9	208.2	223.0	216.2	179.6	126.4	101.0
50°	144.4	152.7	166.7	164.5	134.4	88.4	67.1
55°	100.9	110.3	125.4	123.1	101.8	61.8	43.4
60°	72.5	78.2	92.0	93.5	77.9	39.9	24.1
65°	54.7	57.3	65.1	70.1	53.6	24.1	12.4
70°	38.2	41.6	47.1	47.8	32.4	14.4	7.5
75°	21.3	25.0	32.7	24.9	16.8	8.6	4.2
80°	7.7	8.6	12.1	11.3	8.4	4.0	2.2
85°	3.8	3.9	4.0	3.3	2.1	1.6	1.4
90°	4.7	4.6	4.9	4.8	2.9	1.0	0.4
95°	22.0	22.5	24.1	22.9	14.6	7.5	3.9
100°	39.5	40.4	40.7	35.9	24.0	13.5	8.9
105°	56.3	57.6	56.5	48.2	33.0	20.4	15.0
110°	75.5	76.2	71.2	59.4	42.4	27.6	21.4
115°	92.7	91.8	84.6	69.6	51.2	34.9	28.6
120°	106.1	104.5	95.4	77.8	59.8	41.9	35.6
125°	115.5	112.5	102.3	85.9	66.7	48.6	43.0
130°	118.9	116.4	105.4	89.8	72.4	55.5	50.4
135°	118.5	116.1	106.5	93.2	76.8	62.2	57.9
140°	117.2	115.0	106.5	95.4	80.4	68.3	65.6
145°	114.6	113.5	107.0	96.5	83.7	73.9	71.9
150°	111.9	111.4	106.1	96.6	86.1	79.3	77.7
155°	108.5	108.5	103.0	95.9	88.2	84.3	82.8
160°	104.7	104.6	99.8	95.1	90.4	87.6	87.5
165°	100.0	99.6	96.8	93.8	91.9	90.5	90.8
170°	97.0	96.1	95.3	93.8	93.1	93.1	93.1
175°	94.8	94.4	93.7	93.5	93.8	93.7	93.8
180°	94.0	94.0	94.0	94.0	94.0	94.0	94.0

Photometric test report

Family Silica® 21	Order number: 51MX37DB49WB EAN: 4058352892923	LP number 59284_76
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	362.8	362.8	362.8	362.8	362.8	362.8	2.2	2.2
5°	361.1	357.7	355.2	351.7	350.7	350.1	17.3	19.5
10°	354.6	345.8	334.7	324.3	315.6	313.4	34.1	53.6
15°	349.2	329.3	304.2	278.4	262.9	258.7	50.4	104.0
20°	331.4	301.7	258.1	215.5	192.6	185.2	63.8	167.8
25°	301.5	254.0	195.2	148.3	115.3	102.8	70.9	238.7
30°	250.8	197.1	132.9	80.9	53.4	46.2	71.4	310.1
35°	183.1	132.2	77.3	40.6	29.9	28.0	64.3	374.4
40°	120.2	80.2	41.8	27.0	24.2	23.8	54.3	428.7
45°	76.8	47.8	25.9	22.0	20.4	20.0	43.9	472.6
50°	49.9	29.0	19.6	18.1	16.6	16.0	34.5	507.1
55°	31.7	19.0	15.4	14.5	13.2	12.7	26.8	533.9
60°	17.1	12.8	11.6	11.2	10.2	9.6	20.2	554.1
65°	9.9	8.8	8.5	8.3	7.4	6.6	14.7	568.8
70°	6.3	5.9	5.8	5.6	5.0	4.4	10.3	579.1
75°	3.7	3.5	3.4	3.5	3.3	3.0	6.3	585.4
80°	2.1	2.0	2.0	2.1	2.0	2.0	2.8	588.2
85°	1.4	1.3	1.4	1.4	1.4	1.4	1.2	589.3
90°	1.0	2.9	4.8	4.8	4.6	4.7	1.9	591.2
95°	7.5	14.6	22.8	24.1	22.5	22.0	9.5	600.7
100°	13.5	23.9	35.5	40.7	40.4	39.1	16.0	616.8
105°	20.5	32.9	48.2	56.4	57.6	56.5	22.2	638.9
110°	27.6	42.2	59.3	71.4	75.9	76.1	27.9	666.9
115°	34.9	51.3	69.7	84.7	91.8	92.6	32.5	699.4
120°	42.0	59.5	78.1	95.7	105.1	106.9	35.7	735.1
125°	48.7	66.8	85.3	102.0	112.4	115.8	37.0	772.1
130°	55.5	71.9	90.3	105.2	115.9	118.7	36.7	808.7
135°	61.7	76.2	93.0	106.5	116.2	118.6	35.0	843.8
140°	67.8	79.8	95.1	107.1	114.8	116.1	32.7	876.4
145°	73.5	83.2	96.5	106.6	113.5	114.9	29.7	906.2
150°	78.9	86.2	96.2	105.0	111.8	112.2	26.2	932.4
155°	83.7	88.3	96.1	102.8	108.8	109.4	22.2	954.6
160°	87.9	89.8	95.3	99.8	104.2	104.5	17.9	972.5
165°	90.9	92.1	94.4	97.4	99.3	100.0	13.4	986.0
170°	93.1	93.4	94.5	95.5	96.0	96.1	9.0	994.9
175°	93.9	93.7	94.0	94.2	94.4	94.2	4.5	999.4
180°	94.0	94.0	94.0	94.0	94.0	94.0	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX37DB49WB EAN: 4058352892923	LP number 59284_76
-----------------------------	--	------------------------------

siteco

UGR-Table		Standard room									
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.2	23.1	23.0	23.9	25.0	17.9	18.9	18.8	19.7	20.8
	3H	22.7	23.5	23.5	24.3	25.4	17.9	18.7	18.8	19.6	20.7
	4H	22.8	23.5	23.7	24.4	25.5	17.8	18.6	18.7	19.5	20.6
	6H	22.7	23.4	23.6	24.3	25.4	17.7	18.4	18.6	19.3	20.4
	8H	22.6	23.3	23.6	24.2	25.4	17.6	18.3	18.5	19.2	20.3
	12H	22.6	23.1	23.5	24.1	25.2	17.5	18.1	18.5	19.0	20.2
4H	2H	22.4	23.2	23.3	24.0	25.1	18.5	19.3	19.4	20.2	21.3
	3H	23.2	23.8	24.1	24.7	25.8	18.7	19.4	19.7	20.3	21.4
	4H	23.4	24.0	24.3	24.9	26.1	18.7	19.3	19.6	20.2	21.4
	6H	23.4	23.9	24.3	24.8	26.0	18.6	19.1	19.6	20.0	21.2
	8H	23.3	23.8	24.3	24.7	25.9	18.6	19.0	19.5	19.9	21.2
	12H	23.3	23.6	24.2	24.6	25.8	18.5	18.9	19.4	19.8	21.0
8H	4H	23.4	23.8	24.3	24.8	26.0	18.9	19.3	19.8	20.2	21.4
	6H	23.4	23.8	24.4	24.8	26.0	18.8	19.2	19.8	20.2	21.4
	8H	23.4	23.7	24.4	24.7	25.9	18.8	19.1	19.8	20.1	21.3
	12H	23.4	23.6	24.4	24.6	25.9	18.7	19.0	19.7	20.0	21.3
12H	4H	23.3	23.7	24.2	24.6	25.8	18.8	19.2	19.8	20.1	21.4
	6H	23.4	23.7	24.4	24.7	25.9	18.8	19.1	19.8	20.1	21.3
	8H	23.4	23.6	24.4	24.6	25.9	18.8	19.0	19.8	20.0	21.3

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm:											
		L = 1470 B = 49											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	36187.4	37318.7	39976.8	38762.6	32200.7	22658.8	18111.1	13770.2	8562.0	4645.9	3951.9	3663.3	3578.3
50°	28471.6	30102.6	32872.7	32431.6	26502.8	17436.9	13224.9	9839.9	5726.5	3868.3	3566.0	3266.7	3145.2
55°	22300.2	24376.6	27714.4	27196.8	22491.8	13662.7	9582.9	7005.3	4202.9	3395.7	3205.2	2913.3	2797.9
60°	18385.0	19832.0	23325.5	23694.1	19738.2	10126.3	6102.6	4343.3	3252.2	2934.6	2835.5	2579.2	2426.6
65°	16393.5	17185.6	19519.0	21020.7	16072.8	7221.2	3727.4	2956.6	2636.3	2552.6	2492.4	2220.3	1983.4
70°	14151.7	15414.0	17439.7	17696.2	12021.9	5334.4	2778.4	2317.4	2173.9	2138.7	2083.5	1848.6	1619.9
75°	10415.7	12259.0	16004.5	12188.0	8227.5	4197.5	2048.1	1811.5	1729.3	1682.2	1697.9	1604.9	1490.8
80°	5595.7	6268.7	8838.8	8277.5	6108.1	2904.4	1627.8	1508.8	1459.1	1485.4	1524.8	1482.5	1424.1
85°	5561.3	5612.2	5866.7	4845.8	3105.0	2268.7	2009.9	1983.7	1927.0	2005.5	2094.2	2059.3	2018.6

Photometric test report


Family
Silica® 21

Order number: 51MX37DB49WB
EAN: 4058352892923

LP number
59284_76

Luminance values in cd/m²

γ 65° γ 70° γ 75° γ 80° γ 85°

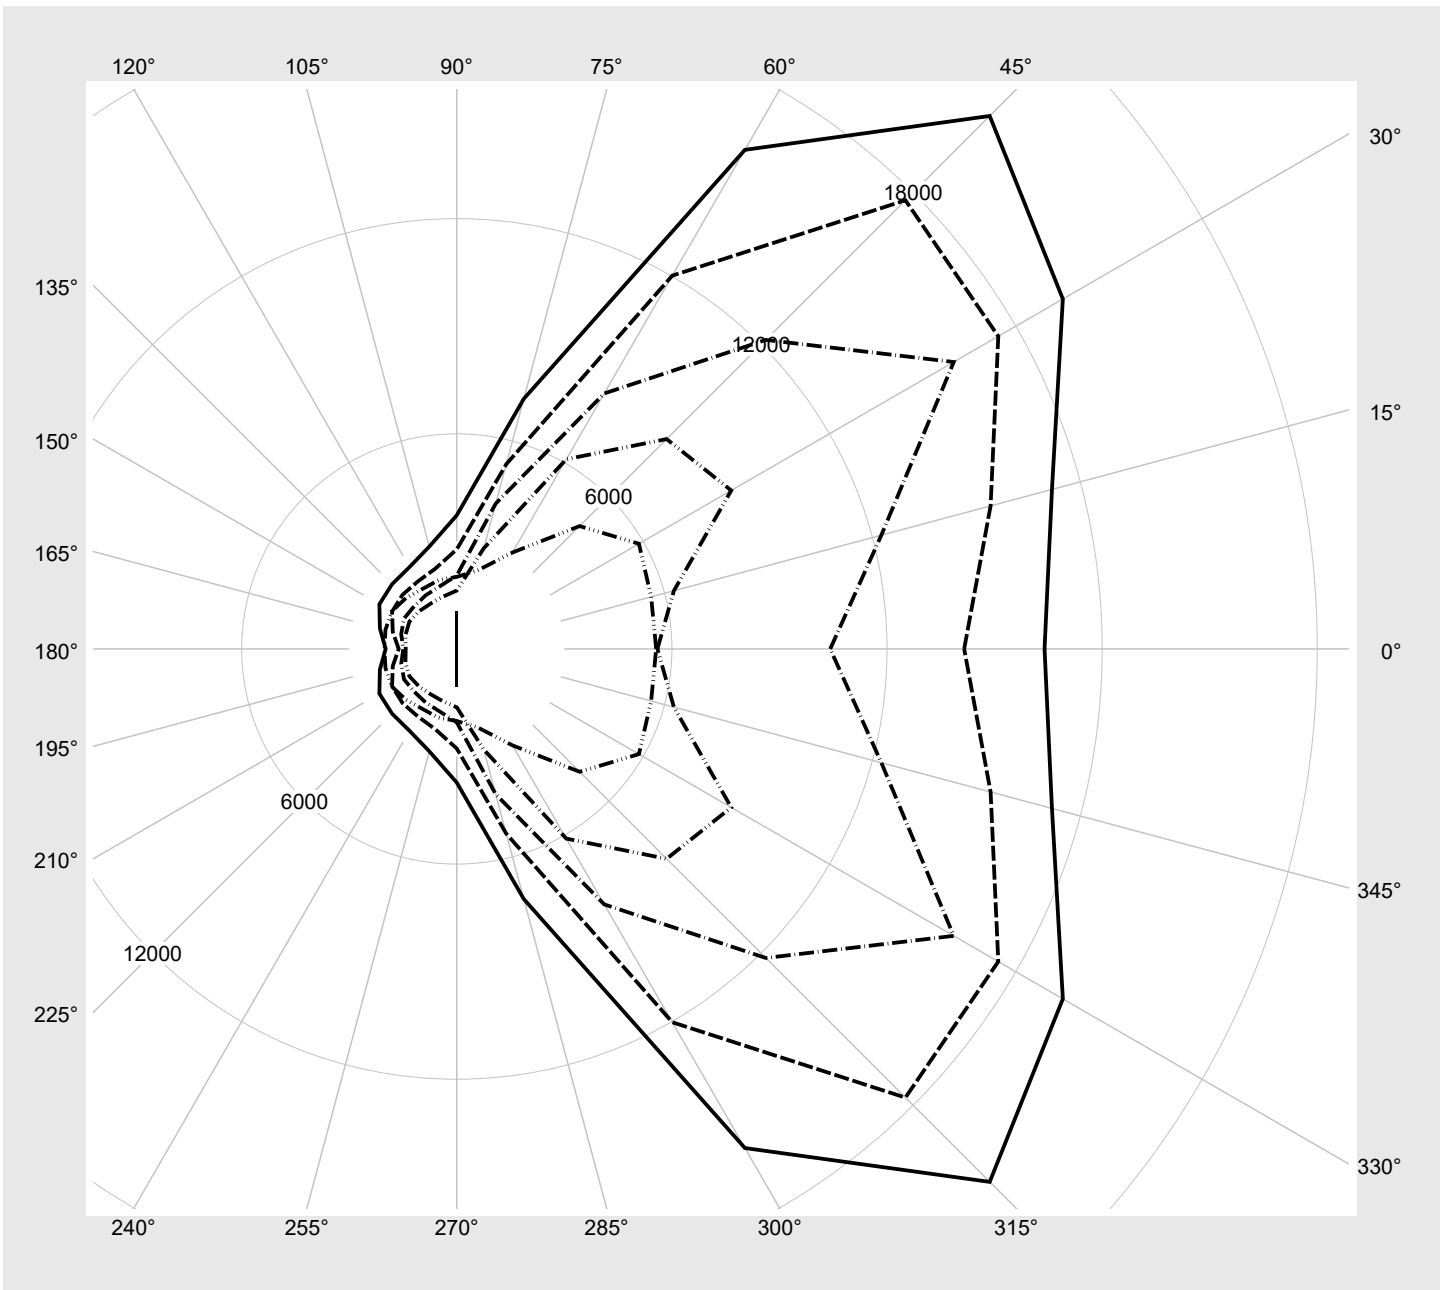

Photometric test report

Family Silica® 21	Order number: 51MX37DB49WB EAN: 4058352892923	LP number 59284_76
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9130	55.0
95	241	252	8688	52.3
90	227	250	8208	49.2
85	214	248	7760	46.4
80	201	245	7307	43.8
75	188	243	6853	41.0
70	175	240	6396	38.3
65	162	238	5936	35.6
60	149	234	5473	32.8
55	136	231	5007	30.2
50	124	228	4575	27.7
45	111	224	4105	25.0
40	99	219	3667	22.5
35	86	214	3191	19.8
30	74	209	2749	17.4
25	61	202	2267	14.7
20	49	194	1820	12.1
15	37	183	1373	9.7
10	25	169	923	7.3
5	13	145	472	5.1
2	6	117	207	4.2