

Photometric test report

Family Streetlight 11 midi LED

Order number: 5XC3E21F08ME
EAN: 4058352559208

LP number
58931_189

serial
documentation
31.07.2023



Version	post-top or side-entry mounting
Optic	direct, asymmetric, left wide distribution ZCL0001
Cover	transparent, PMMA
Lamps	LED 2200 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 12740 lm Power consumption = 124.7 W Luminous efficacy = 102.2 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C270-90

C335-155


C340-160

Imax: 835 cd/klm

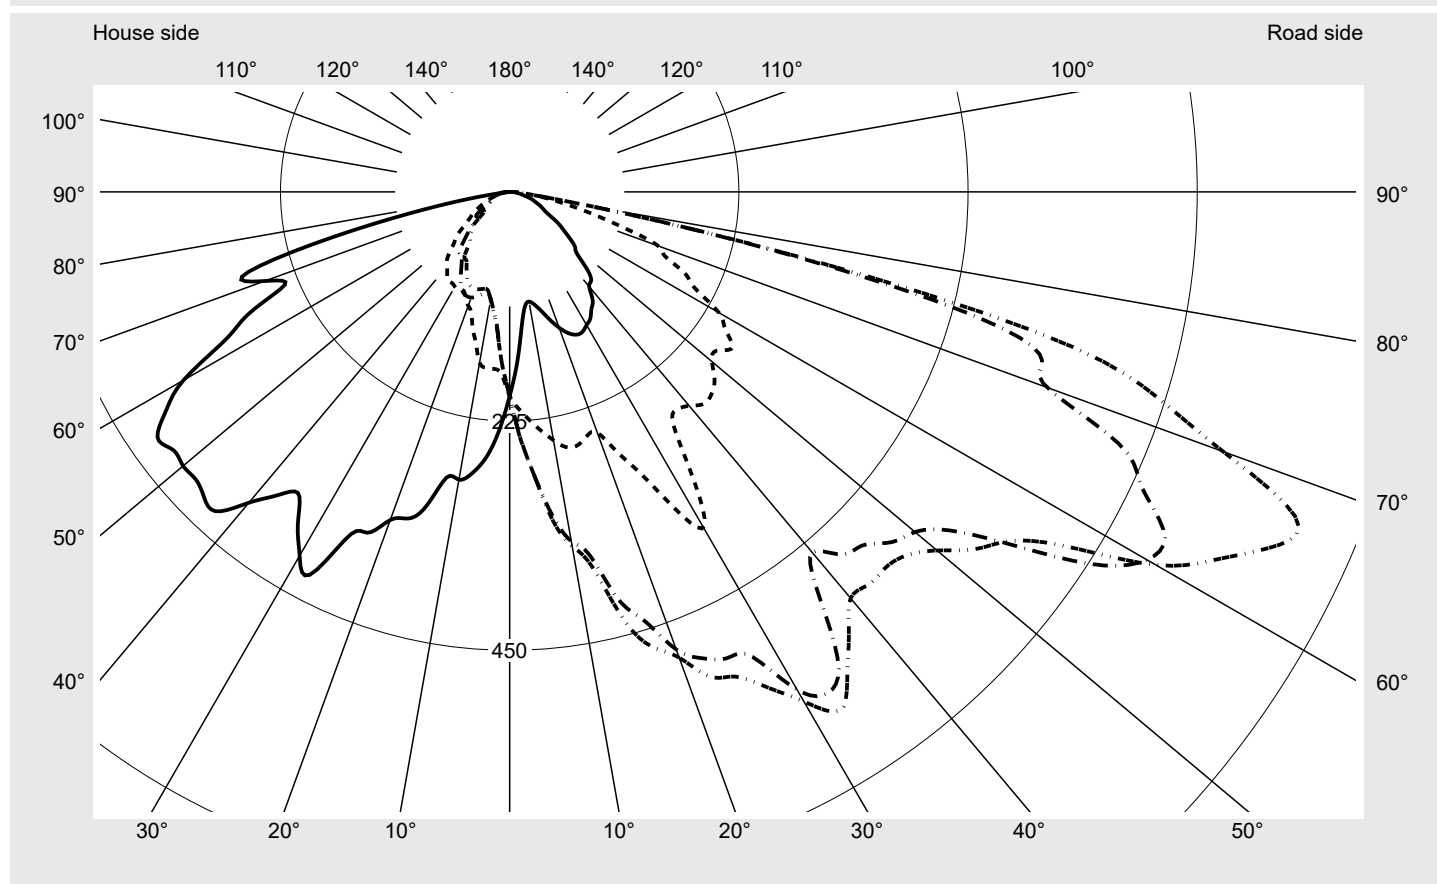

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Envelope curve in cd/klm KMK 67.5° KMK 65° KMK 62.5° KMK 60°		sit eco

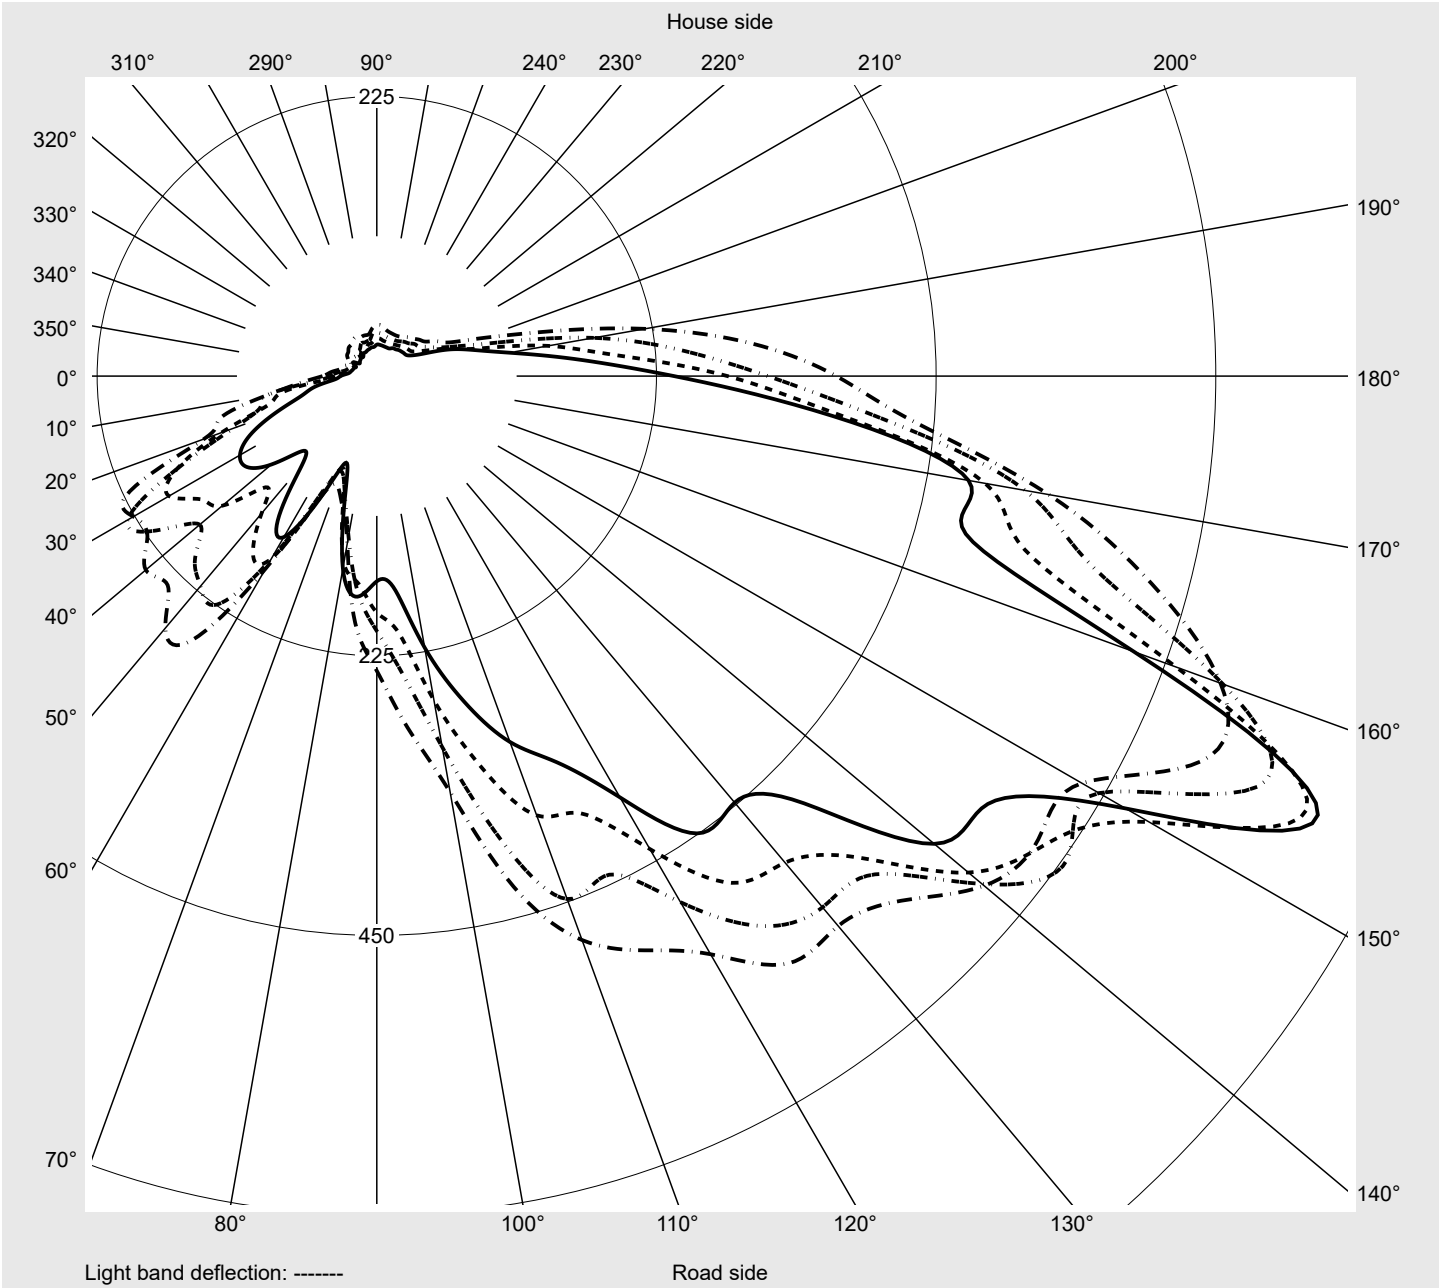

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	167.9	169.0	171.2	173.5	176.5	179.4	180.8	181.8	182.8	184.5	186.5	188.6	190.4	192.8
5,0°	133.9	135.1	138.4	141.8	146.7	150.0	153.9	156.7	161.6	166.9	172.0	176.7	183.4	189.8
7,5°	113.9	115.9	118.8	121.2	125.9	129.4	131.8	134.7	139.8	144.7	150.8	160.2	172.4	177.5
10,0°	109.4	112.0	114.3	116.5	120.0	124.1	126.9	129.0	134.3	141.4	145.7	150.6	157.1	165.1
12,5°	113.7	117.5	119.8	122.4	124.7	127.9	128.1	131.0	132.2	136.9	142.0	153.7	159.8	166.9
15,0°	121.4	126.7	129.2	131.8	133.0	134.5	134.1	134.7	136.1	139.0	141.8	150.4	161.6	167.7
17,5°	131.8	138.6	142.0	144.9	145.5	145.7	143.0	142.2	142.2	144.1	149.4	152.8	156.9	164.3
20,0°	141.8	150.6	155.3	158.1	158.8	158.1	154.9	151.4	150.6	151.4	154.7	154.7	157.5	163.7
22,5°	150.0	161.0	166.9	171.0	172.8	171.8	168.3	162.8	159.4	158.3	157.7	155.1	156.9	164.5
25,0°	154.7	167.3	174.9	180.8	183.7	184.1	180.8	174.3	168.8	165.1	160.6	157.1	157.9	164.7
27,5°	154.9	170.4	180.2	186.5	190.2	192.0	191.0	185.9	180.2	173.0	165.7	160.8	155.9	158.6
30,0°	151.0	167.9	181.6	191.8	195.1	197.1	197.5	194.1	188.8	181.2	173.2	164.1	157.3	158.8
32,5°	147.3	163.2	176.5	188.6	201.8	207.7	204.7	202.6	198.5	191.0	179.8	169.6	159.4	154.3
35,0°	140.0	159.4	177.1	188.3	193.7	206.9	219.6	214.7	206.7	200.0	189.8	175.3	162.4	154.5
37,5°	133.9	149.0	164.3	181.0	199.0	202.2	211.6	227.5	217.5	207.9	196.9	181.6	165.7	154.1
40,0°	121.4	144.1	162.8	178.3	183.9	201.6	218.1	223.6	234.9	218.8	205.7	188.3	167.1	151.6
42,5°	118.4	136.7	150.0	167.9	191.4	199.0	210.0	228.7	235.9	238.3	209.8	192.8	165.5	149.6
45,0°	107.5	125.7	147.1	173.9	190.4	192.6	215.3	224.3	248.1	243.9	223.0	191.8	165.9	144.7
47,5°	89.4	110.4	143.5	160.2	175.5	191.6	211.4	231.0	241.4	260.2	232.6	194.7	162.6	141.6
50,0°	83.7	103.7	124.1	160.8	170.6	191.4	211.6	230.2	249.6	260.4	251.0	204.1	161.8	136.3
52,5°	73.7	99.8	119.0	155.9	201.4	184.3	197.9	232.8	248.3	261.2	270.6	224.7	170.6	129.2
55,0°	63.9	86.7	113.7	151.4	207.9	211.4	202.4	221.2	245.9	266.5	270.4	239.6	177.9	136.9
57,5°	54.9	70.0	100.8	141.6	194.7	242.8	208.5	216.7	251.4	256.1	276.3	253.8	177.3	123.9
60,0°	43.7	61.6	90.6	130.2	147.9	219.2	226.1	225.3	242.6	237.9	264.7	259.6	178.8	108.2
62,5°	37.8	51.2	90.4	96.9	123.0	178.6	231.6	216.5	185.9	206.7	220.8	224.5	169.6	100.8
65,0°	33.7	45.9	78.4	90.8	133.0	177.7	193.0	172.8	162.2	126.5	144.3	173.7	169.2	104.9
67,5°	29.2	34.9	51.2	63.7	86.9	112.6	127.1	127.5	110.6	85.5	93.9	136.9	149.6	109.4
70,0°	25.1	27.3	32.9	43.1	50.2	71.6	75.3	79.2	69.2	73.3	67.3	106.1	116.3	92.0
72,5°	21.6	23.1	25.1	26.5	29.6	34.9	49.6	49.8	55.3	58.6	47.1	63.7	63.9	64.7
75,0°	15.9	17.3	20.8	21.4	23.3	25.3	29.6	36.7	39.2	40.6	38.4	38.8	35.7	46.1
77,5°	12.7	13.7	15.7	16.9	18.4	19.8	22.9	23.5	25.5	26.9	29.0	29.0	29.0	24.9
80,0°	9.8	10.6	11.4	12.9	13.9	14.9	16.9	17.1	18.2	19.4	18.4	19.8	20.6	19.0
82,5°	7.3	7.8	8.6	9.2	10.0	10.8	11.8	12.0	12.7	12.9	12.9	13.5	12.7	13.3
85,0°	5.1	5.5	5.9	6.3	6.7	7.1	7.3	7.8	8.0	8.0	8.0	8.2	7.8	8.4
87,5°	2.4	2.7	2.7	2.9	3.1	3.3	3.3	3.5	3.5	3.7	3.7	3.7	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	196.3	201.2	205.1	209.4	213.6	217.7	220.2	222.6	225.1	228.3	231.0	231.6	232.8	233.0
5,0°	197.7	207.7	214.1	221.2	225.1	230.8	237.5	248.1	261.8	272.0	279.2	286.1	290.2	294.5
7,5°	188.6	200.4	215.3	225.9	236.5	254.7	268.3	283.4	291.4	305.1	324.0	337.3	344.7	341.6
10,0°	181.0	195.7	210.8	228.3	247.5	265.1	294.3	318.7	346.3	370.4	380.4	382.2	387.1	392.6
12,5°	180.2	199.4	216.5	230.2	256.7	277.3	294.3	333.8	357.9	365.9	380.2	399.3	410.4	401.8
15,0°	178.8	196.9	220.8	241.8	257.5	272.0	302.6	323.4	347.5	372.4	387.3	405.1	418.1	426.9
17,5°	176.5	190.4	208.1	227.7	251.6	265.1	297.7	317.7	347.5	377.7	401.4	426.5	459.7	479.3
20,0°	171.8	192.0	212.4	242.2	251.6	282.6	323.0	328.7	367.1	404.0	449.1	469.5	491.2	502.6
22,5°	176.9	196.7	223.2	253.8	276.7	295.7	328.1	351.2	386.3	457.3	492.8	523.0	517.5	522.2
25,0°	173.2	194.7	231.6	270.6	305.9	317.9	341.0	386.3	430.8	472.4	517.7	540.3	552.4	558.7
27,5°	170.6	192.4	237.9	307.5	349.8	368.5	385.3	434.2	475.5	523.2	555.0	566.1	614.4	640.7
30,0°	164.5	183.2	227.9	291.0	380.6	377.3	411.6	476.5	518.7	534.2	565.4	601.8	647.9	649.5
32,5°	158.3	177.7	209.2	265.3	337.5	338.3	409.1	502.0	548.3	579.3	608.3	657.7	686.7	673.8
35,0°	154.9	167.9	187.3	235.3	280.8	327.3	418.7	514.6	594.0	635.8	669.3	716.7	733.4	719.9
37,5°	153.2	162.4	175.9	214.7	269.4	337.1	427.3	508.1	602.4	678.3	729.7	772.4	773.8	741.8
40,0°	147.5	158.1	169.4	202.4	274.3	351.8	456.3	540.1	627.3	693.2	736.9	783.8	768.9	792.2
42,5°	142.6	155.7	168.6	201.2	282.2	373.4	489.3	560.3	625.2	689.7	716.7	754.0	786.8	747.5
45,0°	138.6	149.8	165.7	206.1	280.4	372.4	494.4	555.9	648.9	678.5	729.5	741.1	764.8	757.7
47,5°	135.7	144.1	167.7	204.7	272.8	363.6	474.6	546.1	636.0	674.4	718.9	731.3	744.4	723.6
50,0°	130.0	137.9	169.6	212.8	259.2	340.6	447.3	513.8	596.1	666.5	687.5	716.2	718.5	679.5
52,5°	121.8	129.4	161.0	207.7	256.1	319.1	403.4	493.8	585.6	636.5	659.5	686.0	685.6	657.1
55,0°	114.7	124.5	163.2	222.0	266.7	305.5	382.6	485.3	576.9	597.1	625.4	632.4	641.6	628.3
57,5°	105.1	118.2	150.6	208.5	251.0	309.8	344.9	471.8	528.7	557.5	567.1	608.7	599.9	604.8
60,0°	93.5	107.5	136.5	199.4	237.1	283.8	340.0	425.3	482.8	509.7	537.1	576.9	577.5	596.9
62,5°	82.0	99.2	131.0	174.7	205.1	241.0	303.0	386.5	447.7	442.6	488.7	540.1	557.9	566.9
65,0°	79.0	104.1	152.6	167.7	190.2	208.1	264.9	326.1	376.1	388.1	439.3	497.7	511.0	547.7
67,5°	74.5	97.7	157.1	178.1	165.1	173.2	221.8	271.0	313.2	342.8	391.4	449.1	447.9	486.1
70,0°	73.9	83.3	127.1	166.1	155.3	146.5	179.4	226.9	255.1	291.0	324.2	392.2	401.0	436.5
72,5°	49.2	47.5	83.9	115.3	118.6	116.5	133.0	181.6	190.2	217.5	259.4	302.8	319.4	364.2
75,0°	29.6	31.4	44.3	67.1	85.1	92.6	107.5	128.4	129.2	162.4	216.7	273.2	266.7	250.4
77,5°	24.3	25.3	29.8	42.6	58.8	66.5	79.2	89.8	91.8	116.9	156.5	205.1	193.4	169.0
80,0°	19.0	20.6	21.4	27.1	38.0	43.7	54.9	61.4	64.7	68.4	86.7	98.5	77.7	98.5
82,5°	16.1	15.5	14.5	17.3	23.1	28.4	34.1	39.0	41.6	41.4	41.6	40.0	33.9	35.7
85,0°	10.0	8.4	7.1	8.8	11.6	15.3	17.8	20.0	22.0	21.4	18.8	16.5	14.3	12.7
87,5°	3.1	3.3	2.7	2.9	3.9	4.7	6.1	7.8	7.8	7.3	6.7	6.5	6.5	6.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	235.3	237.7	241.0	242.8	241.6	240.8	237.3	234.9	234.1	227.3	224.3	222.0	219.2	215.1
5,0°	292.2	284.7	280.4	280.2	280.2	280.4	280.2	274.7	261.2	251.2	241.6	235.5	231.8	227.3
7,5°	337.7	334.2	330.8	325.7	320.2	312.2	296.7	285.5	278.1	269.8	260.4	249.4	243.0	238.1
10,0°	385.5	377.7	367.9	353.0	348.1	333.2	317.5	306.5	286.9	273.8	263.6	251.4	241.0	234.9
12,5°	396.5	397.1	389.1	378.3	366.3	341.4	325.9	311.6	287.5	272.0	258.5	244.3	234.1	226.1
15,0°	437.7	454.0	454.0	436.1	415.1	395.9	375.3	348.3	321.0	295.7	281.2	262.4	237.5	219.2
17,5°	496.7	492.8	490.4	468.7	442.0	420.2	394.9	373.0	336.3	298.3	277.9	262.4	241.6	222.0
20,0°	509.9	516.5	499.3	486.7	478.1	451.8	414.0	381.8	342.8	312.6	299.6	269.8	231.2	213.6
22,5°	523.0	528.3	527.7	515.2	495.7	462.8	420.0	388.5	362.2	323.2	287.5	267.9	236.3	212.2
25,0°	591.8	571.6	554.8	525.0	505.0	494.0	474.6	427.1	372.0	328.3	300.6	259.8	224.7	200.8
27,5°	634.2	613.0	576.5	548.5	514.0	496.1	493.6	473.2	423.4	358.5	306.3	262.4	231.8	203.9
30,0°	622.2	609.5	620.1	577.7	564.4	545.0	479.7	439.7	412.4	357.3	304.0	260.6	227.3	200.6
32,5°	661.1	654.6	636.5	603.4	582.8	557.3	500.6	449.1	387.1	353.6	309.4	259.8	229.2	197.9
35,0°	685.4	639.3	638.5	577.9	562.0	492.2	441.8	404.6	361.6	339.8	303.6	254.9	221.0	195.5
37,5°	690.1	660.1	599.9	547.1	498.1	448.7	418.1	403.4	375.7	361.2	333.4	262.4	232.0	194.3
40,0°	724.4	662.4	580.1	520.8	462.0	438.5	417.9	408.5	398.3	366.5	346.7	262.6	226.9	186.3
42,5°	718.5	635.0	558.7	522.4	482.8	445.5	428.3	426.5	425.5	386.5	343.8	274.3	231.8	168.1
45,0°	697.5	603.2	563.4	521.8	490.6	464.6	437.7	435.9	424.2	405.9	333.6	288.9	221.8	144.1
47,5°	654.4	596.5	572.0	528.3	508.9	480.4	448.5	426.1	417.9	405.9	339.1	287.3	203.9	127.5
50,0°	642.0	607.3	586.9	547.7	519.5	489.3	481.0	440.6	418.5	398.9	336.7	268.9	180.6	114.5
52,5°	649.7	628.7	598.9	576.1	546.3	507.7	490.4	441.6	416.3	401.2	318.1	255.7	144.5	101.0
55,0°	618.7	641.6	620.3	597.9	605.4	548.3	494.0	451.2	421.8	390.0	303.2	237.3	111.8	88.4
57,5°	637.3	633.2	630.5	647.5	680.9	614.8	545.7	460.2	400.2	352.8	257.5	196.1	108.2	74.5
60,0°	637.9	649.7	655.0	732.6	722.4	645.4	548.9	436.5	369.8	302.4	219.0	136.9	89.0	64.1
62,5°	635.6	678.1	670.9	781.7	724.4	597.7	529.7	412.4	314.7	244.1	177.1	106.5	70.6	54.5
65,0°	621.4	656.9	717.5	825.4	684.4	539.7	497.1	378.3	282.2	193.2	140.0	86.1	64.9	50.2
67,5°	585.4	600.1	695.6	835.4	648.3	490.6	483.4	368.1	239.2	159.0	108.4	81.0	62.9	43.7
70,0°	510.8	559.9	645.6	745.4	561.4	494.8	476.9	379.3	255.9	158.6	93.5	72.2	52.4	34.7
72,5°	396.5	464.8	568.7	663.8	547.9	489.1	448.3	380.6	275.1	162.2	86.1	61.8	37.5	28.2
75,0°	283.4	345.7	487.3	543.6	476.7	434.2	388.5	315.3	204.5	90.0	57.7	48.4	25.3	22.9
77,5°	172.8	199.0	248.5	275.5	266.1	278.1	224.7	180.8	112.2	64.3	41.6	33.3	20.0	16.7
80,0°	98.7	99.8	99.1	82.4	82.0	96.9	72.4	55.1	47.7	29.0	24.1	21.6	15.9	10.4
82,5°	37.8	41.6	31.6	23.5	21.4	18.4	15.9	14.1	12.2	11.0	9.6	8.4	7.6	6.9
85,0°	12.0	12.0	12.0	12.0	11.4	10.8	9.8	8.8	8.0	6.7	5.9	5.1	4.7	4.3
87,5°	7.1	7.3	7.6	7.6	7.1	6.7	6.1	5.3	3.5	4.1	3.5	3.1	2.7	2.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	210.8	209.0	206.3	204.5	201.4	199.4	196.3	192.8	189.2	186.5	184.5	182.6	179.6	177.1
5,0°	223.4	220.8	213.6	205.1	197.3	190.0	184.5	181.4	179.8	179.0	177.5	176.7	174.5	172.4
7,5°	230.6	225.3	219.0	211.6	196.3	190.0	188.3	185.7	179.8	173.2	169.8	174.7	174.3	173.7
10,0°	232.4	227.9	226.7	218.1	198.8	189.8	178.3	171.2	170.2	169.8	170.4	168.8	170.2	165.1
12,5°	220.8	218.1	206.9	202.0	179.8	170.6	164.7	163.7	158.6	158.3	156.1	157.3	152.6	147.7
15,0°	209.4	203.9	196.9	184.5	165.1	159.6	149.0	149.6	148.8	146.5	143.9	143.2	139.8	128.8
17,5°	205.9	191.8	182.0	179.6	172.6	155.1	146.9	141.8	139.2	135.7	129.4	126.7	124.9	121.2
20,0°	199.2	184.9	176.9	171.6	168.8	161.2	151.6	142.4	134.9	126.3	121.4	118.8	119.0	111.0
22,5°	190.8	175.7	161.4	156.7	156.5	152.6	149.4	141.2	134.3	131.0	123.3	118.6	112.8	99.0
25,0°	182.8	165.9	152.6	143.7	138.4	134.1	136.1	132.6	127.7	132.4	124.5	116.3	107.1	97.1
27,5°	177.3	158.8	145.1	136.7	129.6	123.9	119.8	119.4	119.2	122.6	118.4	117.1	108.4	97.3
30,0°	172.8	154.3	142.8	130.8	122.8	115.9	111.0	114.5	116.9	112.2	114.7	114.3	107.5	100.4
32,5°	173.7	150.8	135.5	125.3	115.1	107.3	103.1	105.9	106.1	100.8	106.7	108.2	105.9	103.1
35,0°	165.1	138.8	127.5	113.5	105.5	98.4	94.7	94.3	97.3	92.4	95.5	104.5	105.9	100.8
37,5°	150.6	127.9	116.9	105.3	94.5	87.9	85.7	85.7	87.1	84.1	84.5	97.9	100.8	95.5
40,0°	135.3	116.7	105.9	93.9	84.7	78.2	76.3	78.2	79.8	76.9	77.5	84.9	95.9	90.8
42,5°	129.0	109.8	96.5	84.1	76.3	71.0	70.2	71.2	71.4	70.8	72.6	79.6	91.4	87.3
45,0°	121.2	102.0	90.0	76.9	70.2	66.1	64.9	64.9	65.3	66.3	69.4	73.3	82.8	80.4
47,5°	112.0	97.3	82.6	72.6	65.9	61.6	60.0	60.2	60.2	62.0	67.7	70.0	73.9	74.7
50,0°	100.2	89.4	76.1	66.3	61.4	57.1	55.3	54.5	55.3	56.9	61.8	63.3	68.4	65.7
52,5°	89.6	79.0	67.5	60.8	56.1	52.4	50.0	49.4	50.2	51.8	56.9	55.5	58.8	57.1
55,0°	77.3	68.2	59.6	54.5	51.0	47.7	45.3	44.7	45.3	46.9	49.4	50.8	50.6	52.2
57,5°	64.9	57.3	51.8	48.8	45.9	43.3	40.8	40.4	40.6	41.6	43.7	46.9	45.1	44.1
60,0°	56.1	48.4	45.3	42.4	40.6	38.4	36.7	36.1	36.3	36.9	38.6	41.0	40.8	39.0
62,5°	47.1	41.4	40.0	37.1	35.7	34.1	32.6	32.2	32.0	32.4	33.3	34.5	35.1	34.9
65,0°	40.2	34.7	33.3	32.4	31.2	30.0	29.2	28.6	28.2	28.6	29.0	30.2	30.2	28.4
67,5°	33.5	29.4	28.6	28.0	27.3	26.3	25.9	24.5	24.3	24.5	24.9	25.3	25.3	23.7
70,0°	27.8	24.7	24.1	23.7	23.3	22.9	22.4	21.0	20.8	21.0	21.2	21.8	21.0	20.2
72,5°	23.3	20.2	19.8	19.4	19.6	19.8	19.2	18.2	17.5	17.3	17.3	18.0	17.1	16.3
75,0°	17.8	16.5	15.7	15.5	15.9	16.5	16.3	15.1	14.7	14.3	14.1	14.1	13.5	13.3
77,5°	13.3	12.7	12.0	12.0	12.9	13.3	13.3	12.0	11.4	11.2	11.2	10.8	10.4	10.2
80,0°	9.6	9.2	8.8	8.8	9.4	10.0	9.8	9.2	8.6	8.4	8.4	8.0	7.3	6.7
82,5°	6.5	6.3	5.9	5.9	6.1	6.3	6.7	6.3	5.7	5.5	5.7	5.5	4.7	3.5
85,0°	3.9	3.7	3.5	3.5	3.3	3.3	3.3	3.3	3.3	3.3	2.7	2.9	2.9	2.4
87,5°	2.0	1.8	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.2	1.0	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	176.7	177.9	178.8	179.6	179.6	180.4	180.4	178.3	175.3	172.8	170.6	169.8	169.8	169.2
5,0°	170.2	169.2	169.0	168.1	167.7	165.1	156.1	148.4	142.8	140.0	138.4	137.9	136.3	135.3
7,5°	173.0	168.1	159.8	151.8	140.4	129.6	126.3	125.3	124.9	121.2	120.2	119.6	118.8	117.1
10,0°	159.6	156.3	147.7	130.6	124.9	122.6	120.8	116.9	112.6	109.6	108.8	107.7	106.7	106.7
12,5°	141.2	137.7	129.4	120.6	116.5	106.7	102.8	100.4	100.4	99.2	96.7	99.0	101.6	105.1
15,0°	124.9	119.6	110.4	103.3	90.2	87.7	85.9	85.1	85.9	88.2	92.6	98.6	103.9	108.8
17,5°	111.8	100.6	88.6	78.8	75.7	75.7	75.3	76.7	80.4	86.5	93.5	100.2	107.7	114.5
20,0°	94.3	84.3	77.5	72.6	69.4	67.7	69.0	72.4	77.7	84.7	92.4	101.2	110.4	119.2
22,5°	90.2	79.2	70.6	69.0	65.7	65.3	65.3	68.2	73.7	81.0	90.8	100.2	110.6	121.6
25,0°	86.7	76.1	71.6	69.4	65.3	62.6	62.0	63.7	69.2	77.3	86.9	97.3	108.6	121.8
27,5°	88.4	77.5	71.8	70.0	67.3	61.2	57.1	59.8	65.1	73.1	82.0	91.0	103.5	120.2
30,0°	89.6	77.7	73.5	71.0	66.5	59.8	56.9	57.5	61.4	71.8	78.4	84.7	96.1	110.8
32,5°	92.8	76.3	72.8	68.0	63.5	59.8	58.2	58.2	59.2	63.9	70.8	79.4	88.4	104.5
35,0°	86.7	75.9	71.6	63.9	63.5	60.4	60.4	58.8	57.5	58.2	64.5	77.5	81.8	98.4
37,5°	82.4	78.8	72.0	64.5	62.4	60.8	61.4	63.5	57.7	53.7	56.5	66.1	77.1	89.4
40,0°	81.4	77.3	73.3	66.7	61.8	58.2	58.0	60.8	58.4	53.3	55.3	60.8	76.9	79.8
42,5°	78.6	70.8	71.6	65.3	61.4	58.8	57.1	58.4	62.4	64.3	56.9	58.2	68.2	76.5
45,0°	71.0	65.9	65.1	59.6	59.0	58.0	55.7	58.4	68.0	68.4	52.2	51.8	59.2	67.7
47,5°	65.3	61.4	58.8	56.3	53.1	48.6	58.2	68.4	68.2	57.5	50.0	48.0	51.2	64.7
50,0°	58.6	59.4	55.1	52.2	49.6	52.4	66.3	81.4	61.0	48.4	42.9	37.1	42.4	51.4
52,5°	51.4	53.3	50.6	48.4	47.3	61.0	74.9	66.1	48.4	40.6	34.9	31.8	40.6	43.5
55,0°	44.7	46.5	45.3	44.1	55.1	71.4	65.9	56.3	40.4	31.6	31.2	34.1	39.8	38.6
57,5°	39.8	39.8	39.2	40.4	46.7	51.8	49.0	41.4	34.7	29.4	28.0	30.0	33.5	31.4
60,0°	34.7	34.1	34.1	33.9	35.5	33.5	32.4	32.0	30.0	29.2	26.5	25.3	25.7	29.2
62,5°	30.2	29.2	28.8	29.2	26.5	25.1	25.3	23.3	23.7	22.9	23.9	22.2	21.6	23.7
65,0°	26.7	26.3	24.3	24.3	23.5	22.2	20.8	21.4	20.2	19.8	21.4	19.6	20.2	21.4
67,5°	23.5	22.7	22.0	21.2	21.0	19.0	19.2	18.6	17.8	17.8	22.0	18.6	19.2	20.0
70,0°	19.4	19.6	19.2	18.4	17.5	16.7	16.1	15.9	15.9	16.5	19.8	17.5	18.0	18.6
72,5°	16.1	16.3	16.1	15.1	14.7	14.5	14.1	14.1	14.3	14.9	15.9	15.7	15.9	16.3
75,0°	13.1	13.3	13.3	12.4	12.4	12.2	12.2	12.2	12.4	12.9	13.3	13.5	13.9	14.1
77,5°	10.0	10.6	10.6	10.0	10.0	10.0	10.0	10.0	10.2	10.6	10.8	11.0	11.2	11.4
80,0°	7.1	7.8	8.0	7.6	7.6	7.6	7.6	7.8	8.0	8.2	8.4	8.6	8.6	8.8
82,5°	4.5	5.7	5.3	5.3	5.3	5.5	5.7	5.7	5.9	6.1	6.1	6.3	6.5	6.7
85,0°	2.9	3.1	3.3	3.3	3.5	3.7	3.9	4.1	4.1	4.3	4.5	4.5	4.5	4.7
87,5°	1.2	1.4	1.6	1.8	2.0	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Table of values for luminous intensities		Maximum luminous intensity sITeco

C- planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd / Luminous flux in lm/klm				
0,0°	200.4	200.4	0.3	0.3
2,5°	168.6	167.9	2.4	2.7
5,0°	134.5	133.7	4.8	7.5
7,5°	115.3	113.5	7.3	14.8
10,0°	107.3	107.3	9.9	24.7
12,5°	107.5	110.2	12.2	36.9
15,0°	113.3	116.7	14.9	51.8
17,5°	120.8	125.5	17.6	69.4
20,0°	127.5	134.1	20.6	90.0
22,5°	132.2	140.8	23.7	113.6
25,0°	134.3	144.7	27.0	140.6
27,5°	132.0	142.8	30.9	171.5
30,0°	125.5	138.6	33.9	205.4
32,5°	125.1	135.7	36.8	242.2
35,0°	115.9	126.9	38.9	281.1
37,5°	109.4	122.2	41.1	322.3
40,0°	97.1	109.0	43.3	365.6
42,5°	87.7	103.3	45.3	410.9
45,0°	76.1	92.0	46.9	457.9
47,5°	65.9	80.0	47.9	505.7
50,0°	57.1	70.6	48.6	554.3
52,5°	48.8	56.9	49.2	603.5
55,0°	44.5	51.0	49.8	653.4
57,5°	36.1	44.3	49.8	703.1
60,0°	30.6	36.9	48.9	752.0
62,5°	25.9	31.8	46.3	798.4
65,0°	23.5	27.5	43.5	841.8
67,5°	21.2	23.5	39.4	881.2
70,0°	19.2	20.4	35.2	916.3
72,5°	16.7	17.5	29.9	946.3
75,0°	14.5	15.1	23.8	970.0
77,5°	11.6	12.0	15.3	985.4
80,0°	9.0	9.4	7.8	993.2
82,5°	6.7	6.9	3.8	997.0
85,0°	4.7	4.9	2.0	999.1
87,5°	2.4	2.4	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21F08ME EAN: 4058352559208	LP number 58931_189
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	12740	124.7	132.2	128.4
95	241	252	12088	117.0	124.0	120.5
90	229	250	11486	110.0	116.6	113.3
85	216	248	10834	102.7	108.8	105.8
80	203	246	10182	95.6	101.3	98.4
75	190	243	9530	88.7	93.9	91.3
70	178	241	8928	82.4	87.3	84.8
65	165	238	8276	75.8	80.2	78.0
60	152	235	7624	69.3	73.3	71.3
55	140	232	7022	63.4	67.1	65.2
50	127	229	6370	57.1	60.4	58.8
45	114	225	5718	50.9	53.9	52.4
40	102	221	5116	45.3	47.9	46.6
35	89	216	4464	39.3	41.6	40.4
30	76	210	3812	33.5	35.4	34.4
25	63	203	3160	27.8	29.3	28.6
20	51	195	2558	22.6	23.8	23.2
15	38	184	1906	17.1	18.0	17.6
13	33	179	1655	15.1	15.8	15.4