

Photometric test report

Family
Streetlight 11 midi LED

Order number: 5XC3F21F08ME
EAN: 4058352559253

LP number
58932_190



Version post-top or side-entry mounting
Optic direct, asymmetric, right wide distribution
 ZCR0001
Cover transparent, PMMA
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 12740 lm
 Power consumption = 124.7 W
 Luminous efficacy = 102.2 lm/W

serial
documentation
31.07.2023

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 835 cd/klm

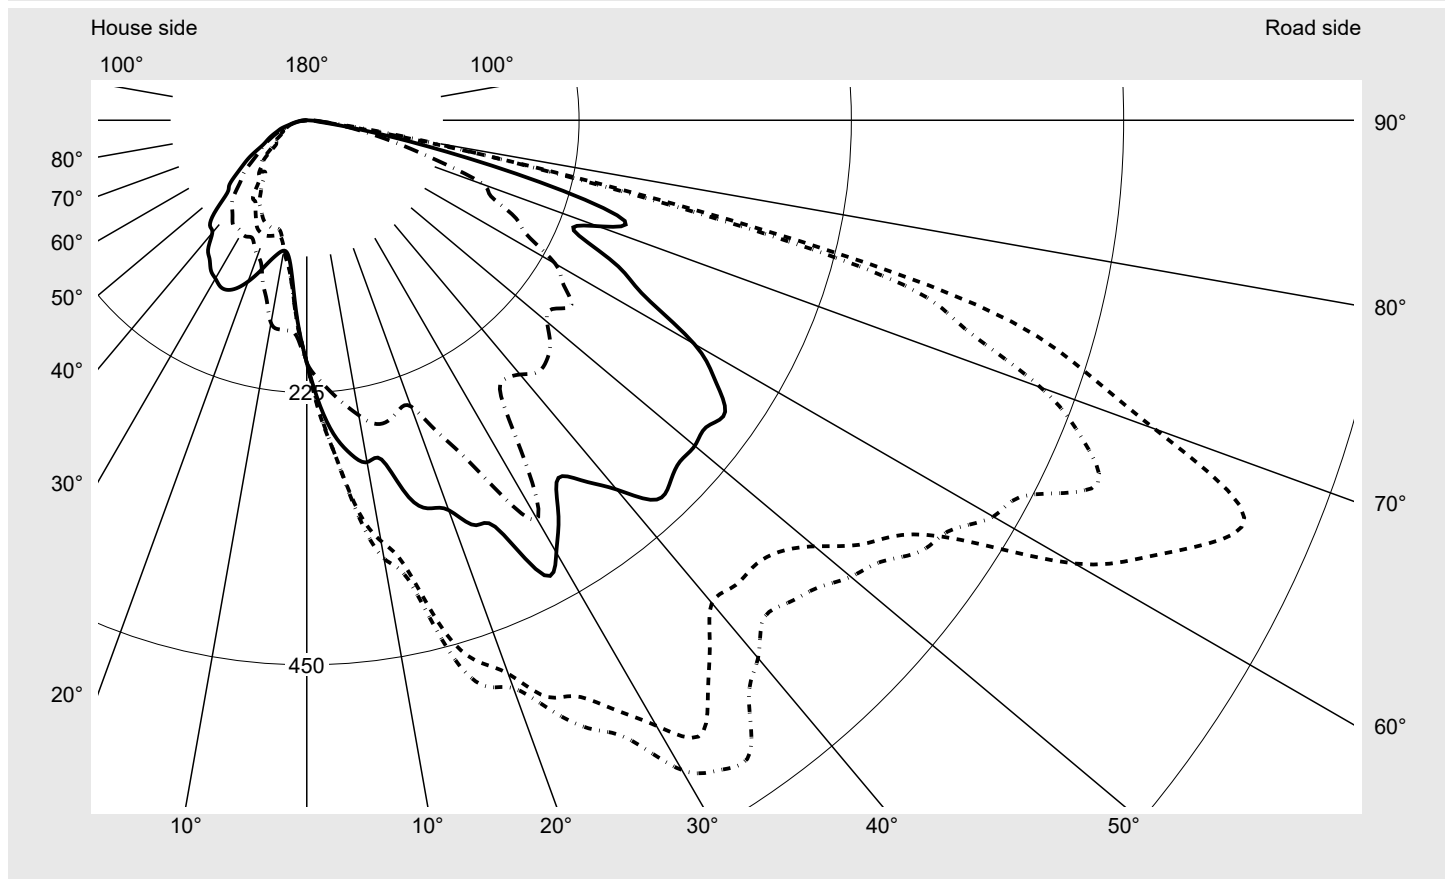

Photometric test report

Family
Streetlight 11 midi LED

Order number: **5XC3F21F08ME**
EAN: **4058352559253**

LP number
58932_190

Envelope curve in cd/klm


KMK 67,5°

KMK 65°

KMK 62,5°

KMK 60°

siteco

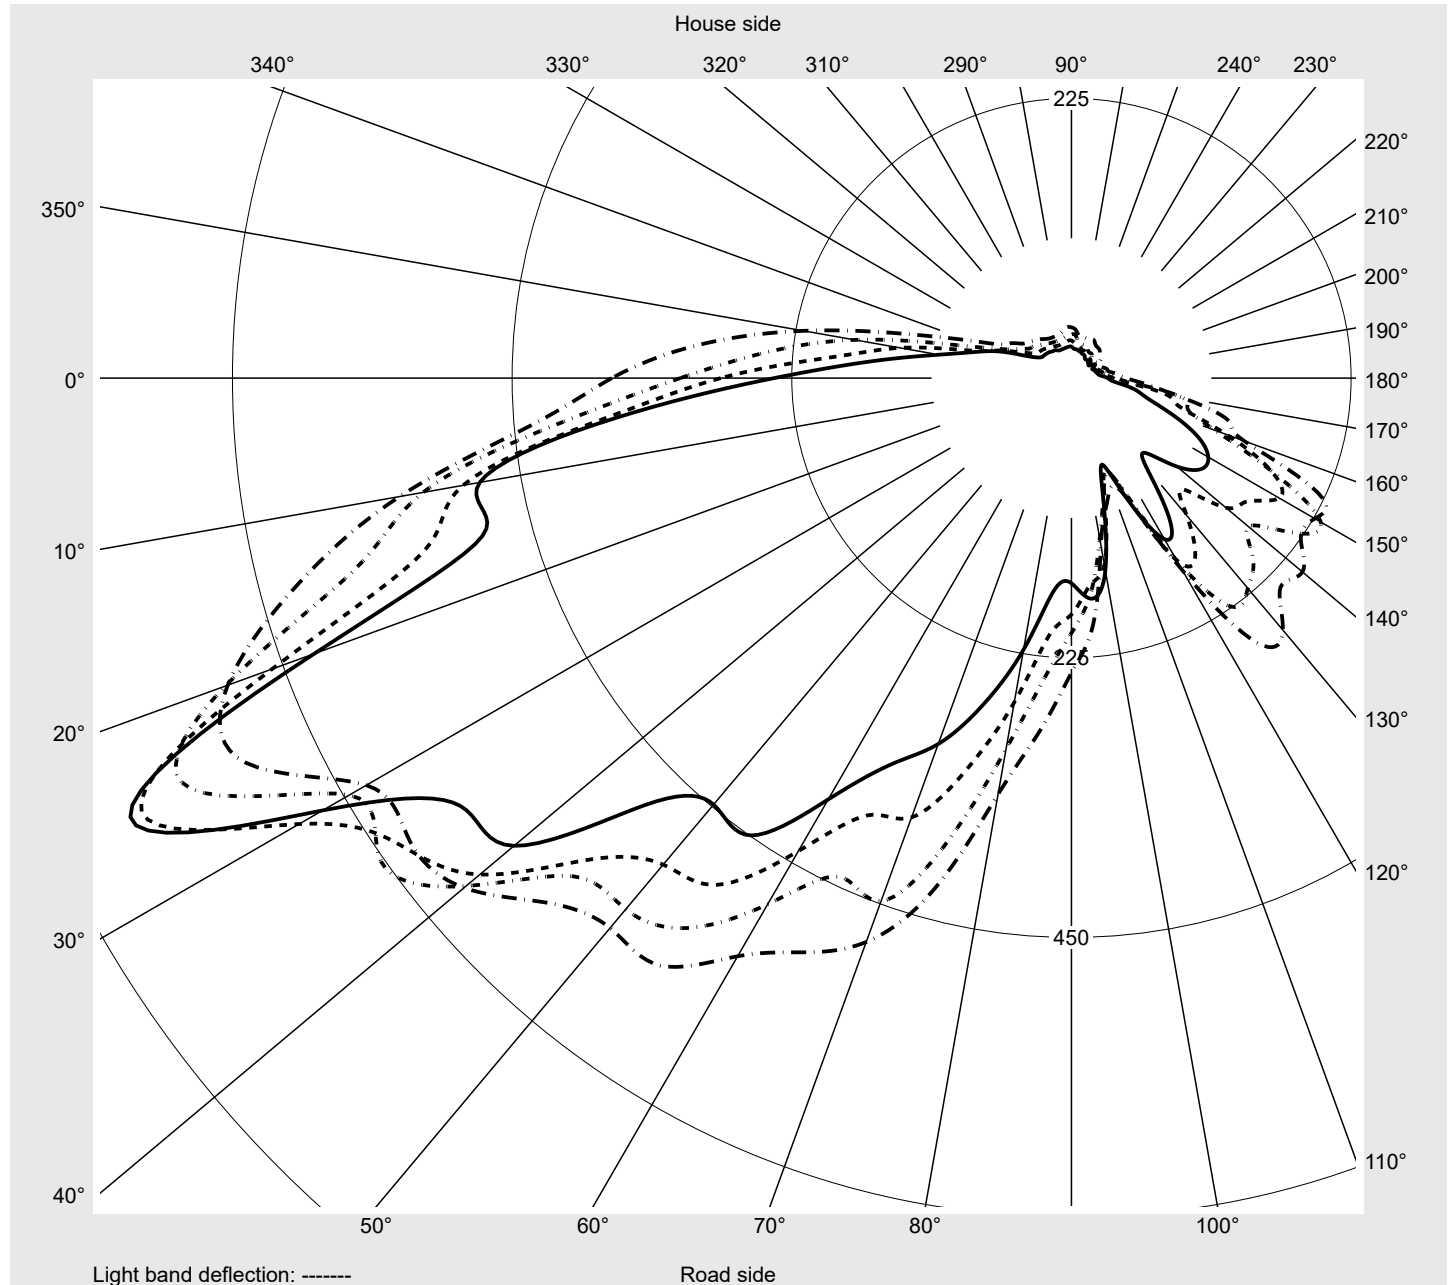

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	234.1	234.9	237.3	240.8	241.6	242.8	241.0	237.7	235.3	233.0	232.8	231.6	231.0	228.3
5,0°	261.2	274.7	280.2	280.4	280.2	280.2	280.4	284.7	292.2	294.5	290.2	286.1	279.2	272.0
7,5°	278.1	285.5	296.7	312.2	320.2	325.7	330.8	334.2	337.7	341.6	344.7	337.3	324.0	305.1
10,0°	286.9	306.5	317.5	333.2	348.1	353.0	367.9	377.7	385.5	392.6	387.1	382.2	380.4	370.4
12,5°	287.5	311.6	325.9	341.4	366.3	378.3	389.1	397.1	396.5	401.8	410.4	399.3	380.2	365.9
15,0°	321.0	348.3	375.3	395.9	415.1	436.1	454.0	454.0	437.7	426.9	418.1	405.1	387.3	372.4
17,5°	336.3	373.0	394.9	420.2	442.0	468.7	490.4	492.8	496.7	479.3	459.7	426.5	401.4	377.7
20,0°	342.8	381.8	414.0	451.8	478.1	486.7	499.3	516.5	509.9	502.6	491.2	469.5	449.1	404.0
22,5°	362.2	388.5	420.0	462.8	495.7	515.2	527.7	528.3	523.0	522.2	517.5	523.0	492.8	457.3
25,0°	372.0	427.1	474.6	494.0	505.0	525.0	554.8	571.6	591.8	558.7	552.4	540.3	517.7	472.4
27,5°	423.4	473.2	493.6	496.1	514.0	548.5	576.5	613.0	634.2	640.7	614.4	566.1	555.0	523.2
30,0°	412.4	439.7	479.7	545.0	564.4	577.7	620.1	609.5	622.2	649.5	647.9	601.8	565.4	534.2
32,5°	387.1	449.1	500.6	557.3	582.8	603.4	636.5	654.6	661.1	673.8	686.7	657.7	608.3	579.3
35,0°	361.6	404.6	441.8	492.2	562.0	577.9	638.5	639.3	685.4	719.9	733.4	716.7	669.3	635.8
37,5°	375.7	403.4	418.1	448.7	498.1	547.1	599.9	660.1	690.1	741.8	773.8	772.4	729.7	678.3
40,0°	398.3	408.5	417.9	438.5	462.0	520.8	580.1	662.4	724.4	792.2	768.9	783.8	736.9	693.2
42,5°	425.5	426.5	428.3	445.5	482.8	522.4	558.7	635.0	718.5	747.5	786.8	754.0	716.7	689.7
45,0°	424.2	435.9	437.7	464.6	490.6	521.8	563.4	603.2	697.5	757.7	764.8	741.1	729.5	678.5
47,5°	417.9	426.1	448.5	480.4	508.9	528.3	572.0	596.5	654.4	723.6	744.4	731.3	718.9	674.4
50,0°	418.5	440.6	481.0	489.3	519.5	547.7	586.9	607.3	642.0	679.5	718.5	716.2	687.5	666.5
52,5°	416.3	441.6	490.4	507.7	546.3	576.1	598.9	628.7	649.7	657.1	685.6	686.0	659.5	636.5
55,0°	421.8	451.2	494.0	548.3	605.4	597.9	620.3	641.6	618.7	628.3	641.6	632.4	625.4	597.1
57,5°	400.2	460.2	545.7	614.8	680.9	647.5	630.5	633.2	637.3	604.8	599.9	608.7	567.1	557.5
60,0°	369.8	436.5	548.9	645.4	722.4	732.6	655.0	649.7	637.9	596.9	577.5	576.9	537.1	509.7
62,5°	314.7	412.4	529.7	597.7	724.4	781.7	670.9	678.1	635.6	566.9	557.9	540.1	488.7	442.6
65,0°	282.2	378.3	497.1	539.7	684.4	825.4	717.5	656.9	621.4	547.7	511.0	497.7	439.3	388.1
67,5°	239.2	368.1	483.4	490.6	648.3	835.4	695.6	600.1	585.4	486.1	447.9	449.1	391.4	342.8
70,0°	255.9	379.3	476.9	494.8	561.4	745.4	645.6	559.9	510.8	436.5	401.0	392.2	324.2	291.0
72,5°	275.1	380.6	448.3	489.1	547.9	663.8	568.7	464.8	396.5	364.2	319.4	302.8	259.4	217.5
75,0°	204.5	315.3	388.5	434.2	476.7	543.6	487.3	345.7	283.4	250.4	266.7	273.2	216.7	162.4
77,5°	112.2	180.8	224.7	278.1	266.1	275.5	248.5	199.0	172.8	169.0	193.4	205.1	156.5	116.9
80,0°	47.7	55.1	72.4	96.9	82.0	82.4	99.1	99.8	98.7	98.5	77.7	98.5	86.7	68.4
82,5°	12.2	14.1	15.9	18.4	21.4	23.5	31.6	41.6	37.8	35.7	33.9	40.0	41.6	41.4
85,0°	8.0	8.8	9.8	10.8	11.4	12.0	12.0	12.0	12.0	12.7	14.3	16.5	18.8	21.4
87,5°	3.5	5.3	6.1	6.7	7.1	7.6	7.6	7.3	7.1	6.7	6.5	6.5	6.7	7.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	225.1	222.6	220.2	217.7	213.6	209.4	205.1	201.2	196.3	192.8	190.4	188.6	186.5	184.5
5,0°	261.8	248.1	237.5	230.8	225.1	221.2	214.1	207.7	197.7	189.8	183.4	176.7	172.0	166.9
7,5°	291.4	283.4	268.3	254.7	236.5	225.9	215.3	200.4	188.6	177.5	172.4	160.2	150.8	144.7
10,0°	346.3	318.7	294.3	265.1	247.5	228.3	210.8	195.7	181.0	165.1	157.1	150.6	145.7	141.4
12,5°	357.9	333.8	294.3	277.3	256.7	230.2	216.5	199.4	180.2	166.9	159.8	153.7	142.0	136.9
15,0°	347.5	323.4	302.6	272.0	257.5	241.8	220.8	196.9	178.8	167.7	161.6	150.4	141.8	139.0
17,5°	347.5	317.7	297.7	265.1	251.6	227.7	208.1	190.4	176.5	164.3	156.9	152.8	149.4	144.1
20,0°	367.1	328.7	323.0	282.6	251.6	242.2	212.4	192.0	171.8	163.7	157.5	154.7	154.7	151.4
22,5°	386.3	351.2	328.1	295.7	276.7	253.8	223.2	196.7	176.9	164.5	156.9	155.1	157.7	158.3
25,0°	430.8	386.3	341.0	317.9	305.9	270.6	231.6	194.7	173.2	164.7	157.9	157.1	160.6	165.1
27,5°	475.5	434.2	385.3	368.5	349.8	307.5	237.9	192.4	170.6	158.6	155.9	160.8	165.7	173.0
30,0°	518.7	476.5	411.6	377.3	380.6	291.0	227.9	183.2	164.5	158.8	157.3	164.1	173.2	181.2
32,5°	548.3	502.0	409.1	338.3	337.5	265.3	209.2	177.7	158.3	154.3	159.4	169.6	179.8	191.0
35,0°	594.0	514.6	418.7	327.3	280.8	235.3	187.3	167.9	154.9	154.5	162.4	175.3	189.8	200.0
37,5°	602.4	508.1	427.3	337.1	269.4	214.7	175.9	162.4	153.2	154.1	165.7	181.6	196.9	207.9
40,0°	627.3	540.1	456.3	351.8	274.3	202.4	169.4	158.1	147.5	151.6	167.1	188.3	205.7	218.8
42,5°	625.2	560.3	489.3	373.4	282.2	201.2	168.6	155.7	142.6	149.6	165.5	192.8	209.8	238.3
45,0°	648.9	555.9	494.4	372.4	280.4	206.1	165.7	149.8	138.6	144.7	165.9	191.8	223.0	243.9
47,5°	636.0	546.1	474.6	363.6	272.8	204.7	167.7	144.1	135.7	141.6	162.6	194.7	232.6	260.2
50,0°	596.1	513.8	447.3	340.6	259.2	212.8	169.6	137.9	130.0	136.3	161.8	204.1	251.0	260.4
52,5°	585.6	493.8	403.4	319.1	256.1	207.7	161.0	129.4	121.8	129.2	170.6	224.7	270.6	261.2
55,0°	576.9	485.3	382.6	305.5	266.7	222.0	163.2	124.5	114.7	136.9	177.9	239.6	270.4	266.5
57,5°	528.7	471.8	344.9	309.8	251.0	208.5	150.6	118.2	105.1	123.9	177.3	253.8	276.3	256.1
60,0°	482.8	425.3	340.0	283.8	237.1	199.4	136.5	107.5	93.5	108.2	178.8	259.6	264.7	237.9
62,5°	447.7	386.5	303.0	241.0	205.1	174.7	131.0	99.2	82.0	100.8	169.6	224.5	220.8	206.7
65,0°	376.1	326.1	264.9	208.1	190.2	167.7	152.6	104.1	79.0	104.9	169.2	173.7	144.3	126.5
67,5°	313.2	271.0	221.8	173.2	165.1	178.1	157.1	97.7	74.5	109.4	149.6	136.9	93.9	85.5
70,0°	255.1	226.9	179.4	146.5	155.3	166.1	127.1	83.3	73.9	92.0	116.3	106.1	67.3	73.3
72,5°	190.2	181.6	133.0	116.5	118.6	115.3	83.9	47.5	49.2	64.7	63.9	63.7	47.1	58.6
75,0°	129.2	128.4	107.5	92.6	85.1	67.1	44.3	31.4	29.6	46.1	35.7	38.8	38.4	40.6
77,5°	91.8	89.8	79.2	66.5	58.8	42.6	29.8	25.3	24.3	24.9	29.0	29.0	29.0	26.9
80,0°	64.7	61.4	54.9	43.7	38.0	27.1	21.4	20.6	19.0	19.0	20.6	19.8	18.4	19.4
82,5°	41.6	39.0	34.1	28.4	23.1	17.3	14.5	15.5	16.1	13.3	12.7	13.5	12.9	12.9
85,0°	22.0	20.0	17.8	15.3	11.6	8.8	7.1	8.4	10.0	8.4	7.8	8.2	8.0	8.0
87,5°	7.8	7.8	6.1	4.7	3.9	2.9	2.7	3.3	3.1	3.5	3.7	3.7	3.7	3.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	182.8	181.8	180.8	179.4	176.5	173.5	171.2	169.0	167.9	167.9	168.6	169.2	169.8	169.8
5,0°	161.6	156.7	153.9	150.0	146.7	141.8	138.4	135.1	133.9	133.7	134.5	135.3	136.3	137.9
7,5°	139.8	134.7	131.8	129.4	125.9	121.2	118.8	115.9	113.9	113.5	115.3	117.1	118.8	119.6
10,0°	134.3	129.0	126.9	124.1	120.0	116.5	114.3	112.0	109.4	107.3	107.3	106.7	106.7	107.7
12,5°	132.2	131.0	128.1	127.9	124.7	122.4	119.8	117.5	113.7	110.2	107.5	105.1	101.6	99.0
15,0°	136.1	134.7	134.1	134.5	133.0	131.8	129.2	126.7	121.4	116.7	113.3	108.8	103.9	98.6
17,5°	142.2	142.2	143.0	145.7	145.5	144.9	142.0	138.6	131.8	125.5	120.8	114.5	107.7	100.2
20,0°	150.6	151.4	154.9	158.1	158.8	158.1	155.3	150.6	141.8	134.1	127.5	119.2	110.4	101.2
22,5°	159.4	162.8	168.3	171.8	172.8	171.0	166.9	161.0	150.0	140.8	132.2	121.6	110.6	100.2
25,0°	168.8	174.3	180.8	184.1	183.7	180.8	174.9	167.3	154.7	144.7	134.3	121.8	108.6	97.3
27,5°	180.2	185.9	191.0	192.0	190.2	186.5	180.2	170.4	154.9	142.8	132.0	120.2	103.5	91.0
30,0°	188.8	194.1	197.5	197.1	195.1	191.8	181.6	167.9	151.0	138.6	125.5	110.8	96.1	84.7
32,5°	198.5	202.6	204.7	207.7	201.8	188.6	176.5	163.2	147.3	135.7	125.1	104.5	88.4	79.4
35,0°	206.7	214.7	219.6	206.9	193.7	188.3	177.1	159.4	140.0	126.9	115.9	98.4	81.8	77.5
37,5°	217.5	227.5	211.6	202.2	199.0	181.0	164.3	149.0	133.9	122.2	109.4	89.4	77.1	66.1
40,0°	234.9	223.6	218.1	201.6	183.9	178.3	162.8	144.1	121.4	109.0	97.1	79.8	76.9	60.8
42,5°	235.9	228.7	210.0	199.0	191.4	167.9	150.0	136.7	118.4	103.3	87.7	76.5	68.2	58.2
45,0°	248.1	224.3	215.3	192.6	190.4	173.9	147.1	125.7	107.5	92.0	76.1	67.7	59.2	51.8
47,5°	241.4	231.0	211.4	191.6	175.5	160.2	143.5	110.4	89.4	80.0	65.9	64.7	51.2	48.0
50,0°	249.6	230.2	211.6	191.4	170.6	160.8	124.1	103.7	83.7	70.6	57.1	51.4	42.4	37.1
52,5°	248.3	232.8	197.9	184.3	201.4	155.9	119.0	99.8	73.7	56.9	48.8	43.5	40.6	31.8
55,0°	245.9	221.2	202.4	211.4	207.9	151.4	113.7	86.7	63.9	51.0	44.5	38.6	39.8	34.1
57,5°	251.4	216.7	208.5	242.8	194.7	141.6	100.8	70.0	54.9	44.3	36.1	31.4	33.5	30.0
60,0°	242.6	225.3	226.1	219.2	147.9	130.2	90.6	61.6	43.7	36.9	30.6	29.2	25.7	25.3
62,5°	185.9	216.5	231.6	178.6	123.0	96.9	90.4	51.2	37.8	31.8	25.9	23.7	21.6	22.2
65,0°	162.2	172.8	193.0	177.7	133.0	90.8	78.4	45.9	33.7	27.5	23.5	21.4	20.2	19.6
67,5°	110.6	127.5	127.1	112.6	86.9	63.7	51.2	34.9	29.2	23.5	21.2	20.0	19.2	18.6
70,0°	69.2	79.2	75.3	71.6	50.2	43.1	32.9	27.3	25.1	20.4	19.2	18.6	18.0	17.5
72,5°	55.3	49.8	49.6	34.9	29.6	26.5	25.1	23.1	21.6	17.5	16.7	16.3	15.9	15.7
75,0°	39.2	36.7	29.6	25.3	23.3	21.4	20.8	17.3	15.9	15.1	14.5	14.1	13.9	13.5
77,5°	25.5	23.5	22.9	19.8	18.4	16.9	15.7	13.7	12.7	12.0	11.6	11.4	11.2	11.0
80,0°	18.2	17.1	16.9	14.9	13.9	12.9	11.4	10.6	9.8	9.4	9.0	8.8	8.6	8.6
82,5°	12.7	12.0	11.8	10.8	10.0	9.2	8.6	7.8	7.3	6.9	6.7	6.7	6.5	6.3
85,0°	8.0	7.8	7.3	7.1	6.7	6.3	5.9	5.5	5.1	4.9	4.7	4.7	4.5	4.5
87,5°	3.5	3.5	3.3	3.3	3.1	2.9	2.7	2.7	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	170.6	172.8	175.3	178.3	180.4	180.4	179.6	179.6	178.8	177.9	176.7	177.1	179.6	182.6
5,0°	138.4	140.0	142.8	148.4	156.1	165.1	167.7	168.1	169.0	169.2	170.2	172.4	174.5	176.7
7,5°	120.2	121.2	124.9	125.3	126.3	129.6	140.4	151.8	159.8	168.1	173.0	173.7	174.3	174.7
10,0°	108.8	109.6	112.6	116.9	120.8	122.6	124.9	130.6	147.7	156.3	159.6	165.1	170.2	168.8
12,5°	96.7	99.2	100.4	100.4	102.8	106.7	116.5	120.6	129.4	137.7	141.2	147.7	152.6	157.3
15,0°	92.6	88.2	85.9	85.1	85.9	87.7	90.2	103.3	110.4	119.6	124.9	128.8	139.8	143.2
17,5°	93.5	86.5	80.4	76.7	75.3	75.7	75.7	78.8	88.6	100.6	111.8	121.2	124.9	126.7
20,0°	92.4	84.7	77.7	72.4	69.0	67.7	69.4	72.6	77.5	84.3	94.3	111.0	119.0	118.8
22,5°	90.8	81.0	73.7	68.2	65.3	65.3	65.7	69.0	70.6	79.2	90.2	99.0	112.8	118.6
25,0°	86.9	77.3	69.2	63.7	62.0	62.6	65.3	69.4	71.6	76.1	86.7	97.1	107.1	116.3
27,5°	82.0	73.1	65.1	59.8	57.1	61.2	67.3	70.0	71.8	77.5	88.4	97.3	108.4	117.1
30,0°	78.4	71.8	61.4	57.5	56.9	59.8	66.5	71.0	73.5	77.7	89.6	100.4	107.5	114.3
32,5°	70.8	63.9	59.2	58.2	58.2	59.8	63.5	68.0	72.8	76.3	92.8	103.1	105.9	108.2
35,0°	64.5	58.2	57.5	58.8	60.4	60.4	63.5	63.9	71.6	75.9	86.7	100.8	105.9	104.5
37,5°	56.5	53.7	57.7	63.5	61.4	60.8	62.4	64.5	72.0	78.8	82.4	95.5	100.8	97.9
40,0°	55.3	53.3	58.4	60.8	58.0	58.2	61.8	66.7	73.3	77.3	81.4	90.8	95.9	84.9
42,5°	56.9	64.3	62.4	58.4	57.1	58.8	61.4	65.3	71.6	70.8	78.6	87.3	91.4	79.6
45,0°	52.2	68.4	68.0	58.4	55.7	58.0	59.0	59.6	65.1	65.9	71.0	80.4	82.8	73.3
47,5°	50.0	57.5	68.2	68.4	58.2	48.6	53.1	56.3	58.8	61.4	65.3	74.7	73.9	70.0
50,0°	42.9	48.4	61.0	81.4	66.3	52.4	49.6	52.2	55.1	59.4	58.6	65.7	68.4	63.3
52,5°	34.9	40.6	48.4	66.1	74.9	61.0	47.3	48.4	50.6	53.3	51.4	57.1	58.8	55.5
55,0°	31.2	31.6	40.4	56.3	65.9	71.4	55.1	44.1	45.3	46.5	44.7	52.2	50.6	50.8
57,5°	28.0	29.4	34.7	41.4	49.0	51.8	46.7	40.4	39.2	39.8	39.8	44.1	45.1	46.9
60,0°	26.5	29.2	30.0	32.0	32.4	33.5	35.5	33.9	34.1	34.1	34.7	39.0	40.8	41.0
62,5°	23.9	22.9	23.7	23.3	25.3	25.1	26.5	29.2	28.8	29.2	30.2	34.9	35.1	34.5
65,0°	21.4	19.8	20.2	21.4	20.8	22.2	23.5	24.3	24.3	26.3	26.7	28.4	30.2	30.2
67,5°	22.0	17.8	17.8	18.6	19.2	19.0	21.0	21.2	22.0	22.7	23.5	23.7	25.3	25.3
70,0°	19.8	16.5	15.9	15.9	16.1	16.7	17.5	18.4	19.2	19.6	19.4	20.2	21.0	21.8
72,5°	15.9	14.9	14.3	14.1	14.1	14.5	14.7	15.1	16.1	16.3	16.1	16.3	17.1	18.0
75,0°	13.3	12.9	12.4	12.2	12.2	12.2	12.4	12.4	13.3	13.3	13.1	13.3	13.5	14.1
77,5°	10.8	10.6	10.2	10.0	10.0	10.0	10.0	10.0	10.6	10.6	10.0	10.2	10.4	10.8
80,0°	8.4	8.2	8.0	7.8	7.6	7.6	7.6	7.6	8.0	7.8	7.1	6.7	7.3	8.0
82,5°	6.1	6.1	5.9	5.7	5.7	5.5	5.3	5.3	5.3	5.7	4.5	3.5	4.7	5.5
85,0°	4.5	4.3	4.1	4.1	3.9	3.7	3.5	3.3	3.3	3.1	2.9	2.4	2.9	2.9
87,5°	2.4	2.4	2.4	2.2	2.2	2.2	2.0	1.8	1.6	1.4	1.2	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	184.5	186.5	189.2	192.8	196.3	199.4	201.4	204.5	206.3	209.0	210.8	215.1	219.2	222.0
5,0°	177.5	179.0	179.8	181.4	184.5	190.0	197.3	205.1	213.6	220.8	223.4	227.3	231.8	235.5
7,5°	169.8	173.2	179.8	185.7	188.3	190.0	196.3	211.6	219.0	225.3	230.6	238.1	243.0	249.4
10,0°	170.4	169.8	170.2	171.2	178.3	189.8	198.8	218.1	226.7	227.9	232.4	234.9	241.0	251.4
12,5°	156.1	158.3	158.6	163.7	164.7	170.6	179.8	202.0	206.9	218.1	220.8	226.1	234.1	244.3
15,0°	143.9	146.5	148.8	149.6	149.0	159.6	165.1	184.5	196.9	203.9	209.4	219.2	237.5	262.4
17,5°	129.4	135.7	139.2	141.8	146.9	155.1	172.6	179.6	182.0	191.8	205.9	222.0	241.6	262.4
20,0°	121.4	126.3	134.9	142.4	151.6	161.2	168.8	171.6	176.9	184.9	199.2	213.6	231.2	269.8
22,5°	123.3	131.0	134.3	141.2	149.4	152.6	156.5	156.7	161.4	175.7	190.8	212.2	236.3	267.9
25,0°	124.5	132.4	127.7	132.6	136.1	134.1	138.4	143.7	152.6	165.9	182.8	200.8	224.7	259.8
27,5°	118.4	122.6	119.2	119.4	119.8	123.9	129.6	136.7	145.1	158.8	177.3	203.9	231.8	262.4
30,0°	114.7	112.2	116.9	114.5	111.0	115.9	122.8	130.8	142.8	154.3	172.8	200.6	227.3	260.6
32,5°	106.7	100.8	106.1	105.9	103.1	107.3	115.1	125.3	135.5	150.8	173.7	197.9	229.2	259.8
35,0°	95.5	92.4	97.3	94.3	94.7	98.4	105.5	113.5	127.5	138.8	165.1	195.5	221.0	254.9
37,5°	84.5	84.1	87.1	85.7	85.7	87.9	94.5	105.3	116.9	127.9	150.6	194.3	232.0	262.4
40,0°	77.5	76.9	79.8	78.2	76.3	78.2	84.7	93.9	105.9	116.7	135.3	186.3	226.9	262.6
42,5°	72.6	70.8	71.4	71.2	70.2	71.0	76.3	84.1	96.5	109.8	129.0	168.1	231.8	274.3
45,0°	69.4	66.3	65.3	64.9	64.9	66.1	70.2	76.9	90.0	102.0	121.2	144.1	221.8	288.9
47,5°	67.7	62.0	60.2	60.2	60.0	61.6	65.9	72.6	82.6	97.3	112.0	127.5	203.9	287.3
50,0°	61.8	56.9	55.3	54.5	55.3	57.1	61.4	66.3	76.1	89.4	100.2	114.5	180.6	268.9
52,5°	56.9	51.8	50.2	49.4	50.0	52.4	56.1	60.8	67.5	79.0	89.6	101.0	144.5	255.7
55,0°	49.4	46.9	45.3	44.7	45.3	47.7	51.0	54.5	59.6	68.2	77.3	88.4	111.8	237.3
57,5°	43.7	41.6	40.6	40.4	40.8	43.3	45.9	48.8	51.8	57.3	64.9	74.5	108.2	196.1
60,0°	38.6	36.9	36.3	36.1	36.7	38.4	40.6	42.4	45.3	48.4	56.1	64.1	89.0	136.9
62,5°	33.3	32.4	32.0	32.2	32.6	34.1	35.7	37.1	40.0	41.4	47.1	54.5	70.6	106.5
65,0°	29.0	28.6	28.2	28.6	29.2	30.0	31.2	32.4	33.3	34.7	40.2	50.2	64.9	86.1
67,5°	24.9	24.5	24.3	24.5	25.9	26.3	27.3	28.0	28.6	29.4	33.5	43.7	62.9	81.0
70,0°	21.2	21.0	20.8	21.0	22.4	22.9	23.3	23.7	24.1	24.7	27.8	34.7	52.4	72.2
72,5°	17.3	17.3	17.5	18.2	19.2	19.8	19.6	19.4	19.8	20.2	23.3	28.2	37.5	61.8
75,0°	14.1	14.3	14.7	15.1	16.3	16.5	15.9	15.5	15.7	16.5	17.8	22.9	25.3	48.4
77,5°	11.2	11.2	11.4	12.0	13.3	13.3	12.9	12.0	12.0	12.7	13.3	16.7	20.0	33.3
80,0°	8.4	8.4	8.6	9.2	9.8	10.0	9.4	8.8	8.8	9.2	9.6	10.4	15.9	21.6
82,5°	5.7	5.5	5.7	6.3	6.7	6.3	6.1	5.9	5.9	6.3	6.5	6.9	7.6	8.4
85,0°	2.7	3.3	3.3	3.3	3.3	3.3	3.3	3.5	3.5	3.7	3.9	4.3	4.7	5.1
87,5°	1.0	1.2	1.2	1.4	1.4	1.4	1.6	1.6	1.6	1.8	2.0	2.2	2.7	3.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd/lumen flux in lm/klm				
0,0°	200.4	200.4	0.3	0.3
2,5°	224.3	227.3	2.4	2.7
5,0°	241.6	251.2	4.8	7.5
7,5°	260.4	269.8	7.3	14.8
10,0°	263.6	273.8	9.9	24.7
12,5°	258.5	272.0	12.2	36.9
15,0°	281.2	295.7	14.9	51.8
17,5°	277.9	298.3	17.6	69.4
20,0°	299.6	312.6	20.6	90.0
22,5°	287.5	323.2	23.7	113.6
25,0°	300.6	328.3	27.0	140.6
27,5°	306.3	358.5	30.9	171.5
30,0°	304.0	357.3	33.9	205.4
32,5°	309.4	353.6	36.8	242.2
35,0°	303.6	339.8	38.9	281.1
37,5°	333.4	361.2	41.1	322.3
40,0°	346.7	366.5	43.3	365.6
42,5°	343.8	386.5	45.3	410.9
45,0°	333.6	405.9	46.9	457.9
47,5°	339.1	405.9	47.9	505.7
50,0°	336.7	398.9	48.6	554.3
52,5°	318.1	401.2	49.2	603.5
55,0°	303.2	390.0	49.8	653.4
57,5°	257.5	352.8	49.8	703.1
60,0°	219.0	302.4	48.9	752.0
62,5°	177.1	244.1	46.3	798.4
65,0°	140.0	193.2	43.5	841.8
67,5°	108.4	159.0	39.4	881.2
70,0°	93.5	158.6	35.2	916.3
72,5°	86.1	162.2	29.9	946.3
75,0°	57.7	90.0	23.8	970.0
77,5°	41.6	64.3	15.3	985.4
80,0°	24.1	29.0	7.8	993.2
82,5°	9.6	11.0	3.8	997.0
85,0°	5.9	6.7	2.0	999.1
87,5°	3.5	4.1	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	12740	124.7	132.2	128.4
95	241	252	12088	117.0	124.0	120.5
90	229	250	11486	110.0	116.6	113.3
85	216	248	10834	102.7	108.8	105.8
80	203	246	10182	95.6	101.3	98.4
75	190	243	9530	88.7	93.9	91.3
70	178	241	8928	82.4	87.3	84.8
65	165	238	8276	75.8	80.2	78.0
60	152	235	7624	69.3	73.3	71.3
55	140	232	7022	63.4	67.1	65.2
50	127	229	6370	57.1	60.4	58.8
45	114	225	5718	50.9	53.9	52.4
40	102	221	5116	45.3	47.9	46.6
35	89	216	4464	39.3	41.6	40.4
30	76	210	3812	33.5	35.4	34.4
25	63	203	3160	27.8	29.3	28.6
20	51	195	2558	22.6	23.8	23.2
15	38	184	1906	17.1	18.0	17.6
13	33	179	1655	15.1	15.8	15.4