

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TL12DV4DXGD
EAN: 4069025156679

LP number
59101_299



Version cover frosted, wide distribution, high visual comfort

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Setting DC mode (central or group accumulator) initial emergency light level

Rated values Net luminous flux = 1950 lm
Power consumption = 11.2 W
Luminous efficacy = 174.1 lm/W

serial
documentation
10.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 671 cd/klm

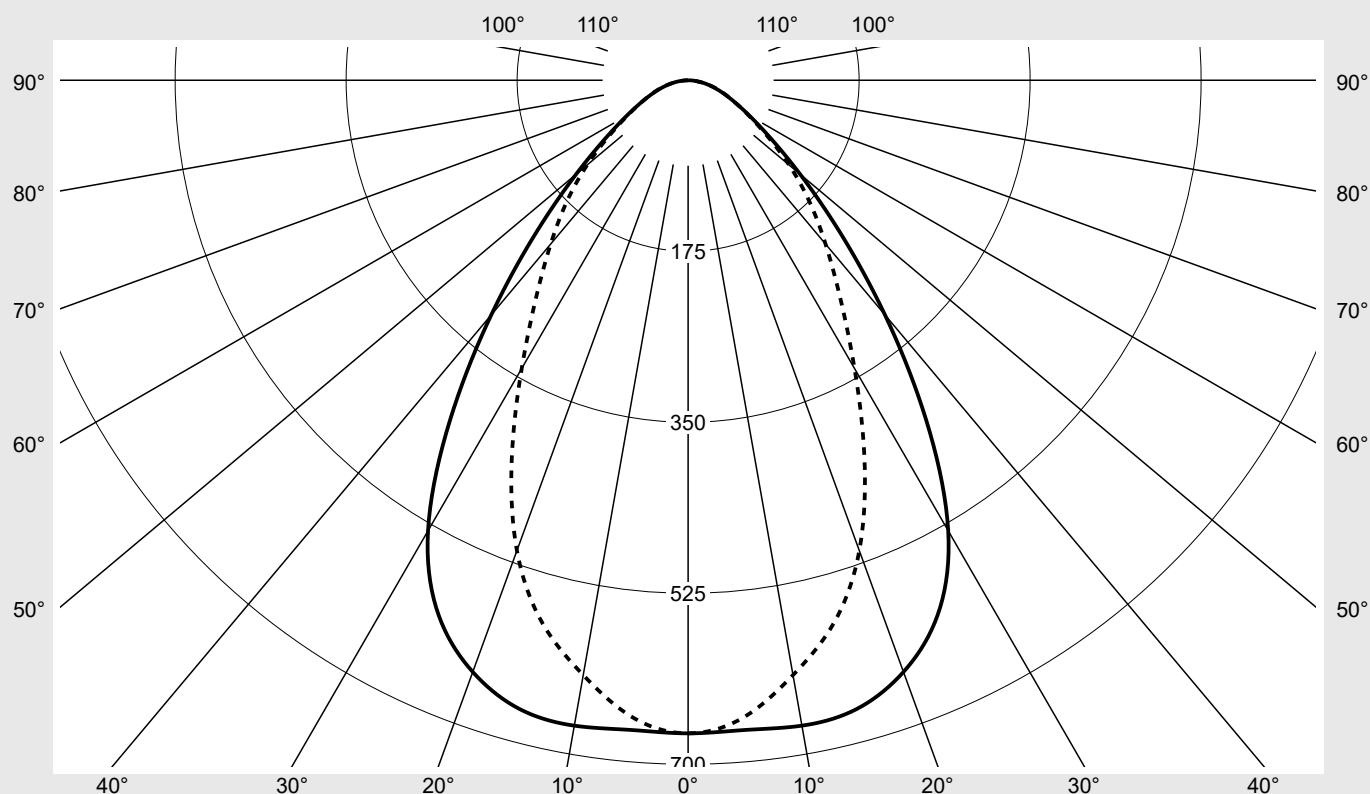

Classifications

DIN 5040 A 6 0
CIE N1=72 N2=92 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL12DV4DXGD EAN: 4069025156679	LP number 59101_299
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	668.4	668.4	668.4	668.4	668.4	668.4	668.4	4.0	4.0
5°	667.5	664.4	657.4	655.8	655.7	654.2	654.4	31.4	35.4
10°	670.7	665.0	649.1	636.1	625.3	618.7	618.1	60.9	96.3
15°	666.2	657.2	632.9	612.0	594.0	578.5	575.5	87.4	183.7
20°	644.4	632.9	606.9	585.4	554.6	522.7	512.3	108.8	292.5
25°	604.1	590.6	566.7	541.2	494.5	444.9	427.0	121.8	414.2
30°	532.4	517.7	496.3	466.1	413.9	359.9	340.6	122.9	537.1
35°	425.0	409.7	387.0	361.9	325.4	286.0	271.1	111.0	648.1
40°	313.4	295.8	270.7	255.1	246.8	229.4	218.8	91.8	739.9
45°	219.2	200.3	175.7	171.1	181.8	184.7	175.5	71.8	811.7
50°	149.7	132.6	112.6	116.3	133.0	145.6	134.9	54.8	866.5
55°	102.7	89.1	74.7	81.5	98.1	107.9	98.1	41.3	907.7
60°	72.4	62.1	51.3	58.3	71.8	76.5	71.0	31.0	938.7
65°	52.1	44.3	35.9	41.6	51.4	54.2	52.1	23.1	961.9
70°	37.6	31.7	24.7	29.1	35.6	38.4	38.3	16.9	978.8
75°	26.0	21.3	16.2	19.0	22.9	25.9	26.8	11.6	990.4
80°	16.1	12.5	9.2	10.4	12.6	14.8	15.7	6.8	997.3
85°	7.0	5.4	3.8	4.1	4.8	5.7	5.8	2.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed		Order number: 52TL12DV4DXGD EAN: 4069025156679							LP number 59101_299	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	14.7	16.1	15.0	16.4	16.7	14.6	16.0	15.0	16.3
	3H	15.2	16.5	15.6	16.8	17.2	15.4	16.6	15.8	17.0
	4H	15.5	16.7	15.9	17.1	17.4	15.7	16.9	16.1	17.2
	6H	15.8	16.8	16.2	17.2	17.6	16.0	17.1	16.4	17.4
	8H	16.0	16.9	16.4	17.3	17.7	16.1	17.1	16.5	17.5
	12H	16.0	16.9	16.5	17.3	17.7	16.2	17.1	16.6	17.5
4H	2H	14.8	16.0	15.2	16.4	16.7	14.8	16.0	15.2	16.3
	3H	15.5	16.5	15.9	16.9	17.3	15.8	16.7	16.2	17.1
	4H	15.8	16.7	16.3	17.1	17.6	16.2	17.1	16.6	17.5
	6H	16.2	16.9	16.6	17.3	17.8	16.5	17.3	17.0	17.7
	8H	16.3	17.0	16.8	17.4	17.9	16.7	17.4	17.2	17.8
	12H	16.4	17.0	16.9	17.5	18.0	16.8	17.4	17.3	17.8
8H	4H	15.9	16.6	16.4	17.0	17.5	16.3	16.9	16.7	17.4
	6H	16.3	16.8	16.8	17.3	17.8	16.7	17.2	17.2	17.7
	8H	16.4	16.9	16.9	17.4	17.9	16.8	17.3	17.3	17.8
	12H	16.6	17.0	17.1	17.5	18.0	17.0	17.4	17.5	17.9
12H	4H	15.9	16.5	16.4	17.0	17.5	16.3	16.8	16.8	17.3
	6H	16.3	16.8	16.8	17.2	17.8	16.7	17.2	17.2	17.6
	8H	16.5	16.9	17.0	17.4	17.9	16.9	17.3	17.4	17.8

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 2250 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	4632.5	4233.7	3712.3	3616.4	3841.8	3903.1	3709.2
50°	3479.6	3081.9	2617.8	2703.7	3091.7	3385.1	3134.9
55°	2674.6	2321.9	1946.5	2123.8	2555.1	2812.2	2554.5
60°	2163.1	1856.8	1533.3	1743.6	2144.8	2286.5	2121.2
65°	1842.2	1567.9	1271.0	1471.7	1819.0	1914.8	1840.4
70°	1641.6	1384.2	1079.3	1269.3	1553.8	1677.7	1673.5
75°	1501.0	1229.6	937.2	1095.7	1322.7	1493.0	1546.8
80°	1384.5	1079.3	794.1	898.8	1086.6	1277.8	1354.6
85°	1200.6	924.8	653.0	704.1	827.7	969.4	1000.9

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL12DV4DXGD EAN: 4069025156679	LP number 59101_299
--	---	--------------------------------------

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

