

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TE12DN4AXG3S4
EAN: 4058352907887

LP number
59101_315



Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting AC-mode
Rated values Net luminous flux = 10280 lm
 Power consumption = 61.8 W
 Luminous efficacy = 166.3 lm/W

serial
documentation
17.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 671 cd/klm

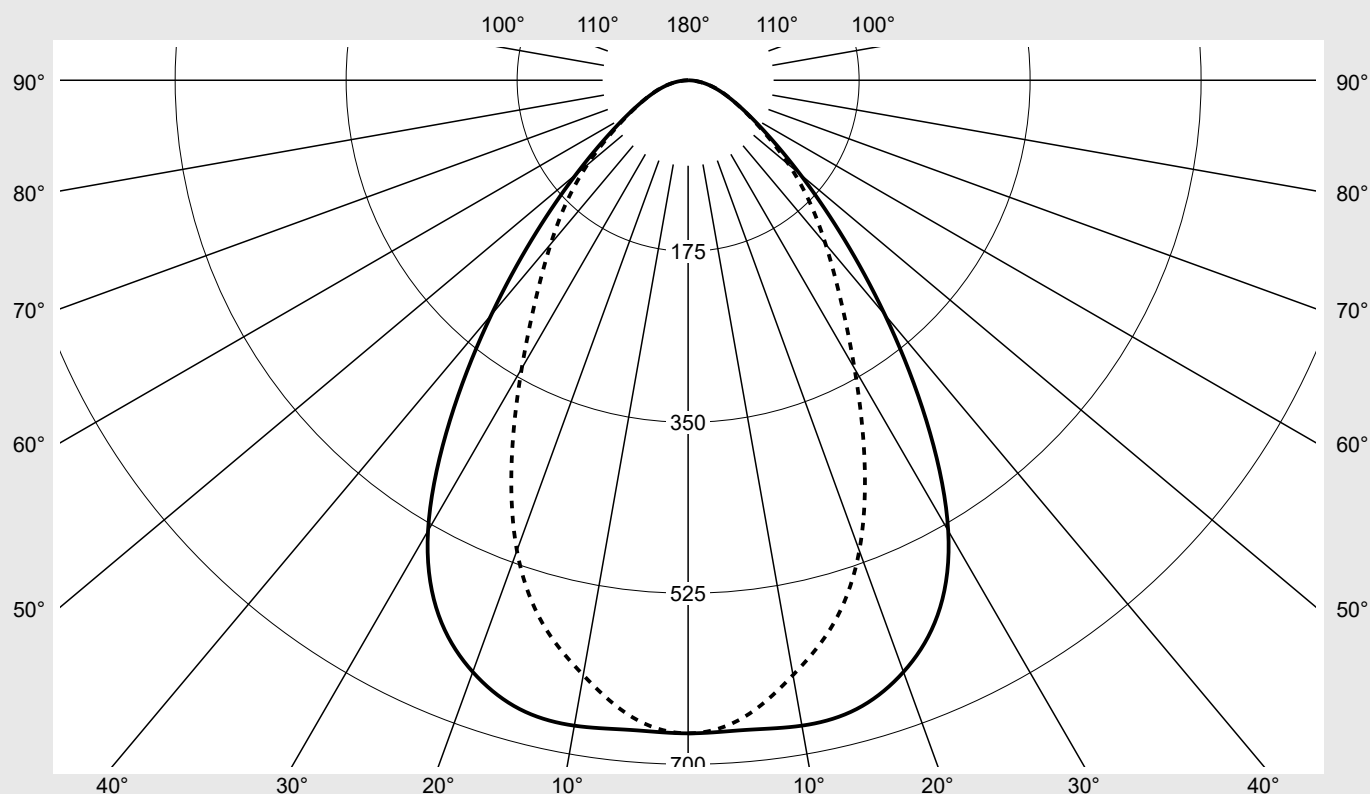

Classifications

DIN 5040 A 6 0
 CIE N1=72 N2=92 N3=99
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4AXG3S4 EAN: 4058352907887	LP number 59101_315
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	668.4	668.4	668.4	668.4	668.4	668.4	668.4	4.0	4.0
5°	667.5	664.4	657.4	655.8	655.7	654.2	654.4	31.4	35.4
10°	670.7	665.0	649.1	636.1	625.3	618.7	618.1	60.9	96.3
15°	666.2	657.2	632.9	612.0	594.0	578.5	575.5	87.4	183.7
20°	644.4	632.9	606.9	585.4	554.6	522.7	512.3	108.8	292.5
25°	604.1	590.6	566.7	541.2	494.5	444.9	427.0	121.8	414.2
30°	532.4	517.7	496.3	466.1	413.9	359.9	340.6	122.9	537.1
35°	425.0	409.7	387.0	361.9	325.4	286.0	271.1	111.0	648.1
40°	313.4	295.8	270.7	255.1	246.8	229.4	218.8	91.8	739.9
45°	219.2	200.3	175.7	171.1	181.8	184.7	175.5	71.8	811.7
50°	149.7	132.6	112.6	116.3	133.0	145.6	134.9	54.8	866.5
55°	102.7	89.1	74.7	81.5	98.1	107.9	98.1	41.3	907.7
60°	72.4	62.1	51.3	58.3	71.8	76.5	71.0	31.0	938.7
65°	52.1	44.3	35.9	41.6	51.4	54.2	52.1	23.1	961.9
70°	37.6	31.7	24.7	29.1	35.6	38.4	38.3	16.9	978.8
75°	26.0	21.3	16.2	19.0	22.9	25.9	26.8	11.6	990.4
80°	16.1	12.5	9.2	10.4	12.6	14.8	15.7	6.8	997.3
85°	7.0	5.4	3.8	4.1	4.8	5.7	5.8	2.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed		Order number: 52TE12DN4AXG3S4 EAN: 4058352907887							LP number 59101_315	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
2H	x									
	y									
	2H	21.8	23.3	22.2	23.6	23.9	21.8	23.2	22.1	23.5
	3H	22.4	23.7	22.8	24.0	24.4	22.6	23.8	22.9	24.2
	4H	22.7	23.9	23.1	24.2	24.6	22.9	24.1	23.3	24.4
	6H	23.0	24.0	23.4	24.4	24.8	23.2	24.2	23.6	24.6
4H	8H	23.1	24.1	23.6	24.5	24.9	23.3	24.3	23.7	24.7
	12H	23.2	24.1	23.6	24.5	24.9	23.3	24.2	23.8	24.6
	2H	22.0	23.2	22.4	23.5	23.9	22.0	23.2	22.4	23.5
	3H	22.7	23.7	23.1	24.0	24.5	22.9	23.9	23.4	24.3
	4H	23.0	23.9	23.5	24.3	24.7	23.4	24.3	23.8	24.7
	6H	23.3	24.1	23.8	24.5	25.0	23.7	24.5	24.2	24.9
8H	8H	23.5	24.2	24.0	24.6	25.1	23.9	24.5	24.3	25.0
	12H	23.6	24.2	24.1	24.6	25.1	24.0	24.5	24.4	25.0
	4H	23.1	23.8	23.6	24.2	24.7	23.4	24.1	23.9	24.6
	6H	23.5	24.0	23.9	24.5	25.0	23.9	24.4	24.4	24.9
	8H	23.6	24.1	24.1	24.6	25.1	24.0	24.5	24.5	25.0
	12H	23.8	24.2	24.3	24.7	25.2	24.2	24.6	24.7	25.1
12H	4H	23.1	23.7	23.6	24.2	24.7	23.5	24.0	23.9	24.5
	6H	23.5	23.9	24.0	24.4	25.0	23.9	24.3	24.4	24.8
	8H	23.6	24.0	24.2	24.5	25.1	24.1	24.5	24.6	25.0
	2H	21.8	23.3	22.2	23.6	23.9	21.8	23.2	22.1	23.5
	3H	22.4	23.7	22.8	24.0	24.4	22.6	23.8	22.9	24.2
	4H	22.7	23.9	23.1	24.2	24.6	22.9	24.1	23.3	24.4

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°
			Luminance in cd/m²				
45°	50°	55°	60°	65°	70°	75°	80°
65°	70°	75°	80°	85°			

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TE12DN4AXG3S4
EAN: 4058352907887

LP number
59101_315

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

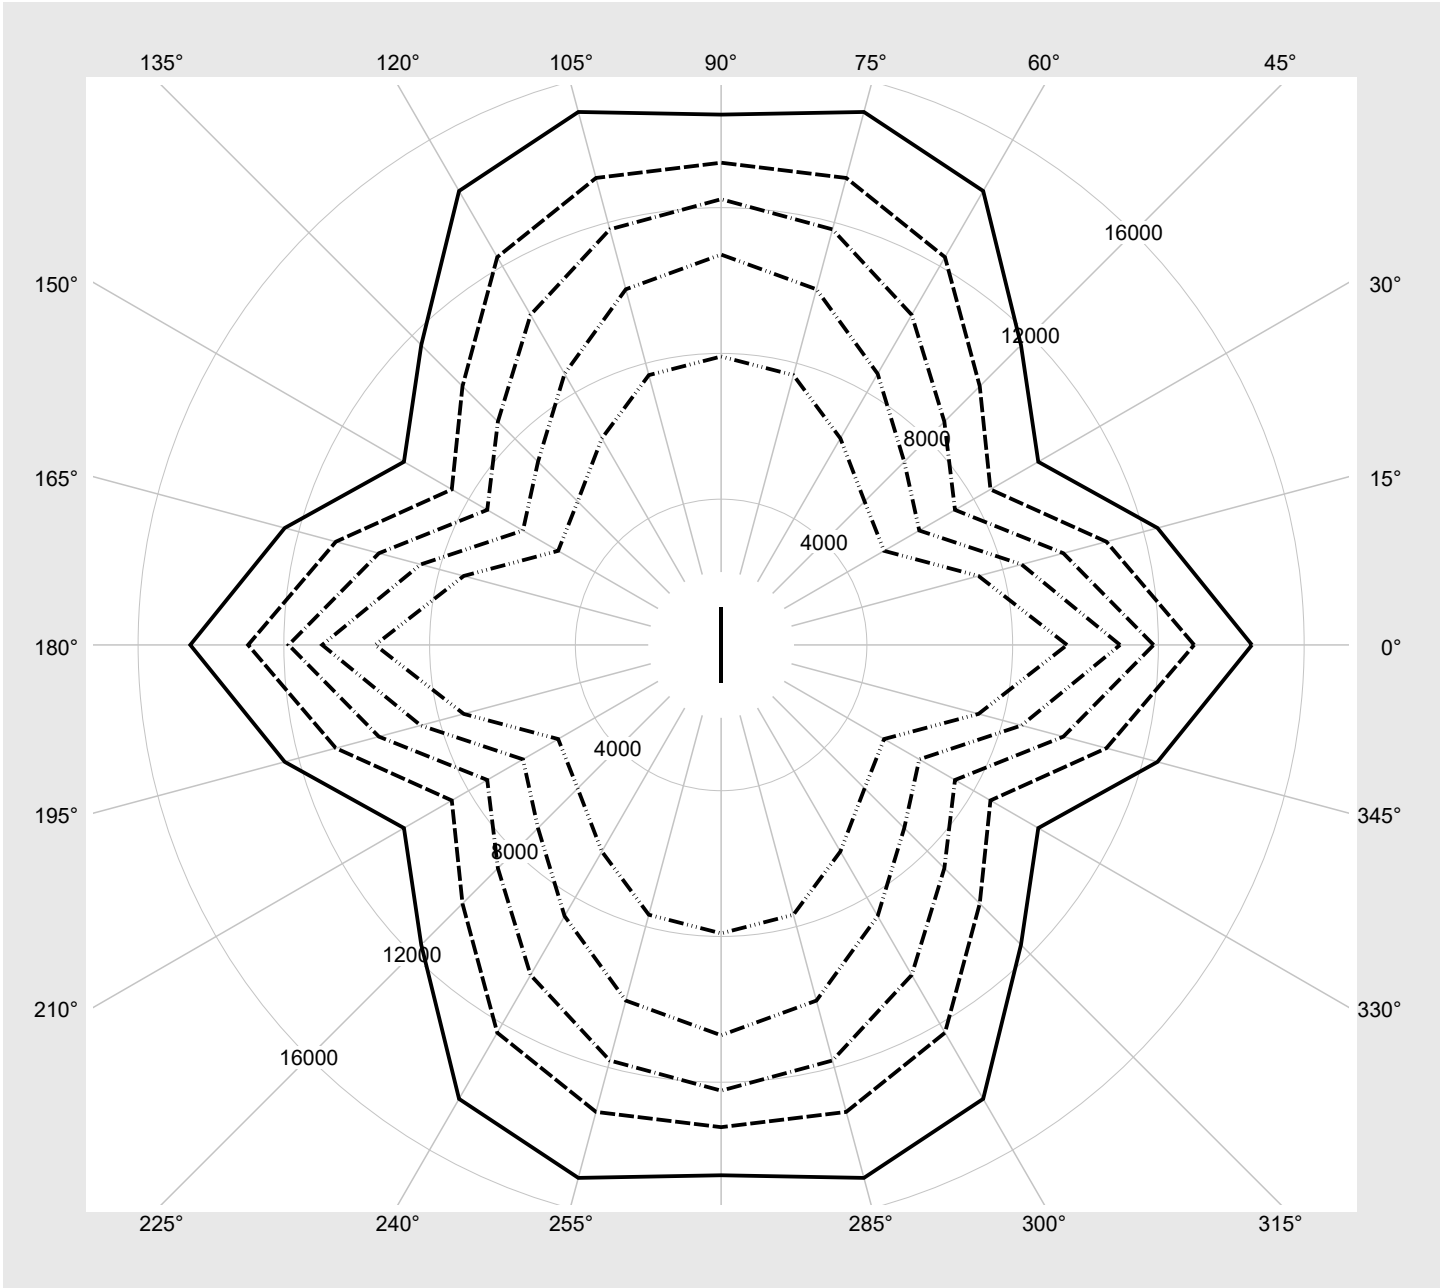

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4AXG3S4 EAN: 4058352907887	LP number 59101_315
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	10280	61.8
95	240	252	9762	58.6
90	226	250	9239	55.3
85	213	248	8746	52.5
80	199	245	8210	49.3
75	186	243	7706	46.4
70	173	240	7198	43.4
65	160	237	6687	40.6
60	147	234	6170	37.7
55	134	231	5647	34.8
50	122	227	5159	32.2
45	109	223	4627	29.3
40	97	219	4132	26.7
35	84	213	3591	23.9
30	72	208	3086	21.3
25	60	201	2577	18.8
20	48	193	2065	16.1
15	36	182	1550	13.5
10	24	168	1031	11.0
5	12	142	509	8.4
2	4	102	158	6.8