

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TL11CN4C5S
EAN: 4058352890424

LP number
58784_263



Version cover frosted, narrow distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-Multilumen CLOi
Rated values Net luminous flux = 12640 lm
 Power consumption = 68.4 W
 Luminous efficacy = 184.8 lm/W

serial
documentation
17.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 3431 cd/klm

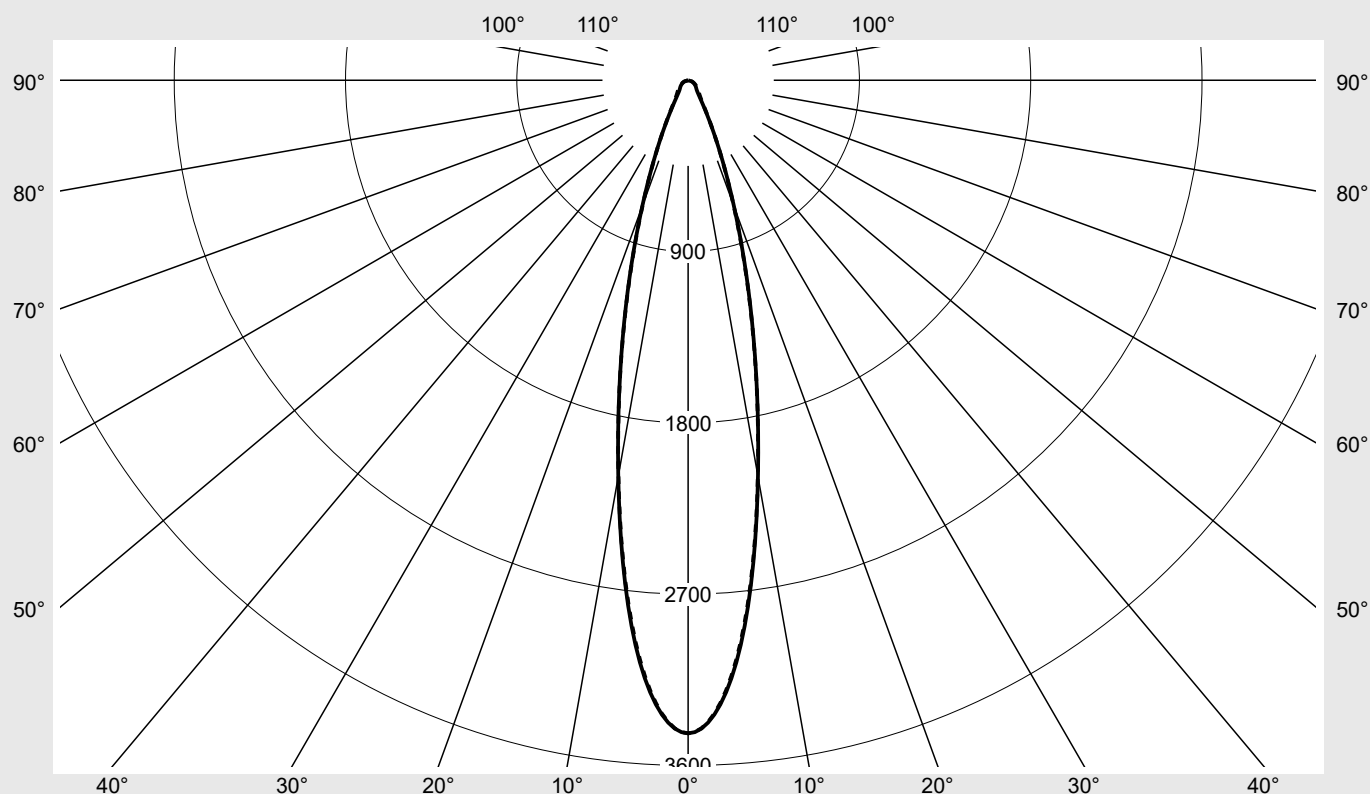

Classifications

DIN 5040 A 7 0
 CIE N1=87 N2=95 N3=99
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL11CN4C5S EAN: 4058352890424	LP number 58784_263
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	3431.3	3431.3	3431.3	3431.3	3431.3	3431.3	3431.3	20.5	20.5
5°	3030.0	3009.9	2995.2	3008.4	3015.8	3015.7	3017.5	143.9	164.4
10°	2113.5	2098.5	2092.1	2104.8	2111.9	2109.7	2109.2	200.3	364.7
15°	1287.2	1281.7	1283.9	1294.7	1294.7	1286.2	1283.2	182.7	547.4
20°	703.4	705.4	717.6	726.5	719.3	702.5	697.3	133.5	680.9
25°	354.0	358.8	370.9	376.0	367.5	355.6	354.0	84.3	765.2
30°	176.2	179.2	185.6	185.7	179.6	178.8	183.6	49.7	814.9
35°	102.4	102.6	103.9	102.5	99.6	107.7	116.7	32.8	847.7
40°	73.1	72.4	71.7	70.6	70.7	80.9	90.2	26.3	874.0
45°	60.7	58.7	57.0	56.9	57.9	66.7	75.5	23.6	897.6
50°	52.7	51.5	51.2	50.6	50.0	56.0	63.2	22.2	919.8
55°	44.8	43.4	45.4	45.0	43.0	46.3	51.7	20.3	940.1
60°	37.3	36.1	38.2	39.8	37.2	38.0	41.8	18.1	958.2
65°	29.8	28.9	31.0	34.0	31.7	30.7	33.0	15.5	973.8
70°	21.9	21.7	22.9	26.9	25.3	23.3	24.3	12.3	986.1
75°	12.2	12.7	14.5	18.5	17.7	15.7	16.0	8.2	994.3
80°	5.5	5.6	6.4	9.0	10.0	8.8	8.6	4.2	998.5
85°	2.2	2.1	2.4	3.2	3.5	3.4	3.0	1.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed			Order number: 52TL11CN4C5S EAN: 4058352890424							LP number 58784_263	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.8	18.0	17.2	18.3	18.6	17.2	18.3	17.6	18.6	19.0
	3H	18.2	19.1	18.6	19.5	19.8	18.6	19.6	19.0	19.9	20.3
	4H	18.5	19.5	18.9	19.8	20.2	19.1	20.0	19.5	20.4	20.8
	6H	18.7	19.5	19.1	19.9	20.3	19.5	20.3	19.9	20.6	21.0
	8H	18.8	19.5	19.2	19.9	20.3	19.6	20.3	20.1	20.7	21.1
	12H	18.8	19.4	19.2	19.8	20.3	19.6	20.3	20.1	20.7	21.1
4H	2H	17.6	18.5	18.0	18.8	19.2	17.9	18.8	18.3	19.1	19.5
	3H	19.0	19.8	19.5	20.2	20.6	19.5	20.2	19.9	20.6	21.0
	4H	19.5	20.2	19.9	20.6	21.0	20.1	20.7	20.5	21.2	21.6
	6H	19.7	20.3	20.1	20.7	21.2	20.5	21.1	20.9	21.5	22.0
	8H	19.7	20.2	20.2	20.7	21.2	20.6	21.1	21.1	21.6	22.0
	12H	19.7	20.2	20.2	20.6	21.1	20.7	21.1	21.1	21.6	22.1
8H	4H	19.8	20.3	20.3	20.8	21.3	20.3	20.9	20.8	21.3	21.8
	6H	20.1	20.5	20.6	21.0	21.5	20.9	21.3	21.4	21.8	22.3
	8H	20.1	20.5	20.6	21.0	21.5	21.0	21.4	21.5	21.9	22.4
	12H	20.1	20.4	20.6	20.9	21.5	21.1	21.4	21.6	21.9	22.5
12H	4H	19.8	20.3	20.3	20.7	21.2	20.3	20.8	20.8	21.2	21.7
	6H	20.1	20.4	20.6	20.9	21.5	20.9	21.2	21.4	21.7	22.2
	8H	20.1	20.5	20.7	21.0	21.5	21.0	21.4	21.6	21.9	22.4

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	12475.0	12065.7	11718.6	11687.4	11895.5	13699.5	15520.8
50°	11922.0	11646.5	11583.0	11443.1	11294.1	12660.5	14288.1
55°	11359.0	11003.6	11506.9	11403.6	10897.5	11738.0	13090.3
60°	10837.6	10483.6	11090.1	11559.6	10819.3	11042.1	12157.4
65°	10238.8	9946.9	10654.4	11673.0	10912.9	10565.0	11341.6
70°	9289.3	9209.9	9722.6	11408.2	10748.1	9896.8	10338.2
75°	6869.8	7117.9	8118.8	10364.7	9921.3	8787.9	8962.5
80°	4636.0	4678.7	5380.7	7551.8	8331.6	7331.8	7196.3
85°	3647.4	3577.4	3949.1	5286.0	5792.8	5622.7	4959.3

Photometric test report

Family
Licross® 21 Recessed

Order number: **52TL11CN4C5S**
EAN: **4058352890424**

LP number
58784_263

Luminance values in cd/m²

γ 65°

γ 70°


γ 75°

γ 80°

γ 85°

sit

eco

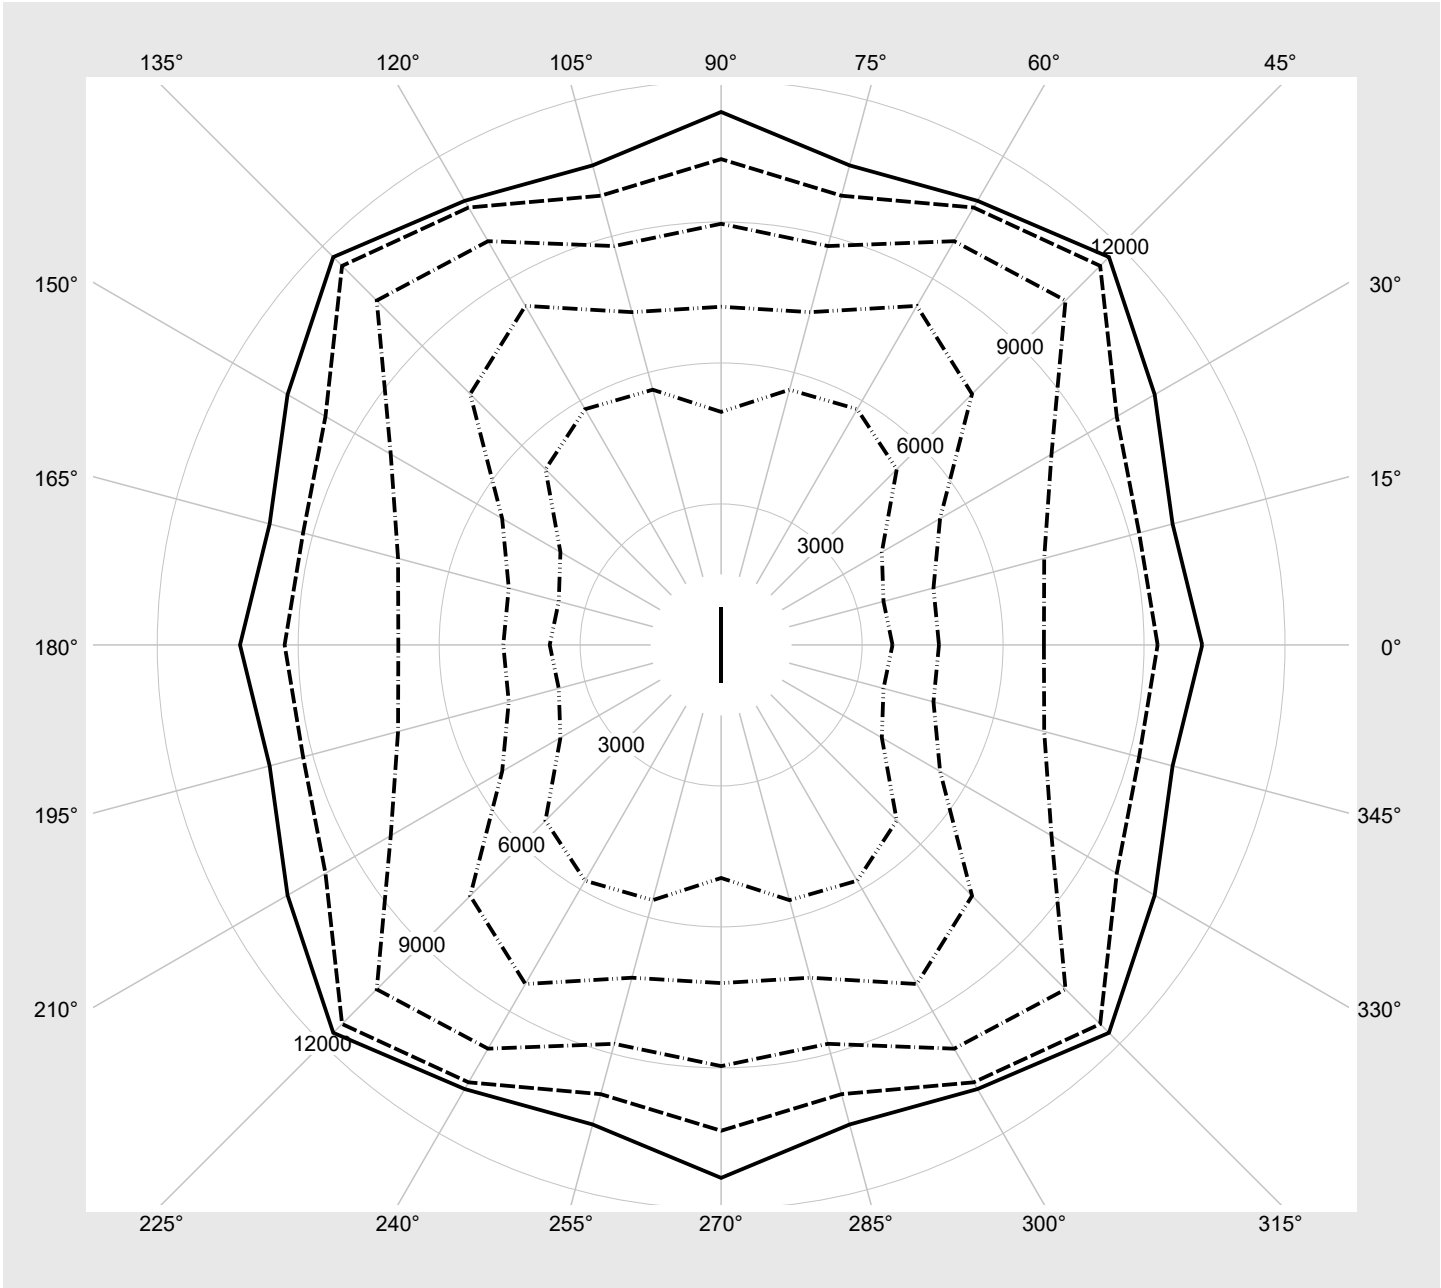

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL11CN4C5S EAN: 4058352890424	LP number 58784_263
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	12640	68.4	83.1	75.8
2	A	C	F	12130	65.4	79.7	72.6
3	A	D	E	11100	59.4	71.9	65.6
4	A	D	F	10120	53.9	64.9	59.4
5	B	C	E	9060	47.9	57.7	52.8
6	B	C	F	8060	42.4	50.9	46.6
7	B	D	E	7050	37.1	44.2	40.7
8	B	D	F	6020	31.6	37.5	34.6