

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TL11DN4AXG3S4
EAN: 4069025202932

LP number
58785_312



Version cover frosted, narrow distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting emergency light operation: 3 h
Rated values Net luminous flux = 930 lm
 Power consumption = 6.7 W
 Luminous efficacy = 138.8 lm/W

serial
documentation
17.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 2627 cd/klm

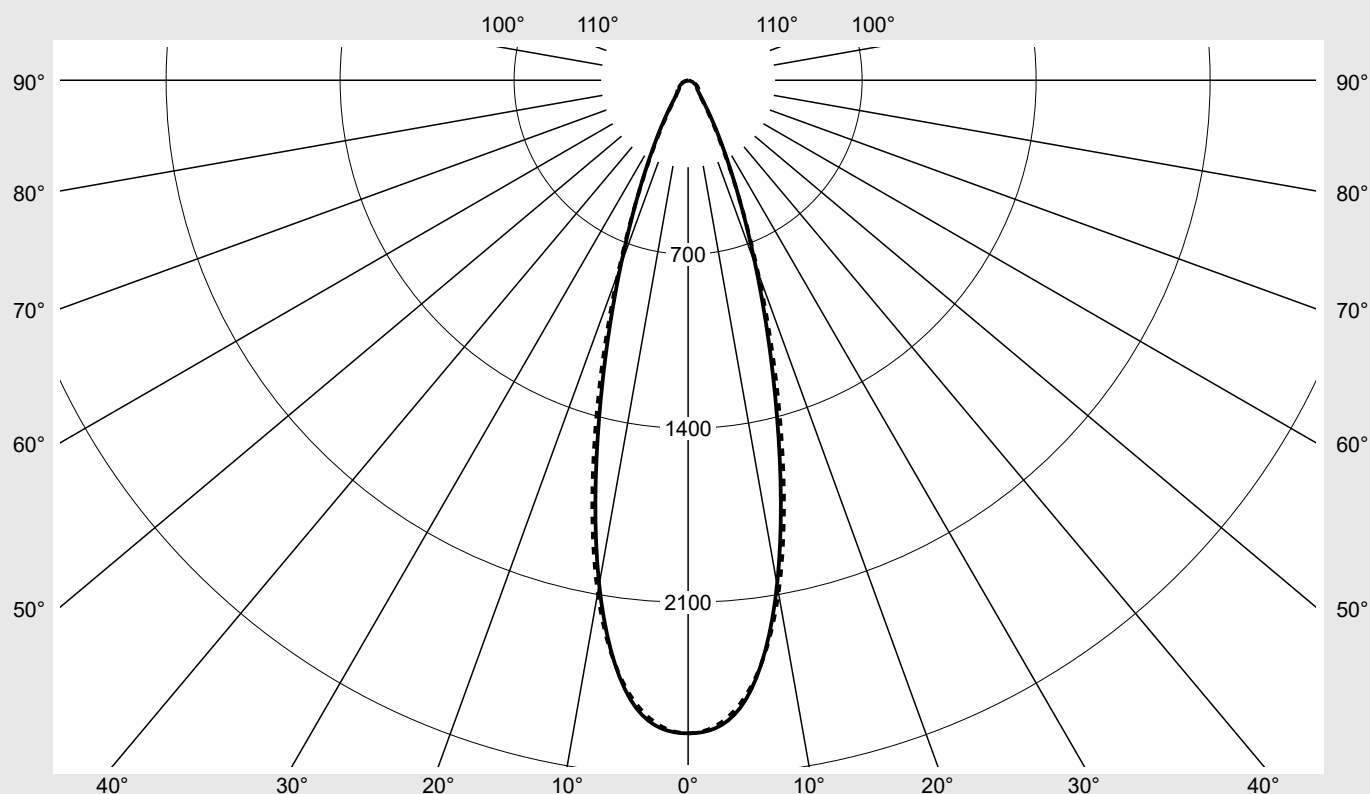

Classifications

DIN 5040 A 7 0
 CIE N1=89 N2=96 N3=99
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL11DN4AXG3S4 EAN: 4069025202932	LP number 58785_312
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	15.7	15.7
5°	2520.2	2503.8	2487.8	2499.1	2508.6	2505.8	2505.2	119.6	135.3
10°	2060.7	2047.7	2044.6	2066.8	2086.2	2092.0	2094.5	196.9	332.2
15°	1373.4	1369.0	1375.7	1399.2	1421.9	1432.7	1437.2	198.7	530.9
20°	791.8	790.8	796.4	808.8	818.0	819.0	819.4	151.2	682.1
25°	418.1	420.5	425.4	427.2	423.4	413.4	409.3	97.4	779.6
30°	215.7	218.7	224.8	222.9	213.7	202.3	197.8	58.9	838.4
35°	112.4	114.3	119.3	116.0	107.4	103.1	102.4	35.0	873.4
40°	70.3	69.7	69.6	67.8	65.2	68.3	71.3	24.2	897.6
45°	52.4	50.5	46.9	47.4	48.4	54.1	61.4	19.6	917.2
50°	46.4	44.6	38.1	38.0	38.3	44.7	54.3	17.8	935.0
55°	42.3	42.2	36.7	33.4	32.3	38.6	47.1	17.1	952.1
60°	32.7	32.9	34.3	30.2	28.0	32.6	38.2	15.3	967.4
65°	23.6	23.8	26.4	25.7	24.0	26.1	29.3	12.6	980.0
70°	15.1	15.6	18.2	19.4	18.6	19.5	20.9	9.4	989.4
75°	8.3	8.7	10.8	13.0	12.9	13.2	13.7	6.1	995.5
80°	4.0	4.1	5.0	6.6	7.3	7.2	7.2	3.2	998.7
85°	1.6	1.6	1.9	2.5	2.6	2.7	2.5	1.2	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL11DN4AXG3S4 EAN: 4069025202932	LP number 58785_312
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	7.1	8.2	7.5	8.5	8.8	7.0	8.1	7.4	8.5	8.8
	3H	8.0	9.0	8.4	9.3	9.7	8.4	9.4	8.8	9.7	10.1
	4H	8.3	9.1	8.7	9.5	9.9	9.0	9.9	9.4	10.2	10.6
	6H	8.4	9.1	8.8	9.5	9.9	9.3	10.1	9.7	10.5	10.9
	8H	8.5	9.1	8.9	9.5	9.9	9.5	10.1	9.9	10.5	10.9
	12H	8.5	9.0	8.9	9.4	9.9	9.5	10.1	9.9	10.5	10.9
4H	2H	7.6	8.5	8.0	8.9	9.2	7.5	8.4	7.9	8.8	9.2
	3H	8.7	9.5	9.2	9.9	10.3	9.1	9.8	9.5	10.2	10.6
	4H	9.0	9.7	9.5	10.1	10.5	9.7	10.4	10.1	10.8	11.2
	6H	9.2	9.7	9.6	10.2	10.6	10.1	10.7	10.6	11.1	11.6
	8H	9.2	9.7	9.7	10.1	10.6	10.2	10.7	10.7	11.2	11.7
	12H	9.2	9.6	9.7	10.1	10.6	10.3	10.7	10.8	11.2	11.7
8H	4H	9.3	9.8	9.8	10.2	10.7	9.9	10.4	10.4	10.8	11.3
	6H	9.4	9.8	9.9	10.3	10.8	10.4	10.8	10.9	11.3	11.8
	8H	9.5	9.8	10.0	10.3	10.8	10.5	10.9	11.0	11.4	11.9
	12H	9.5	9.8	10.0	10.3	10.8	10.6	10.9	11.2	11.4	12.0
12H	4H	9.3	9.7	9.8	10.2	10.7	9.9	10.3	10.4	10.7	11.2
	6H	9.5	9.8	10.0	10.3	10.8	10.4	10.7	10.9	11.2	11.7
	8H	9.5	9.8	10.1	10.3	10.9	10.6	10.8	11.1	11.4	11.9

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	792.7	763.0	708.8	716.0	731.1	818.5	928.1
50°	772.1	742.0	632.9	632.5	636.6	743.9	902.5
55°	789.0	786.8	683.9	621.9	602.7	719.5	877.0
60°	698.8	703.0	733.2	646.0	598.1	695.9	816.6
65°	595.8	602.5	667.7	651.0	607.4	660.0	739.9
70°	472.2	486.7	570.4	605.1	582.6	609.6	653.4
75°	344.0	360.1	445.8	537.0	533.6	544.2	565.2
80°	243.3	252.0	309.5	405.5	448.6	441.1	444.9
85°	198.4	201.3	234.9	304.5	321.8	329.3	301.8

