

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TL12DV4FXG3C
EAN: 4058352908204

LP number
59101_318



Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting AC-mode
Rated values Net luminous flux = 15420 lm
Power consumption = 89.1 W
Luminous efficacy = 173.1 lm/W

serial
documentation
17.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 671 cd/klm

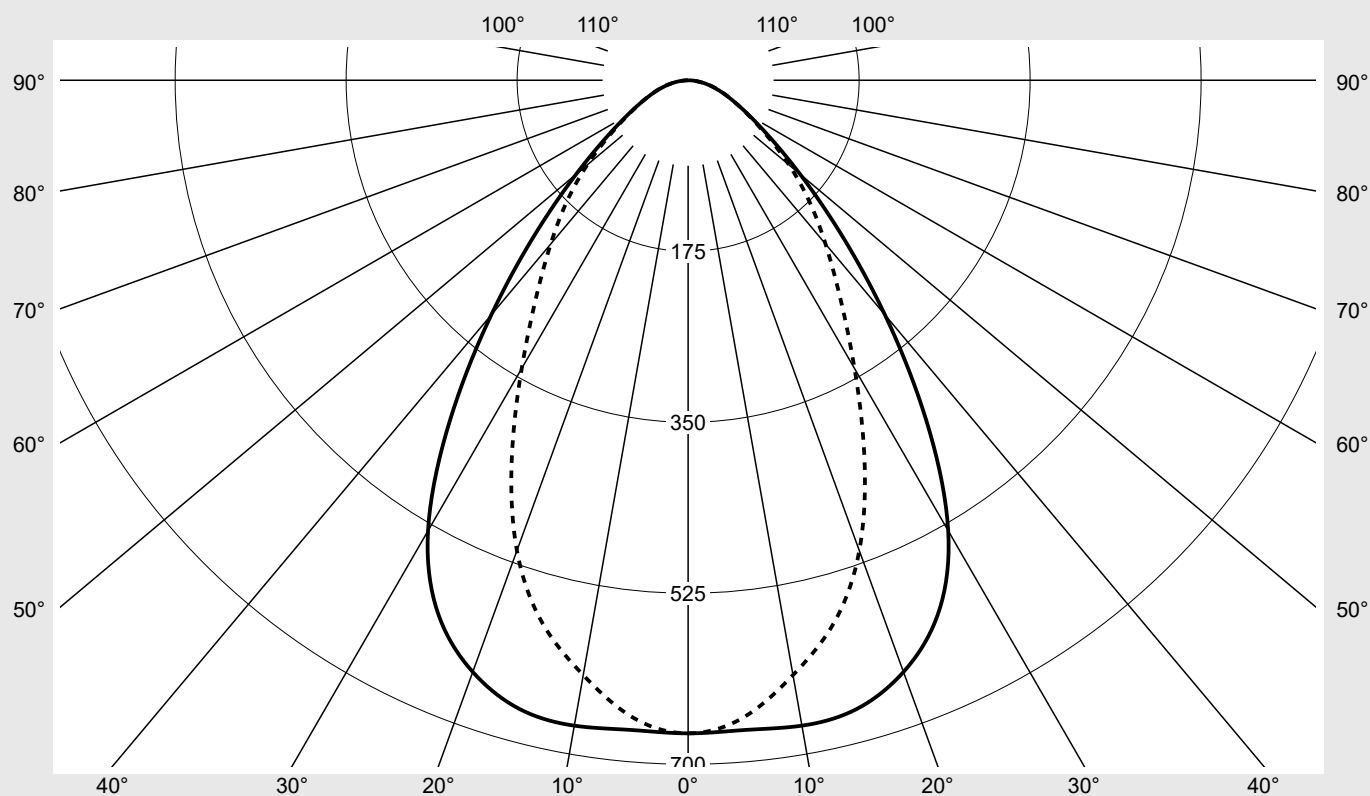

Classifications

DIN 5040 A 6 0
CIE N1=72 N2=92 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL12DV4FXG3C EAN: 4058352908204	LP number 59101_318
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	668.4	668.4	668.4	668.4	668.4	668.4	668.4	4.0	4.0
5°	667.5	664.4	657.4	655.8	655.7	654.2	654.4	31.4	35.4
10°	670.7	665.0	649.1	636.1	625.3	618.7	618.1	60.9	96.3
15°	666.2	657.2	632.9	612.0	594.0	578.5	575.5	87.4	183.7
20°	644.4	632.9	606.9	585.4	554.6	522.7	512.3	108.8	292.5
25°	604.1	590.6	566.7	541.2	494.5	444.9	427.0	121.8	414.2
30°	532.4	517.7	496.3	466.1	413.9	359.9	340.6	122.9	537.1
35°	425.0	409.7	387.0	361.9	325.4	286.0	271.1	111.0	648.1
40°	313.4	295.8	270.7	255.1	246.8	229.4	218.8	91.8	739.9
45°	219.2	200.3	175.7	171.1	181.8	184.7	175.5	71.8	811.7
50°	149.7	132.6	112.6	116.3	133.0	145.6	134.9	54.8	866.5
55°	102.7	89.1	74.7	81.5	98.1	107.9	98.1	41.3	907.7
60°	72.4	62.1	51.3	58.3	71.8	76.5	71.0	31.0	938.7
65°	52.1	44.3	35.9	41.6	51.4	54.2	52.1	23.1	961.9
70°	37.6	31.7	24.7	29.1	35.6	38.4	38.3	16.9	978.8
75°	26.0	21.3	16.2	19.0	22.9	25.9	26.8	11.6	990.4
80°	16.1	12.5	9.2	10.4	12.6	14.8	15.7	6.8	997.3
85°	7.0	5.4	3.8	4.1	4.8	5.7	5.8	2.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed			Order number: 52TL12DV4FXG3C EAN: 4058352908204						LP number 59101_318		
UGR-Table			Standard room						siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.8	23.3	22.2	23.6	23.9	21.8	23.2	22.1	23.5	23.8
	3H	22.4	23.7	22.8	24.0	24.4	22.6	23.8	22.9	24.2	24.5
	4H	22.7	23.9	23.1	24.2	24.6	22.9	24.1	23.3	24.4	24.8
	6H	23.0	24.0	23.4	24.4	24.8	23.2	24.2	23.6	24.6	25.0
	8H	23.1	24.1	23.6	24.5	24.9	23.3	24.3	23.7	24.7	25.1
	12H	23.2	24.1	23.6	24.5	24.9	23.3	24.2	23.8	24.6	25.1
4H	2H	22.0	23.2	22.4	23.5	23.9	22.0	23.2	22.4	23.5	23.9
	3H	22.7	23.7	23.1	24.0	24.5	22.9	23.9	23.4	24.3	24.7
	4H	23.0	23.9	23.5	24.3	24.7	23.4	24.3	23.8	24.7	25.1
	6H	23.3	24.1	23.8	24.5	25.0	23.7	24.5	24.2	24.9	25.4
	8H	23.5	24.2	24.0	24.6	25.1	23.9	24.5	24.3	25.0	25.5
	12H	23.6	24.2	24.1	24.6	25.1	24.0	24.5	24.4	25.0	25.5
8H	4H	23.1	23.8	23.6	24.2	24.7	23.4	24.1	23.9	24.6	25.0
	6H	23.5	24.0	23.9	24.5	25.0	23.9	24.4	24.4	24.9	25.4
	8H	23.6	24.1	24.1	24.6	25.1	24.0	24.5	24.5	25.0	25.5
	12H	23.8	24.2	24.3	24.7	25.2	24.2	24.6	24.7	25.1	25.6
12H	4H	23.1	23.7	23.6	24.2	24.7	23.5	24.0	23.9	24.5	25.0
	6H	23.5	23.9	24.0	24.4	25.0	23.9	24.3	24.4	24.8	25.4
	8H	23.6	24.0	24.2	24.5	25.1	24.1	24.5	24.6	25.0	25.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 2250 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	36632.7	33479.1	29355.8	28597.5	30379.5	30864.3	29331.1
50°	27516.0	24370.3	20700.8	21380.0	24447.9	26768.3	24789.8
55°	21149.9	18360.6	15392.5	16794.3	20205.0	22238.1	20199.8
60°	17105.4	14683.4	12125.2	13788.0	16960.1	18081.2	16773.9
65°	14567.3	12398.5	10050.8	11637.8	14384.2	15141.3	14553.4
70°	12981.4	10945.8	8534.7	10037.6	12287.3	13266.8	13233.2
75°	11869.6	9722.9	7411.0	8664.2	10459.8	11806.1	12231.6
80°	10947.9	8535.0	6279.3	7107.4	8592.2	10104.2	10711.8
85°	9494.3	7312.9	5164.0	5568.0	6545.5	7665.4	7914.8

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TL12DV4FXG3C
EAN: 4058352908204

LP number
59101_318

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

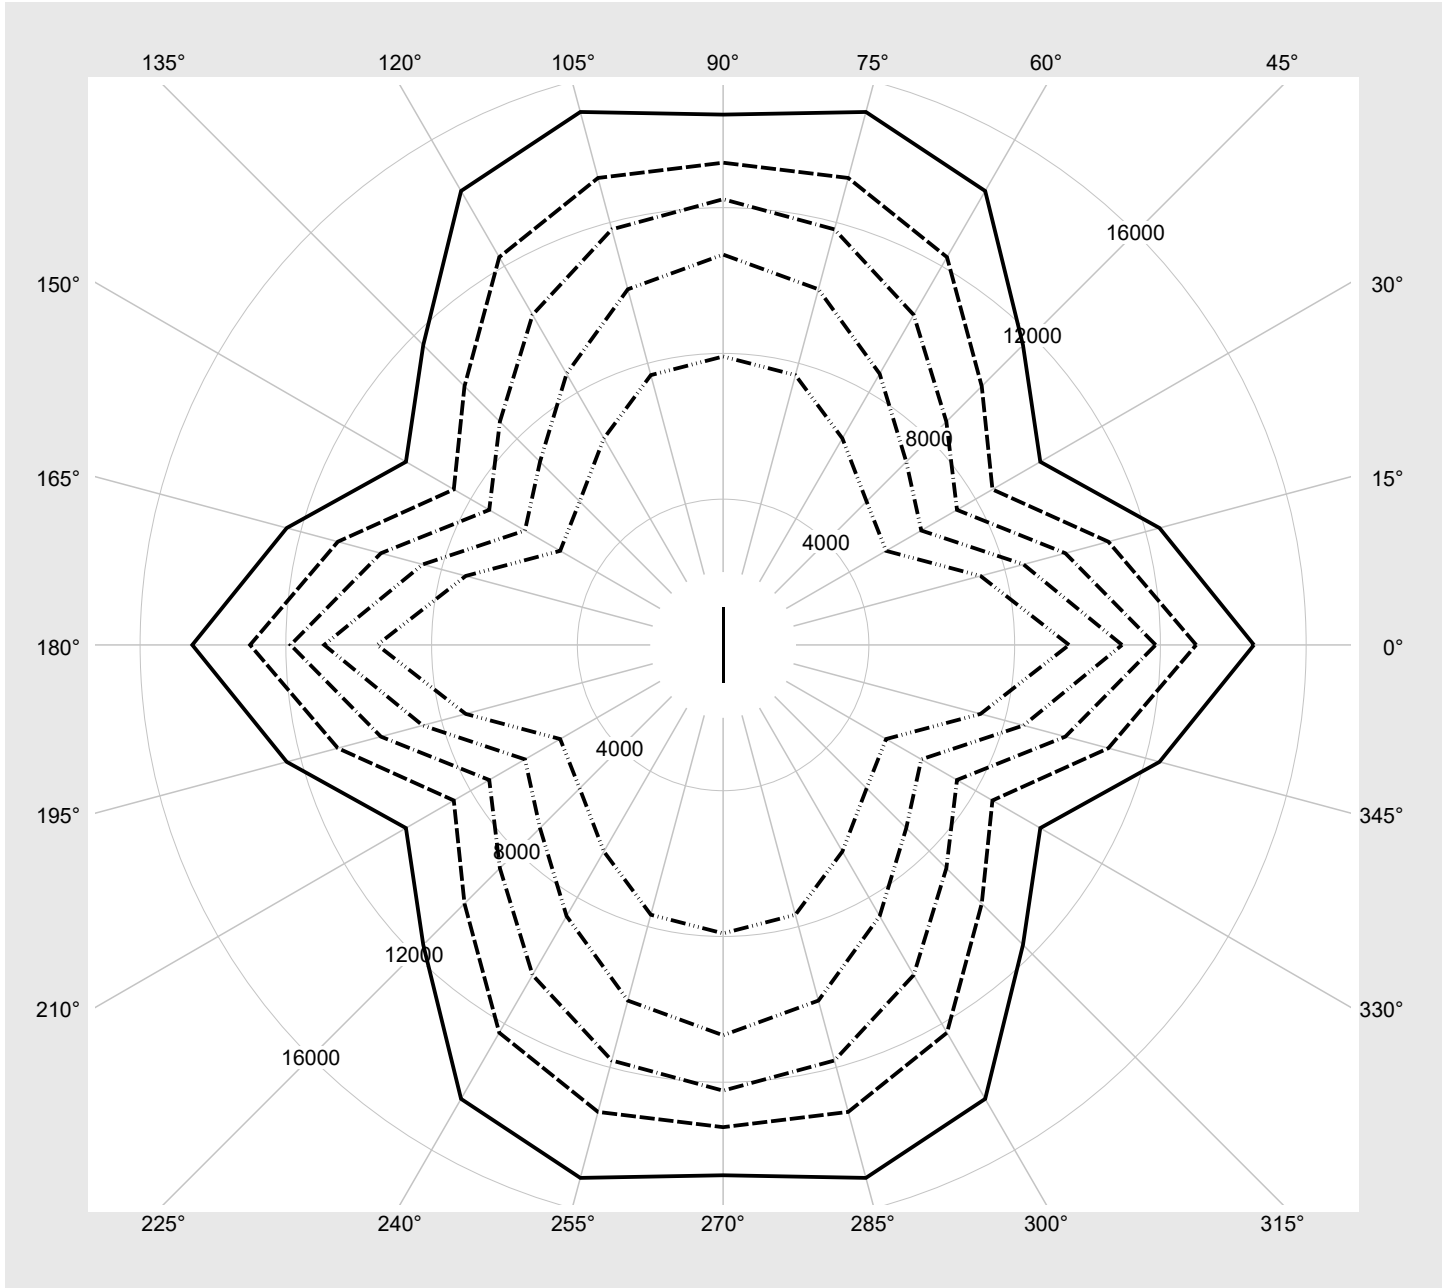

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL12DV4FXG3C EAN: 4058352908204	LP number 59101_318
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15420	89.1
95	240	252	14644	84.5
90	226	250	13858	79.9
85	213	248	13119	75.5
80	199	245	12316	70.8
75	186	243	11558	66.5
70	173	240	10797	62.1
65	160	237	10030	57.8
60	147	234	9255	53.5
55	134	231	8471	49.2
50	122	227	7739	45.2
45	109	223	6940	41.1
40	97	219	6198	37.2
35	84	213	5386	33.0
30	72	208	4628	29.1
25	60	201	3866	25.3
20	48	193	3098	21.2
15	36	182	2325	17.1
10	24	168	1547	12.8
5	12	142	764	8.2
2	4	102	236	5.2