

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TE12MN4FXM
EAN: 4058352889725

LP number
59446_75



Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 15100 lm
Power consumption = 83.1 W
Luminous efficacy = 181.7 lm/W

serial
documentation
24.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 728 cd/klm

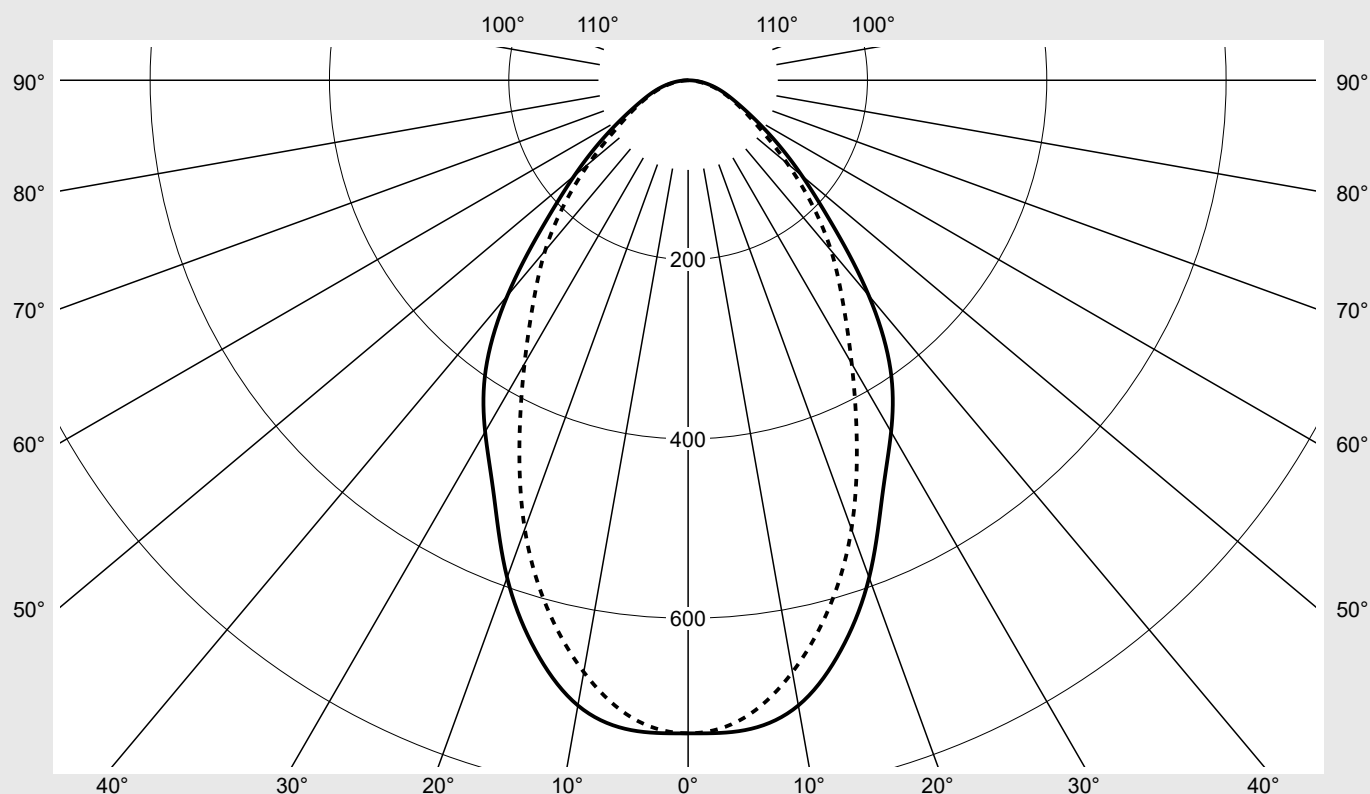

Classifications

DIN 5040 A 5 0
CIE N1=69 N2=91 N3=98
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12MN4FXM EAN: 4058352889725	LP number 59446_75
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	728.4	728.4	728.4	728.4	728.4	728.4	728.4	4.4	4.4
5°	727.5	724.8	717.6	716.9	716.5	714.4	713.9	34.3	38.7
10°	708.0	704.6	693.5	687.1	680.0	672.5	670.2	65.5	104.1
15°	658.1	653.2	637.7	629.5	623.7	612.7	608.6	89.6	193.8
20°	590.3	582.5	562.9	551.9	546.6	538.5	532.6	104.5	298.2
25°	512.2	499.8	475.2	461.5	453.8	449.4	445.1	108.8	407.1
30°	452.8	433.7	396.2	371.8	363.4	365.0	364.9	106.8	513.9
35°	393.4	374.1	335.3	295.7	285.6	295.2	300.5	101.3	615.2
40°	313.5	300.8	276.8	238.3	224.4	239.2	248.1	91.6	706.8
45°	227.2	217.7	208.5	191.4	176.2	187.2	194.9	77.0	783.8
50°	165.8	151.3	143.3	147.8	138.9	142.4	144.5	61.5	845.3
55°	119.7	105.2	93.7	108.9	109.4	104.2	103.2	47.4	892.7
60°	84.3	73.0	63.0	78.5	83.8	75.4	76.1	35.9	928.6
65°	60.6	51.5	43.5	55.3	61.5	55.5	56.9	27.0	955.6
70°	44.8	36.9	29.5	37.3	40.5	40.0	42.0	19.5	975.1
75°	31.9	25.4	19.2	23.6	27.6	27.0	29.3	13.5	988.6
80°	20.2	15.5	11.1	12.8	15.3	15.6	17.2	8.0	996.7
85°	9.4	7.2	4.9	5.0	5.8	6.0	6.3	3.3	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report


Family Licross® 21 Recessed			Order number: 52TE12MN4FXM EAN: 4058352889725							LP number 59446_75	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	23.8	25.2	24.1	25.5	25.8	23.4	24.8	23.7	25.1	25.4
	3H	24.4	25.7	24.8	26.1	26.4	24.2	25.5	24.6	25.8	26.2
	4H	24.8	26.0	25.2	26.3	26.7	24.5	25.7	24.9	26.1	26.5
	6H	25.1	26.2	25.5	26.6	27.0	24.8	25.9	25.2	26.3	26.7
	8H	25.3	26.3	25.7	26.7	27.1	25.0	25.9	25.4	26.3	26.7
	12H	25.4	26.3	25.8	26.7	27.1	25.0	25.9	25.4	26.3	26.7
4H	2H	24.0	25.2	24.4	25.6	26.0	23.7	24.9	24.1	25.3	25.7
	3H	24.8	25.8	25.2	26.2	26.6	24.7	25.7	25.2	26.1	26.5
	4H	25.2	26.1	25.6	26.5	26.9	25.2	26.1	25.6	26.5	26.9
	6H	25.6	26.4	26.1	26.8	27.3	25.6	26.3	26.0	26.8	27.2
	8H	25.8	26.5	26.2	26.9	27.4	25.7	26.4	26.1	26.8	27.3
	12H	25.9	26.5	26.4	27.0	27.5	25.8	26.4	26.3	26.8	27.3
8H	4H	25.3	26.0	25.8	26.4	26.9	25.3	26.0	25.8	26.4	26.9
	6H	25.7	26.3	26.2	26.8	27.3	25.7	26.3	26.2	26.8	27.3
	8H	25.9	26.4	26.4	26.9	27.4	25.9	26.4	26.4	26.9	27.4
	12H	26.1	26.5	26.7	27.0	27.6	26.0	26.4	26.5	26.9	27.5
12H	4H	25.3	25.9	25.8	26.4	26.9	25.3	25.9	25.8	26.4	26.9
	6H	25.8	26.2	26.3	26.7	27.2	25.8	26.2	26.3	26.7	27.3
	8H	26.0	26.4	26.5	26.9	27.4	26.0	26.4	26.5	26.9	27.4

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	55779.3	53433.0	51178.0	46987.3	43252.9	45937.7	47831.4
50°	44778.2	40850.0	38691.5	39896.0	37515.8	38444.4	39005.0
55°	36229.5	31846.0	28358.3	32957.2	33116.7	31527.4	31232.1
60°	29277.7	25330.2	21861.3	27244.6	29078.4	26174.4	26427.1
65°	24878.1	21149.5	17854.1	22714.6	25266.2	22810.3	23376.2
70°	22718.2	18740.7	14949.4	18949.8	20575.7	20273.7	21329.8
75°	21389.4	17017.7	12884.2	15835.5	18503.8	18112.8	19654.5
80°	20217.1	15525.4	11112.6	12784.7	15262.5	15575.4	17194.6
85°	18745.2	14334.2	9672.3	10026.8	11572.1	11912.6	12543.9

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12MN4FXM EAN: 4058352889725	LP number 59446_75
Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°		

siteco

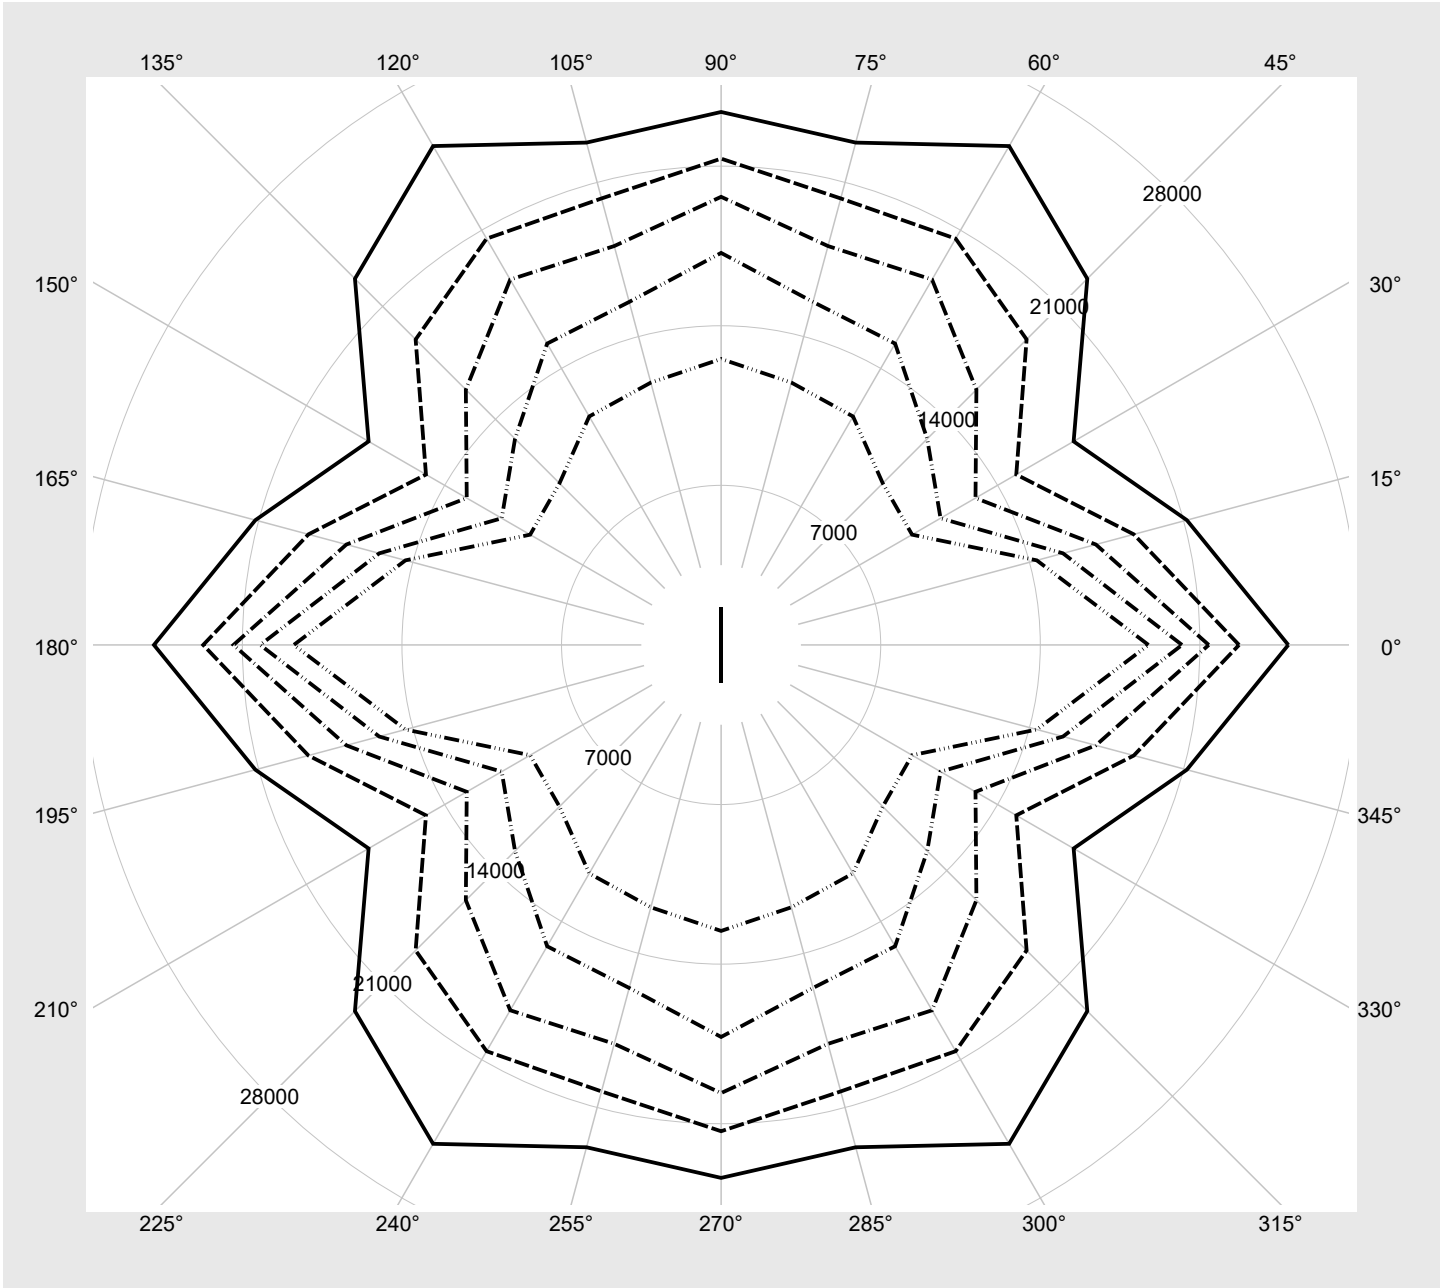

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12MN4FXM EAN: 4058352889725	LP number 59446_75
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	15100	83.1
2	A	C	F	14180	77.5
3	A	D	E	13110	71.1
4	A	D	F	12160	65.4
5	B	C	E	11120	59.4
6	B	C	F	10150	53.9
7	B	D	E	9080	47.9
8	B	D	F	8080	42.4