

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TL14MN4AXG
EAN: 4058352891247

LP number
58683_316



Version cover frosted, asymmetric distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 10120 lm
 Power consumption = 60.5 W
 Luminous efficacy = 167.3 lm/W

serial
documentation
24.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 681 cd/klm

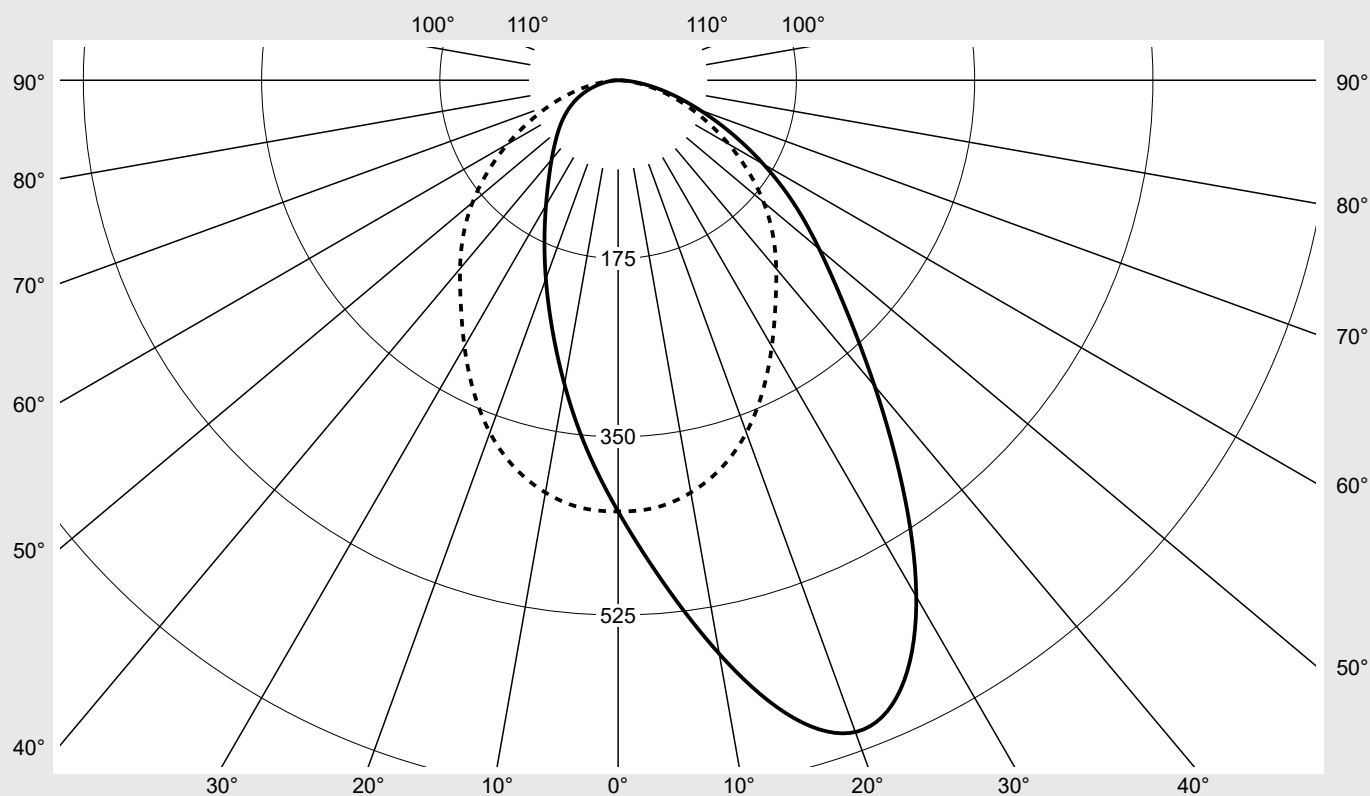

Classifications

DIN 5040 A 4 0
 CIE N1=56 N2=84 N3=97
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL14MN4AXG EAN: 4058352891247	LP number 58683_316
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	423.3	423.3	423.3	423.3	423.3	423.3	423.3
5°	492.9	491.4	480.7	469.8	456.1	438.7	421.2
10°	571.7	566.6	544.9	518.0	484.6	447.0	411.0
15°	644.7	637.1	605.9	562.5	507.2	447.4	393.4
20°	680.9	674.8	644.8	594.0	519.7	438.2	368.1
25°	657.9	657.6	642.1	600.0	518.2	419.3	336.2
30°	585.4	591.2	594.0	574.0	501.7	394.4	301.7
35°	486.6	496.5	513.6	518.9	472.6	367.8	269.2
40°	391.6	400.9	423.7	447.6	435.3	342.4	241.4
45°	315.0	320.7	340.1	373.0	389.0	312.9	214.9
50°	257.7	259.4	273.6	305.9	334.9	275.1	186.5
55°	210.4	209.0	219.8	247.0	276.4	230.5	156.0
60°	164.7	163.2	172.4	194.6	218.3	183.7	125.4
65°	122.2	121.6	130.0	147.7	165.1	139.3	96.1
70°	85.2	85.7	92.4	106.6	118.3	100.1	70.2
75°	55.7	56.1	61.0	71.1	77.9	65.9	46.5
80°	31.6	31.9	35.4	40.3	43.4	36.3	25.7
85°	13.1	12.9	14.6	16.5	16.2	13.2	9.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	423.3	423.3	423.3	423.3	423.3	423.3	2.5	2.5
5°	404.2	389.5	375.7	365.6	362.1	361.8	20.2	22.8
10°	378.5	351.6	328.9	312.6	305.3	303.2	40.3	63.1
15°	347.6	311.7	283.3	263.5	254.2	251.1	59.8	123.0
20°	312.8	271.7	241.2	220.7	211.0	207.4	77.2	200.1
25°	275.0	232.7	202.9	183.7	174.4	171.0	89.9	290.0
30°	237.7	196.9	169.7	152.6	144.6	141.7	96.4	386.5
35°	204.1	165.0	141.0	127.0	121.0	118.9	96.9	483.4
40°	176.0	138.8	117.2	106.8	102.8	101.6	93.4	576.7
45°	151.3	116.9	98.0	90.5	88.3	87.8	87.1	663.9
50°	128.6	98.3	82.7	77.4	76.2	76.3	79.3	743.1
55°	107.1	82.4	69.7	65.9	65.5	66.0	69.9	813.0
60°	87.0	68.0	58.3	55.3	55.4	56.0	59.0	872.0
65°	68.6	55.0	47.7	45.3	45.4	45.9	47.4	919.5
70°	51.6	42.4	37.2	35.1	35.2	35.4	35.8	955.3
75°	35.3	29.8	26.5	24.5	24.4	24.5	24.7	980.0
80°	20.2	17.6	15.6	14.5	14.4	14.5	14.3	994.3
85°	7.8	7.1	6.7	6.2	6.2	6.3	5.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report


Family Licross® 21 Recessed	Order number: 52TL14MN4AXG EAN: 4058352891247	LP number 58683_316
--------------------------------	--	------------------------

UGR-Table		Standard room									sīteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	26.4	28.0	26.8	28.3	28.7	25.0	26.6	25.4	26.9	27.3	
	3H	27.4	28.8	27.8	29.2	29.5	26.2	27.6	26.5	27.9	28.3	
	4H	27.8	29.1	28.2	29.5	29.8	26.6	27.9	27.0	28.3	28.6	
	6H	28.0	29.3	28.4	29.6	30.0	26.8	28.1	27.3	28.4	28.8	
	8H	28.1	29.3	28.5	29.7	30.1	26.9	28.1	27.3	28.5	28.9	
	12H	28.2	29.3	28.6	29.7	30.1	27.0	28.1	27.4	28.5	28.9	
4H	2H	27.2	28.5	27.6	28.9	29.2	25.7	27.0	26.0	27.4	27.7	
	3H	28.3	29.4	28.7	29.8	30.2	27.0	28.2	27.5	28.6	29.0	
	4H	28.8	29.8	29.2	30.2	30.6	27.6	28.6	28.0	29.0	29.5	
	6H	29.1	30.0	29.5	30.4	30.9	28.0	28.9	28.4	29.3	29.8	
	8H	29.2	30.0	29.7	30.5	30.9	28.1	28.9	28.6	29.3	29.8	
	12H	29.3	30.0	29.8	30.5	31.0	28.2	28.9	28.7	29.3	29.8	
8H	4H	29.1	29.9	29.6	30.3	30.8	27.8	28.7	28.3	29.1	29.6	
	6H	29.5	30.2	30.0	30.7	31.2	28.4	29.0	28.8	29.5	30.0	
	8H	29.7	30.3	30.2	30.7	31.3	28.5	29.1	29.0	29.6	30.1	
	12H	29.8	30.3	30.3	30.8	31.3	28.6	29.1	29.1	29.6	30.2	
12H	4H	29.1	29.8	29.6	30.3	30.8	27.9	28.6	28.4	29.0	29.5	
	6H	29.6	30.2	30.1	30.7	31.2	28.4	29.0	28.9	29.5	30.0	
	8H	29.8	30.3	30.3	30.8	31.3	28.6	29.1	29.1	29.6	30.1	

Luminance table		Max. for $\gamma \geq 65^\circ$										Photometric dimensions in mm:		L = 1500 B = 58	
C-planes		0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	
γ		Luminance in cd/m²													
45°		51812.6	52749.0	55953.4	61363.6	63985.4	51479.7	35353.2	24897.0	19226.9	16114.0	14892.5	14529.3	14436.7	
50°		46627.7	46936.8	49511.9	55348.9	60613.7	49775.2	33751.9	23279.5	17796.1	14958.9	13998.7	13796.0	13809.8	
55°		42660.0	42390.7	44571.2	50086.6	56063.5	46738.9	31629.4	21727.7	16706.1	14134.6	13370.1	13285.5	13393.2	
60°		38314.3	37976.1	40109.4	45273.9	50791.5	42728.5	29162.6	20232.8	15814.2	13554.3	12875.9	12880.3	13036.4	
65°		33631.7	33457.7	35772.8	40647.0	45434.3	38332.0	26456.4	18878.8	15150.1	13121.8	12474.5	12493.5	12645.1	
70°		28969.6	29161.1	31432.6	36265.8	40223.6	34050.4	23873.8	17543.5	14413.9	12663.0	11920.9	11968.2	12024.0	
75°		25042.0	25212.7	27398.3	31946.6	35007.7	29627.1	20917.5	15869.5	13413.8	11890.2	10991.8	10966.2	10994.5	
80°		21200.1	21386.3	23695.3	27017.2	29042.2	24309.6	17234.4	13540.1	11795.1	10439.3	9739.9	9672.3	9727.2	
85°		17473.2	17278.3	19431.1	21972.2	21601.2	17582.6	12189.3	10424.9	9513.3	8879.4	8340.2	8297.5	8373.6	

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL14MN4AXG EAN: 4058352891247	LP number 58683_316
Luminance values in cd/m²		siteco
		γ 65° γ 70° γ 75° γ 80° γ 85°

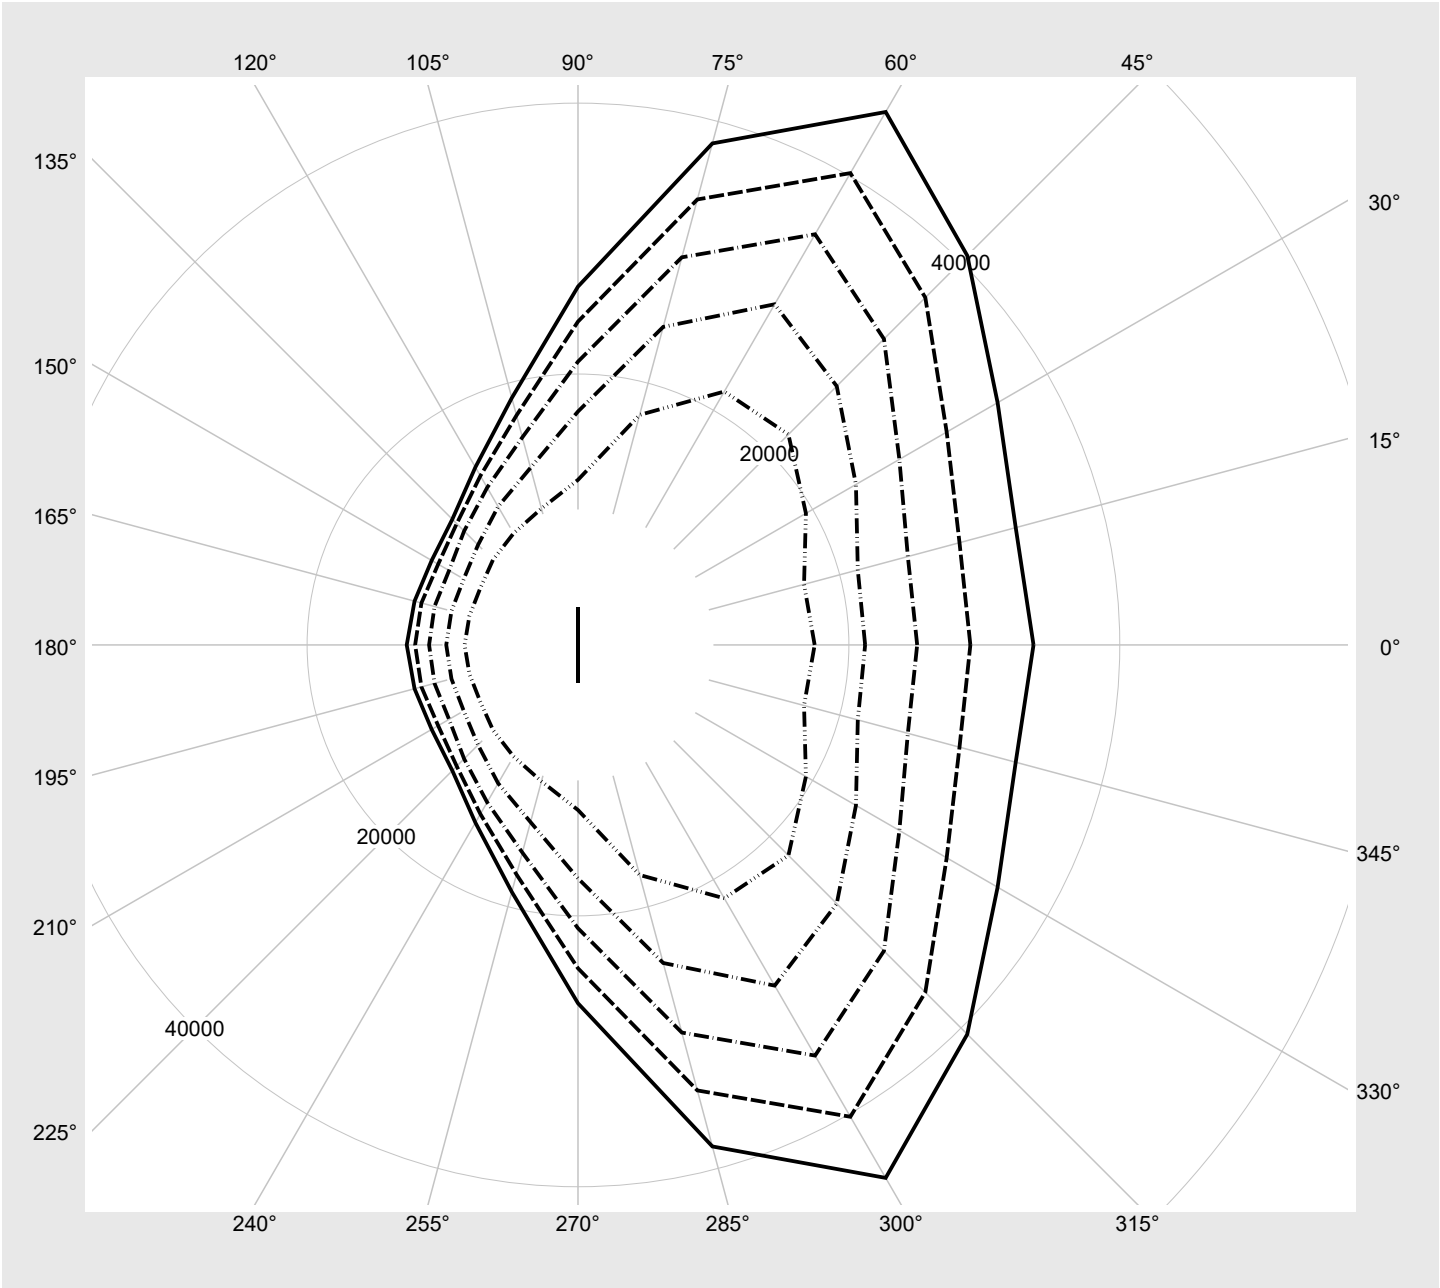

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL14MN4AXG EAN: 4058352891247	LP number 58683_316
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	10120	60.5
2	A	C	F	9530	56.5
3	A	D	E	9070	53.4
4	A	D	F	8600	50.3
5	B	C	E	8120	47.3
6	B	C	F	7640	44.4
7	B	D	E	7160	41.4
8	B	D	F	6660	38.4