
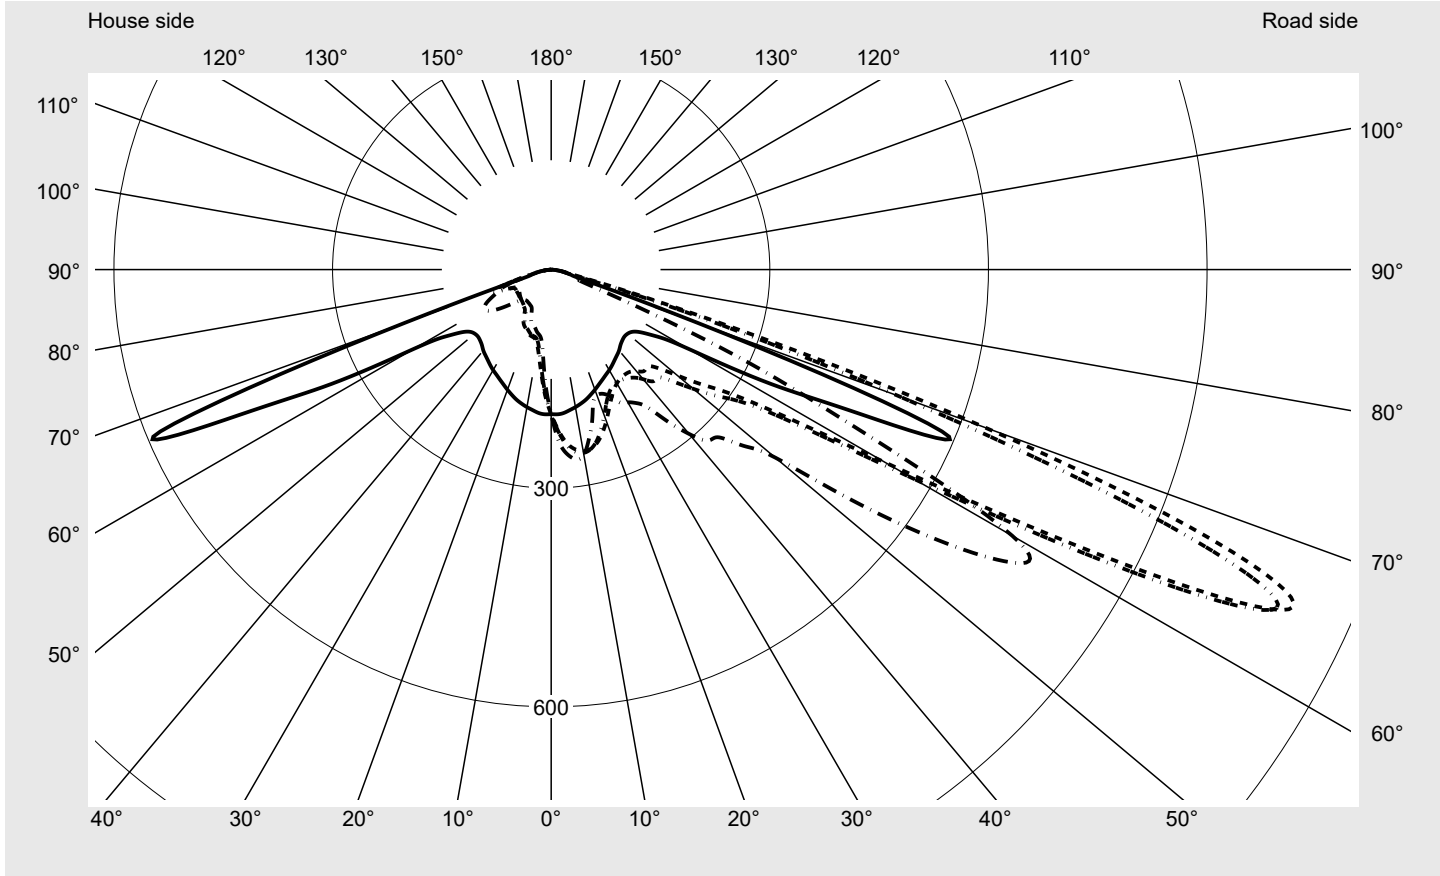


Photometric test report

Family Floodlight FL11 	Order number: 5XA779427D01BA EAN: 4058352608166	LP number 59241_39
	Version standard bracket Optic asymmetric distribution PL52 Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 148130 lm Power consumption = 1095.9 W Luminous efficacy = 135.2 lm/W	serial documentation 13.09.2023



Luminous intensity in cd/klm C180-0 C220-40 C225-45 C270-90 **Imax: 1105 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	749.2
Imax 80°	33.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779427D01BA EAN: 4058352608166	LP number 59241_39
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

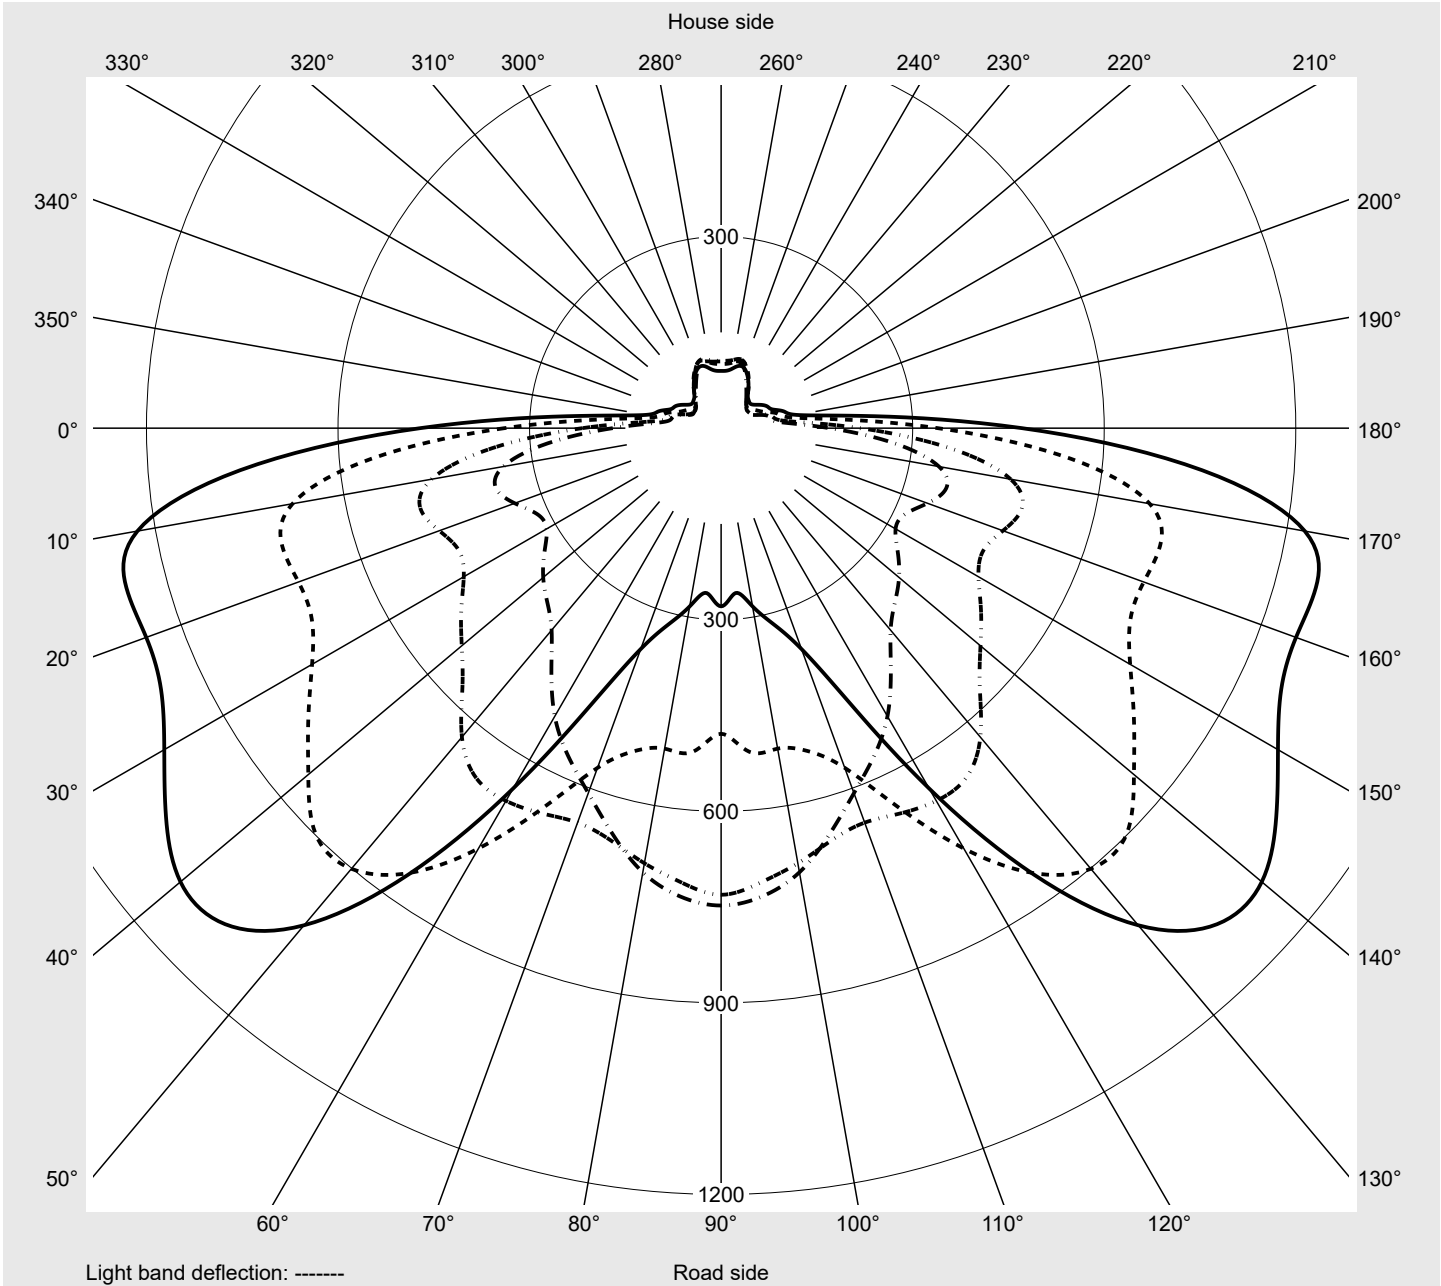

Photometric test report

Family Floodlight FL11	Order number: 5XA779427D01BA EAN: 4058352608166	LP number 59241_39
---	--	-------------------------------------



Table of values for luminous intensities Maximum luminous intensity


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	198.7	201.8	204.8	207.9	210.5	213.1	215.6	218.0	220.0	222.1	223.9	225.2	226.6
5,0°	197.5	203.9	210.1	215.9	221.0	226.1	230.5	234.7	238.2	241.5	244.4	246.7	248.8
7,5°	194.5	204.0	212.8	220.8	227.9	234.4	239.8	244.7	248.5	251.9	254.7	256.6	258.2
10,0°	191.6	203.6	214.7	224.5	232.6	239.7	245.3	249.8	253.0	255.4	256.9	257.5	257.7
12,5°	188.3	202.7	215.6	226.6	235.2	242.2	247.1	250.3	251.7	252.0	251.1	249.3	247.1
15,0°	184.6	201.1	215.3	227.2	236.0	242.1	245.5	246.5	245.4	242.6	238.7	234.1	229.5
17,5°	180.1	198.7	214.3	226.4	234.7	239.4	240.6	238.8	234.4	228.4	221.6	215.0	208.9
20,0°	175.5	196.0	212.6	225.0	232.3	235.0	233.5	228.5	221.2	212.9	204.8	197.9	192.3
22,5°	170.8	193.2	210.9	223.1	229.2	229.5	225.0	216.9	207.2	198.1	190.9	186.0	183.2
25,0°	166.5	190.8	209.5	221.4	226.0	223.6	216.2	205.7	195.3	187.5	183.1	181.8	182.9
27,5°	162.6	188.9	208.7	220.2	223.0	217.9	207.4	195.5	186.2	181.2	181.1	184.8	190.2
30,0°	159.3	187.6	208.7	219.9	220.9	213.2	200.6	188.1	180.3	178.9	183.9	192.4	200.6
32,5°	155.6	186.4	208.9	219.9	219.2	209.1	195.1	182.6	176.9	179.4	188.7	200.9	210.7
35,0°	151.7	185.0	209.5	220.7	218.2	205.8	190.5	178.9	176.0	182.1	194.6	208.8	219.8
37,5°	148.2	184.6	210.6	222.0	217.8	203.0	187.2	177.0	177.0	186.9	202.3	219.6	234.1
40,0°	144.9	183.9	212.1	223.7	218.0	202.1	186.1	178.0	182.1	196.4	216.1	237.1	256.9
42,5°	140.7	183.2	213.9	225.3	218.0	200.6	184.8	179.7	188.7	207.7	230.6	252.9	273.8
45,0°	137.8	184.0	217.3	228.0	217.6	196.8	179.6	176.1	187.8	209.2	234.2	258.2	278.2
47,5°	136.2	188.2	224.9	235.1	222.0	198.5	182.2	183.4	200.9	227.5	253.2	274.4	292.0
50,0°	136.9	195.8	237.5	249.0	234.0	209.5	195.4	202.1	226.1	254.5	277.3	293.1	307.0
52,5°	140.3	208.3	256.9	270.1	254.2	229.3	218.2	230.9	257.7	284.1	301.5	311.8	324.9
55,0°	150.0	230.6	289.0	303.9	285.4	259.2	250.9	267.2	293.3	315.0	328.7	342.9	377.4
57,5°	169.9	272.7	346.5	364.8	343.9	318.1	315.5	337.7	363.8	385.1	413.0	463.4	521.0
60,0°	217.5	360.1	460.5	487.4	469.7	453.2	465.4	496.9	530.3	572.9	631.6	668.8	674.0
62,5°	339.5	549.8	681.6	711.7	704.4	707.4	739.7	789.2	844.0	898.4	900.8	850.3	760.1
65,0°	471.4	756.3	928.3	964.4	958.1	967.9	1007.0	1061.4	1105.4	1098.6	1016.3	853.0	651.7
67,5°	580.5	784.3	996.7	1047.0	1038.0	1032.0	1044.8	1049.4	1010.6	915.8	763.6	561.5	403.9
70,0°	214.6	443.1	619.1	717.7	749.2	739.5	731.6	704.1	633.2	506.4	378.9	314.3	250.3
72,5°	47.8	71.8	92.0	126.4	207.8	269.5	281.4	276.1	237.2	192.6	177.4	155.1	127.9
75,0°	28.7	31.6	33.7	36.4	44.1	64.2	72.8	73.1	64.5	40.1	61.7	56.1	51.5
77,5°	21.1	22.2	23.2	24.3	26.0	28.7	29.0	28.1	26.6	26.4	28.3	28.1	28.6
80,0°	16.3	15.8	15.8	16.5	17.1	18.1	17.9	17.5	17.5	17.8	17.8	18.0	22.8
82,5°	10.4	9.7	9.8	10.2	10.3	10.5	10.7	10.3	10.3	10.3	10.1	10.1	11.6
85,0°	5.3	4.8	4.8	4.9	4.9	5.0	4.9	4.8	4.6	4.3	4.2	4.0	3.9
87,5°	1.8	1.8	1.8	1.8	1.7	1.6	1.5	1.4	1.3	1.3	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779427D01BA EAN: 4058352608166	LP number 59241_39
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	227.8	228.9	229.7	230.2	230.5	235.4	195.7	192.6	189.5	186.4	183.3	180.4	177.7
5,0°	250.5	251.8	252.8	253.5	254.0	254.3	191.1	184.3	177.5	171.0	164.5	158.5	153.0
7,5°	259.5	260.4	261.0	261.4	261.7	262.5	184.9	174.8	164.9	155.3	146.2	138.0	130.6
10,0°	257.6	257.2	256.7	256.3	256.1	258.1	179.0	165.9	153.2	141.4	130.7	121.5	113.7
12,5°	244.8	242.5	240.5	239.0	238.3	238.7	172.8	157.2	142.3	129.2	118.1	109.5	103.1
15,0°	225.2	221.2	218.1	215.8	214.7	216.7	166.7	148.8	132.7	119.2	109.2	102.4	98.4
17,5°	203.8	199.6	196.5	194.5	193.6	191.8	159.7	140.2	123.3	110.8	102.7	98.4	96.4
20,0°	188.3	185.5	183.8	182.9	182.7	183.4	153.1	132.2	115.3	104.2	98.4	96.1	94.5
22,5°	181.8	181.2	181.4	182.1	183.0	184.5	146.4	124.6	108.3	99.1	95.4	93.6	91.3
25,0°	184.8	186.5	188.3	190.5	192.4	192.4	140.5	118.0	102.8	95.7	93.1	90.8	88.2
27,5°	194.5	196.9	199.1	202.3	204.3	206.0	134.7	111.9	98.3	92.9	90.5	87.9	85.5
30,0°	205.5	206.3	207.7	211.1	211.7	210.4	129.5	106.9	94.7	90.7	88.0	85.6	81.4
32,5°	214.6	214.1	215.3	219.3	217.5	217.2	124.3	101.9	91.5	88.2	85.5	82.6	74.4
35,0°	224.3	225.8	231.4	237.6	233.6	230.9	118.8	97.1	88.5	85.5	81.9	75.5	67.3
37,5°	242.5	248.6	257.2	261.7	261.4	262.9	113.6	92.6	85.7	83.0	75.6	67.8	63.3
40,0°	269.5	277.8	286.8	292.2	294.3	294.4	108.8	88.8	83.0	80.1	67.9	62.7	61.4
42,5°	288.1	296.4	305.4	312.4	315.9	318.3	103.7	85.1	80.7	76.5	62.5	60.1	59.5
45,0°	292.4	300.4	310.5	319.5	324.1	325.6	99.1	81.9	78.6	73.3	59.5	58.0	57.6
47,5°	307.0	315.2	326.9	341.7	349.2	358.0	95.5	79.4	76.9	70.2	57.2	56.1	56.1
50,0°	321.7	336.5	356.9	382.5	399.0	401.3	92.9	77.8	75.5	67.2	54.8	54.3	54.6
52,5°	349.2	386.2	431.6	478.4	507.7	518.9	91.7	76.8	74.7	64.5	52.7	52.4	52.9
55,0°	434.8	497.1	555.8	609.9	642.5	646.0	93.1	77.2	74.5	62.1	51.1	50.6	51.3
57,5°	566.7	608.2	657.7	706.3	736.2	747.6	99.1	79.8	75.3	60.4	50.3	49.1	49.8
60,0°	665.6	657.4	668.3	691.9	714.2	730.8	115.8	86.0	79.0	63.0	52.8	49.8	49.2
62,5°	654.2	566.1	523.5	509.6	508.8	478.7	166.6	102.4	89.9	74.1	64.4	58.1	53.1
65,0°	473.0	368.1	318.0	283.4	259.2	279.0	220.3	119.6	101.5	85.7	80.1	72.9	63.9
67,5°	303.2	234.6	127.7	94.1	83.6	72.6	142.4	96.1	89.7	82.1	80.7	77.1	70.6
70,0°	193.4	146.5	58.3	44.8	44.0	44.3	56.4	49.2	49.6	52.8	55.7	59.0	59.5
72,5°	97.7	77.0	42.5	37.4	37.6	37.8	32.8	32.2	32.2	33.2	34.5	37.6	39.2
75,0°	45.7	41.4	34.4	32.5	31.6	32.6	25.8	25.7	25.6	26.2	27.0	28.4	30.1
77,5°	30.7	31.6	27.6	23.6	22.4	21.6	20.5	19.9	19.4	20.0	20.3	21.3	22.5
80,0°	33.4	29.1	19.0	15.7	14.8	15.4	16.2	14.2	13.7	14.1	14.3	14.8	15.0
82,5°	15.5	14.5	10.2	8.8	8.3	8.3	9.7	8.6	8.7	8.8	9.0	8.8	8.7
85,0°	3.8	3.6	3.5	3.4	3.4	3.6	4.5	4.4	4.4	4.4	4.3	4.1	3.9
87,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.7	1.7	1.6	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779427D01BA EAN: 4058352608166	LP number 59241_39
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	0.3	0.3
2,5°	175.3	172.9	170.7	168.9	167.2	165.8	164.6	163.7	163.1	162.5	162.7	2.4	2.7
5,0°	147.8	143.2	139.0	135.4	132.4	129.7	127.5	125.9	124.7	124.0	123.9	4.6	7.3
7,5°	124.0	118.4	113.7	109.9	106.8	104.4	102.6	101.3	100.4	99.8	99.6	6.7	13.9
10,0°	107.5	102.7	99.2	96.7	95.0	93.7	92.9	92.3	91.9	91.6	91.5	8.6	22.5
12,5°	98.7	95.8	94.0	92.7	91.7	90.8	90.0	89.3	88.8	88.4	88.2	10.4	32.9
15,0°	96.0	94.3	92.8	91.0	89.2	87.6	86.2	85.2	84.3	83.8	83.6	11.8	44.7
17,5°	94.9	92.9	90.4	88.0	85.9	84.1	82.6	81.5	80.7	80.1	79.9	13.0	57.8
20,0°	92.4	89.9	87.5	85.5	83.6	81.9	80.4	79.2	78.5	78.0	77.8	14.2	72.0
22,5°	88.9	86.9	85.1	83.6	81.4	77.6	75.0	73.4	72.6	72.2	72.0	15.3	87.3
25,0°	86.1	84.2	82.4	78.8	74.1	69.7	66.1	64.7	64.0	63.6	63.4	16.5	103.8
27,5°	82.2	78.7	74.9	70.8	66.1	63.3	61.7	60.3	59.2	58.5	58.2	17.8	121.5
30,0°	75.0	70.4	67.7	65.0	63.5	62.1	60.4	58.9	57.8	57.0	56.7	19.1	140.7
32,5°	67.2	65.2	64.1	63.1	62.1	60.8	59.3	57.9	56.7	56.0	55.6	20.5	161.2
35,0°	64.0	63.3	62.4	61.6	60.9	59.8	58.5	57.2	56.2	55.4	55.0	22.1	183.2
37,5°	62.5	61.7	61.0	60.3	59.8	59.1	57.9	56.7	55.7	54.8	54.4	24.0	207.2
40,0°	60.8	60.3	59.7	59.3	59.0	58.5	57.8	57.0	56.2	55.3	54.8	26.3	233.5
42,5°	59.2	59.0	58.8	58.6	58.6	58.5	58.4	58.3	57.9	57.0	56.3	28.4	261.9
45,0°	57.9	58.2	58.3	58.5	58.8	59.5	60.4	61.2	61.4	60.6	59.9	29.9	291.8
47,5°	56.9	57.7	58.4	59.0	60.2	62.1	64.4	66.4	67.2	66.9	66.3	32.5	324.2
50,0°	55.7	57.2	58.7	60.5	63.0	66.5	71.0	74.6	76.0	76.1	75.8	36.1	360.3
52,5°	54.5	56.6	59.2	62.5	67.0	73.2	80.5	85.6	87.0	87.1	86.9	41.8	402.1
55,0°	53.2	56.1	60.0	65.4	72.4	81.8	91.8	97.7	97.9	97.6	97.6	50.1	452.3
57,5°	52.1	56.0	61.4	68.9	78.7	90.8	102.4	107.7	106.0	104.7	104.5	61.7	514.0
60,0°	51.3	55.7	62.6	72.2	83.7	96.6	108.4	112.2	108.5	106.0	105.6	76.9	590.9
62,5°	52.3	56.2	63.8	74.5	86.6	98.6	108.3	109.7	104.4	101.2	100.6	94.5	685.4
65,0°	59.7	61.2	65.1	74.3	85.2	94.9	101.5	100.6	94.0	90.2	89.6	105.6	791.0
67,5°	70.8	76.7	70.4	71.4	78.8	84.4	87.9	86.4	81.3	78.6	78.3	95.5	886.4
70,0°	69.5	84.7	76.7	65.7	68.6	73.5	76.3	74.7	70.1	67.6	67.4	61.9	948.4
72,5°	47.4	61.9	61.1	56.0	57.7	60.7	61.9	59.8	55.2	53.4	54.3	24.8	973.2
75,0°	31.9	36.3	40.3	42.5	47.6	45.9	45.5	43.5	40.1	38.7	40.0	10.9	984.1
77,5°	23.8	26.0	28.0	29.4	31.1	32.7	33.1	31.2	28.5	27.1	28.0	7.0	991.0
80,0°	15.7	16.7	17.9	18.7	18.9	19.5	19.8	18.6	17.3	16.5	16.4	4.8	995.8
82,5°	8.8	9.1	9.6	9.4	9.7	10.0	9.5	8.6	7.8	7.4	7.3	2.7	998.5
85,0°	3.9	3.8	3.7	3.5	3.2	2.9	2.8	2.8	2.7	2.7	2.7	1.1	999.6
87,5°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779427D01BA EAN: 4058352608166	LP number 59241_39
----------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 10°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	148130	1095.9
95	238	252	140886	1024.1
90	221	249	133357	948.2
85	205	246	125950	877.0
80	191	244	118435	815.4
75	176	241	110991	749.9
70	162	238	103549	689.3
65	149	234	95966	633.1
60	137	231	89116	582.0
55	122	227	81612	516.8
50	110	223	73873	466.1
45	98	219	66649	415.5
40	86	214	59181	364.4
35	75	209	52123	318.2
30	62	202	44188	263.8
25	52	196	36724	222.9
20	41	187	29556	177.9
15	30	176	22010	133.2
10	19	159	14442	88.6
5	9	132	7085	48.6
2	3	91	2696	23.1

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
90	221	249	129846	940.5
90	220	249	129365	936.1
85	203	246	121926	860.8
80	189	243	114728	799.6
75	174	240	107555	734.7
70	160	237	100425	674.5
65	148	234	93490	622.8
60	134	231	86097	563.1
55	120	227	79013	503.5
50	109	223	72107	457.3
45	96	218	64385	402.9
40	85	214	57710	356.2
35	73	208	50039	306.5
30	61	202	43124	256.8
25	51	195	35681	216.4
20	40	186	28553	171.9
15	30	176	21789	131.6
10	19	159	14309	87.5
5	9	132	7025	48.0
2	3	91	2674	22.8

Photometric test report

Family Floodlight FL11	Order number: 5XA779427D01BA EAN: 4058352608166	LP number 59241_39
---	--	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	148130.0	1095.9
25.0	143670.0	1087.7