

Photometric test report

Family
Floodlight FL21 mini

Order number: 5XA7776C4C1A
EAN: 4069025197344

LP number
58550_390



Version mounting bracket
Optic direct, asymmetric extremely wide distribution A610002
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear EVG-Smart Interface
Rated values Net luminous flux = 12460 lm
Power consumption = 89.0 W
Luminous efficacy = 140 lm/W

serial
documentation
20.09.2023

siteco

Luminous intensity in cd/klm

C180-0

C190-10

C195-15

C270-90


Imax: 745 cd/klm



Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7776C4C1A EAN: 4069025197344	LP number 58550_390
Envelope curve in cd/klm		KMK 65° KMK 62,5° KMK 60° KMK 57,5°

siteco

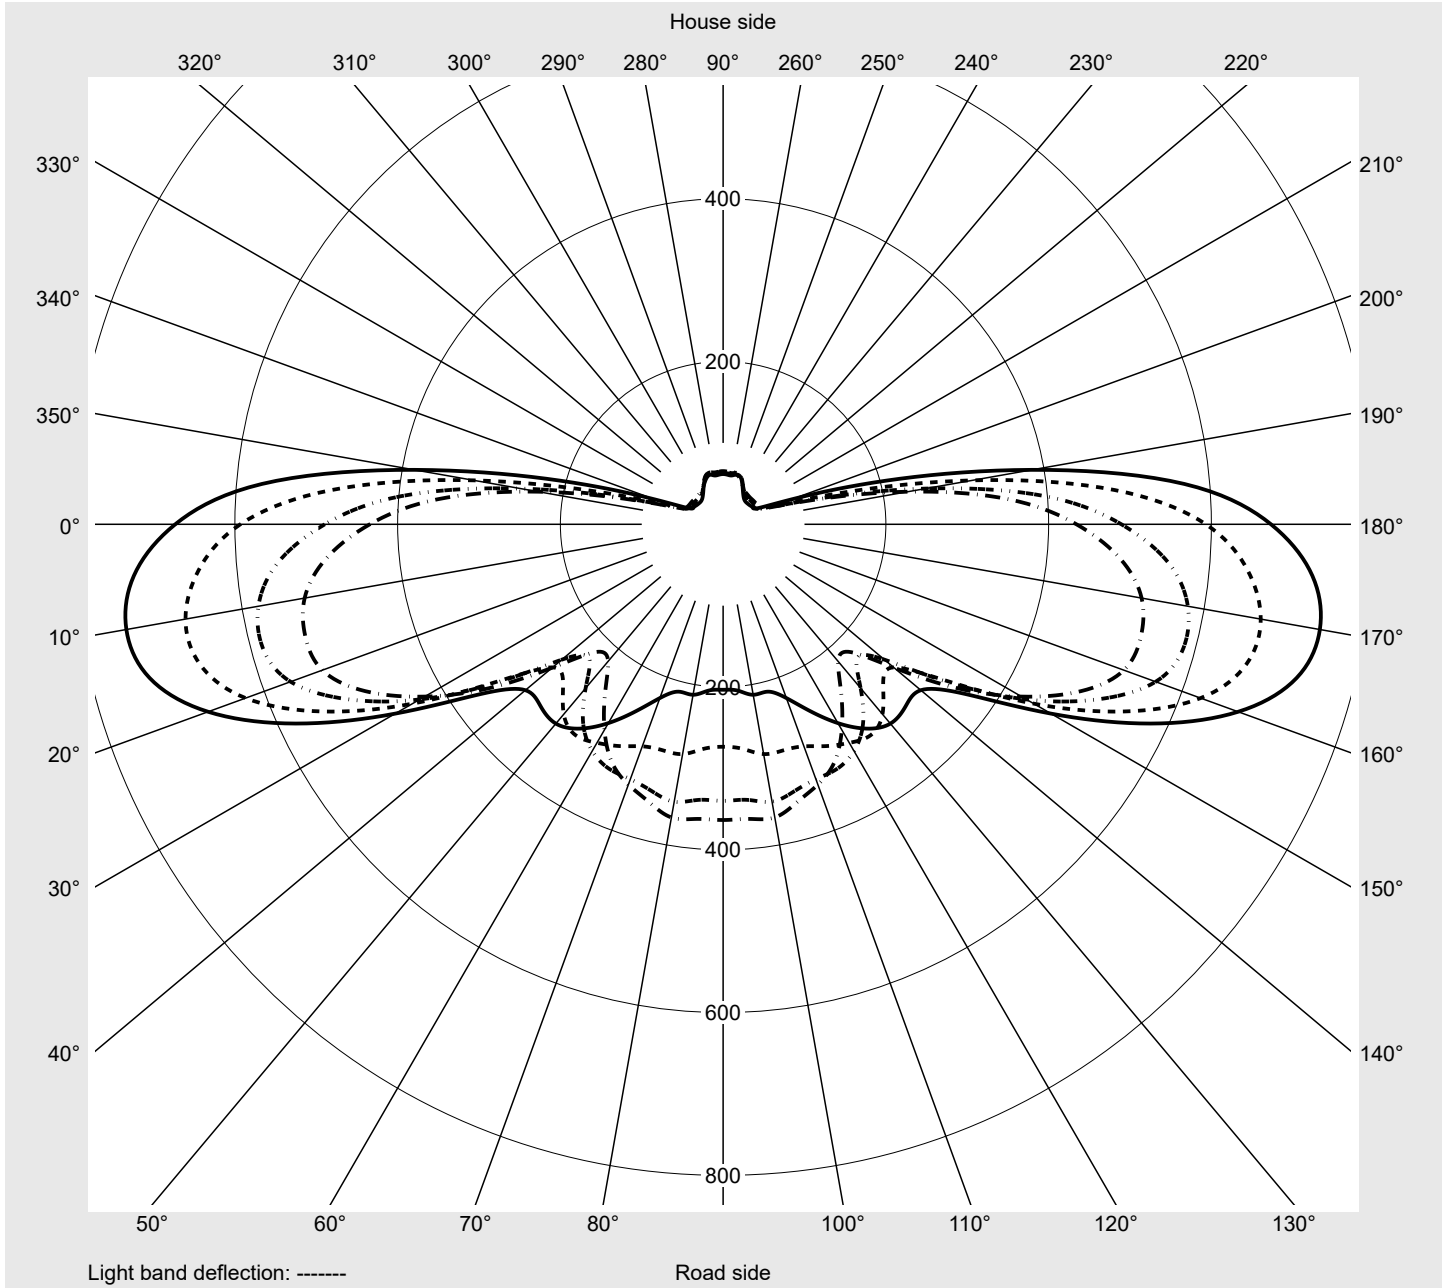

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7776C4C1A EAN: 4069025197344	LP number 58550_390
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	239.2	240.6	242.2	243.7	245.4	247.0	248.5	249.7	250.8	251.8	252.8	253.7	254.4
5,0°	239.5	242.7	245.9	249.0	251.9	254.7	257.2	259.4	261.3	263.0	264.5	265.8	266.9
7,5°	239.6	244.5	249.0	253.2	257.1	260.7	264.0	266.7	269.0	270.9	272.5	273.9	275.0
10,0°	240.7	247.3	253.2	258.3	262.9	266.8	270.2	272.8	274.8	276.2	277.6	279.1	280.5
12,5°	242.1	250.3	257.5	263.6	268.7	272.8	276.1	278.5	280.3	281.7	282.9	284.2	285.5
15,0°	243.2	253.2	261.6	268.3	273.6	277.7	281.0	283.8	286.1	287.9	289.3	290.5	291.6
17,5°	244.4	256.2	265.8	273.1	278.6	282.6	286.0	288.9	291.7	294.1	296.3	298.1	299.7
20,0°	247.2	262.0	273.1	280.6	285.3	288.9	292.0	294.9	297.5	300.4	303.7	306.4	308.1
22,5°	250.6	267.7	280.5	289.0	293.0	295.6	299.1	302.4	305.2	308.2	312.1	315.5	317.9
25,0°	253.7	271.8	285.2	293.6	298.4	302.0	305.7	309.5	313.2	316.6	319.7	323.6	326.3
27,5°	259.5	280.4	295.5	304.9	310.5	314.1	316.1	318.8	322.5	326.2	329.4	331.8	333.4
30,0°	262.3	285.3	301.7	311.7	318.2	323.2	326.6	328.9	330.9	334.2	335.4	334.9	332.8
32,5°	266.9	291.7	309.3	319.4	325.5	330.3	334.7	338.2	339.3	338.9	336.5	331.7	325.8
35,0°	273.0	300.4	319.1	330.7	337.7	342.5	346.3	348.7	347.4	340.9	331.9	324.2	315.2
37,5°	280.8	310.7	331.0	344.1	352.2	356.8	359.5	358.9	351.7	339.1	323.9	313.3	300.6
40,0°	291.0	324.4	346.4	360.2	368.8	374.4	376.5	369.9	354.1	333.7	312.4	293.8	275.9
42,5°	303.8	340.0	363.4	378.0	386.3	391.3	391.2	378.8	354.2	323.4	294.1	267.2	243.1
45,0°	316.2	356.0	380.1	394.5	403.2	407.8	401.4	380.8	347.9	309.8	273.1	238.7	207.4
47,5°	333.1	374.5	399.2	413.4	421.6	424.7	412.0	378.8	338.2	294.3	248.5	208.9	176.1
50,0°	349.4	394.1	420.1	434.7	442.0	440.1	418.4	377.5	326.4	275.1	222.7	184.4	169.2
52,5°	371.1	416.7	444.9	459.9	464.5	452.4	419.9	370.6	310.9	252.5	204.0	186.7	195.6
55,0°	396.9	446.5	476.8	490.8	491.6	467.2	422.8	361.7	293.9	233.1	204.4	210.0	235.1
57,5°	434.2	490.3	522.2	531.6	524.1	485.2	423.4	351.0	274.1	222.1	219.9	252.9	291.6
60,0°	489.5	549.8	579.9	585.8	565.7	508.8	430.4	338.9	258.8	233.1	262.9	299.7	321.7
62,5°	593.3	647.0	670.9	665.5	624.4	544.2	440.8	335.5	273.5	278.1	304.7	316.3	310.1
65,0°	673.3	726.9	744.7	729.6	673.5	579.4	465.3	363.6	317.2	316.8	319.7	306.5	282.1
67,5°	692.3	734.5	738.2	706.3	642.7	556.8	463.7	382.3	347.7	336.9	316.9	279.9	236.1
70,0°	629.0	640.5	619.1	578.0	519.0	457.0	394.4	353.3	340.5	324.9	286.4	233.9	198.5
72,5°	327.9	325.8	291.9	301.0	323.1	314.1	287.3	268.5	257.1	233.5	204.7	182.0	158.1
75,0°	97.0	63.1	54.8	75.1	154.3	189.6	178.5	152.6	113.5	87.4	107.1	102.2	86.8
77,5°	32.8	28.1	25.1	25.4	52.2	80.6	76.8	38.5	23.7	25.5	35.7	35.5	32.3
80,0°	20.7	17.4	17.1	16.6	19.5	24.8	19.4	13.3	12.8	13.0	14.2	16.7	16.3
82,5°	10.1	9.1	9.8	10.2	9.5	9.2	8.9	7.5	7.6	7.7	7.4	8.2	8.6
85,0°	3.6	3.2	3.4	3.4	3.3	3.4	3.4	3.4	3.4	3.4	3.2	3.2	3.1
87,5°	1.2	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.8	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7776C4C1A EAN: 4069025197344	LP number 58550_390
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	255.0	255.6	256.1	256.5	256.9	257.0	237.6	236.0	234.3	232.7	231.2	229.8	228.5
5,0°	267.7	268.3	269.0	269.7	270.2	270.3	236.0	232.3	228.7	225.1	221.6	218.2	215.0
7,5°	275.7	276.2	276.8	277.5	278.0	278.2	234.1	228.5	222.8	217.2	211.7	206.5	201.3
10,0°	281.4	282.1	282.9	283.9	284.6	284.9	233.4	225.6	217.7	209.9	202.2	194.8	187.6
12,5°	286.9	288.2	289.4	290.5	291.4	291.7	232.7	222.8	212.6	202.7	192.8	183.2	173.6
15,0°	293.1	295.1	297.1	298.7	299.6	299.8	231.8	219.5	207.0	194.8	182.8	171.1	159.1
17,5°	301.1	303.2	305.8	307.7	308.7	309.1	230.8	216.0	201.1	186.5	171.9	157.5	143.0
20,0°	309.2	310.8	313.6	315.4	316.0	316.0	230.5	213.1	195.5	178.2	160.7	143.4	127.2
22,5°	318.3	319.3	321.7	324.1	324.3	324.1	231.1	210.8	190.3	170.2	149.8	130.0	112.4
25,0°	327.4	327.5	328.5	330.3	329.8	329.1	232.1	208.5	184.8	161.1	138.0	116.2	95.6
27,5°	332.5	329.9	328.9	329.9	328.0	325.9	234.0	206.8	179.1	151.6	124.4	97.9	81.4
30,0°	329.4	323.9	321.5	321.3	317.4	313.1	234.1	203.6	172.4	141.4	106.9	82.4	76.2
32,5°	319.2	312.0	307.3	304.1	295.6	290.9	235.8	201.7	166.6	129.7	91.2	75.8	73.5
35,0°	305.5	295.3	287.6	278.7	266.3	263.1	238.3	200.3	161.0	115.5	79.9	72.0	70.9
37,5°	285.5	270.6	258.3	240.6	226.8	225.0	242.2	198.9	151.7	100.3	73.3	69.3	68.5
40,0°	255.6	237.1	219.7	195.2	185.0	183.7	248.0	198.8	140.1	85.3	68.2	66.5	65.9
42,5°	218.8	194.2	173.9	156.4	149.0	148.0	254.8	201.0	131.0	77.5	64.8	63.6	63.2
45,0°	181.0	156.7	141.7	130.5	126.7	127.1	263.3	201.7	120.4	71.4	61.7	60.7	60.4
47,5°	157.5	145.8	141.0	141.9	141.4	144.0	275.1	206.3	118.8	68.7	59.2	58.2	57.8
50,0°	172.0	175.4	180.4	188.9	191.2	194.6	287.2	210.9	113.6	65.4	56.6	55.6	55.1
52,5°	211.8	224.2	237.9	253.7	258.4	261.7	302.8	214.9	112.5	63.4	54.2	53.1	52.5
55,0°	265.3	288.2	308.0	327.0	329.2	331.6	321.4	220.0	112.7	61.3	51.8	50.5	50.0
57,5°	323.1	340.4	353.1	365.8	363.4	363.4	352.4	230.7	116.6	60.1	49.3	48.0	47.5
60,0°	331.5	333.4	339.3	346.1	339.9	339.9	397.0	252.7	122.8	59.8	46.9	45.5	45.0
62,5°	300.7	290.4	287.4	286.7	277.0	273.4	483.0	311.0	147.5	64.8	45.3	43.3	42.6
65,0°	253.4	227.2	212.9	212.7	205.1	203.4	568.9	385.2	207.0	89.5	46.7	41.7	40.4
67,5°	201.9	183.2	157.4	145.0	134.7	137.1	586.1	419.8	251.0	133.6	58.6	42.4	37.8
70,0°	179.3	159.0	76.7	59.5	55.4	61.0	469.1	325.6	213.5	120.4	59.8	44.4	36.6
72,5°	141.1	117.8	36.2	28.5	28.5	27.5	196.0	136.9	113.2	71.9	45.2	39.0	32.2
75,0°	76.2	62.7	25.0	21.1	20.9	19.7	57.7	36.1	37.9	34.6	27.7	25.8	23.8
77,5°	31.6	29.8	17.0	14.9	14.6	13.4	26.4	22.7	22.4	20.9	18.3	17.0	16.6
80,0°	14.2	13.2	10.0	9.3	8.7	8.1	18.9	15.6	13.6	13.0	11.9	11.2	11.1
82,5°	7.0	6.3	5.3	4.8	4.3	4.0	10.3	8.8	7.5	7.3	8.1	6.8	6.7
85,0°	2.6	2.3	1.9	1.7	1.7	1.6	3.8	3.4	3.2	3.3	3.7	3.4	3.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.3	1.3	1.3	1.4	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7776C4C1A EAN: 4069025197344	LP number 58550_390
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	0.4	0.4
2,5°	227.2	225.9	224.6	223.6	222.7	221.9	221.2	220.5	220.1	219.9	219.9	2.9	3.2
5,0°	212.0	209.0	206.3	203.8	201.6	199.6	197.9	196.6	195.6	195.2	195.0	5.6	8.9
7,5°	196.3	191.7	187.4	183.4	179.7	176.5	173.7	171.6	170.0	169.2	168.9	8.3	17.1
10,0°	180.5	173.8	167.5	161.7	156.3	151.7	147.7	144.7	142.5	141.3	140.9	10.7	27.9
12,5°	164.1	154.9	146.3	138.5	131.5	125.6	120.8	117.2	114.6	113.1	112.6	13.1	40.9
15,0°	147.0	135.8	125.6	116.9	109.5	103.6	99.0	95.9	93.7	92.4	91.9	15.3	56.2
17,5°	129.3	117.1	105.9	95.3	87.4	82.1	78.6	76.3	75.0	74.1	73.9	17.4	73.6
20,0°	113.2	98.1	85.6	79.3	76.7	75.0	73.8	72.9	72.0	71.4	71.2	19.7	93.3
22,5°	95.0	82.3	78.1	76.5	75.2	73.9	72.6	71.5	70.5	69.8	69.6	22.2	115.5
25,0°	81.5	77.6	76.4	75.4	74.3	72.9	71.5	70.2	69.0	68.1	67.7	24.6	140.0
27,5°	77.2	75.9	75.2	74.4	73.3	71.9	70.3	68.8	67.5	66.4	65.8	27.0	167.1
30,0°	75.0	74.4	74.0	73.4	72.4	71.1	69.4	67.6	66.1	64.8	64.1	29.1	196.2
32,5°	73.0	72.8	72.7	72.3	71.5	70.1	68.3	66.4	64.7	63.1	62.3	31.0	227.2
35,0°	70.7	70.7	71.1	70.8	70.1	68.7	66.8	64.7	62.8	61.1	60.1	32.6	259.8
37,5°	68.4	68.7	69.0	68.9	68.3	67.0	65.2	63.0	60.9	58.9	57.7	33.9	293.7
40,0°	65.9	66.3	66.6	66.6	66.1	64.9	62.8	60.8	58.8	56.8	55.7	34.8	328.4
42,5°	63.2	63.5	63.8	64.2	63.5	62.2	60.9	59.1	57.1	55.1	53.9	35.4	363.8
45,0°	60.3	60.4	60.9	60.8	60.4	59.8	59.0	57.6	56.0	54.0	52.7	35.9	399.7
47,5°	57.5	57.6	57.6	57.5	57.5	57.4	57.2	56.6	55.4	53.4	52.3	37.4	437.1
50,0°	54.8	54.7	54.2	54.4	54.7	55.2	55.8	56.1	55.4	53.9	52.9	40.1	477.3
52,5°	52.3	51.8	51.5	51.8	52.6	54.0	55.8	57.1	56.9	56.1	55.4	44.0	521.3
55,0°	49.7	49.1	49.3	49.8	51.2	54.0	57.2	59.7	59.7	59.4	59.0	49.0	570.3
57,5°	47.0	46.7	47.1	48.1	50.3	54.9	60.1	63.2	62.8	62.9	63.2	54.1	624.4
60,0°	44.4	44.3	44.9	46.7	50.3	56.4	63.0	65.8	64.7	64.9	65.4	58.2	682.6
62,5°	41.9	41.8	42.6	45.2	49.8	56.6	63.2	65.4	63.8	64.3	64.7	62.7	745.4
65,0°	39.4	39.1	40.3	43.4	48.5	55.5	62.0	63.2	60.9	61.1	61.7	66.5	811.9
67,5°	36.2	35.8	37.1	40.3	45.6	52.7	58.1	58.5	55.7	55.6	56.0	65.8	877.7
70,0°	32.2	31.7	33.2	36.7	41.9	47.8	51.8	51.5	48.8	48.0	48.6	56.2	933.9
72,5°	27.3	26.7	28.3	31.5	36.0	40.7	43.3	42.4	39.8	38.7	39.9	35.2	969.1
75,0°	21.9	21.8	23.2	26.0	29.5	33.0	34.3	33.1	30.6	30.0	31.7	16.3	985.4
77,5°	16.5	16.7	17.8	19.8	22.4	24.6	25.4	23.9	21.9	21.5	22.1	7.4	992.8
80,0°	11.3	11.4	12.2	13.6	15.1	16.4	16.6	15.2	13.9	13.5	13.6	3.9	996.7
82,5°	6.7	6.8	7.2	7.7	8.1	8.4	8.2	7.5	6.9	6.7	6.7	2.1	998.8
85,0°	3.2	3.1	3.2	3.3	3.4	3.6	3.5	3.1	2.8	2.7	2.7	0.8	999.7
87,5°	1.2	1.2	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7776C4C1A EAN: 4069025197344	LP number 58550_390
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	12460	89.0	93.8	91.4
95	239	252	11825	83.9	88.3	86.1
90	225	250	11225	79.1	83.3	81.2
85	211	247	10613	74.3	78.3	76.3
80	197	245	9990	69.6	73.2	71.4
75	183	242	9353	64.8	68.2	66.5
70	169	239	8708	60.1	63.2	61.6
65	156	236	8099	55.7	58.6	57.2
60	143	233	7484	51.3	54.0	52.6
55	130	229	6855	47.0	49.4	48.2
50	117	226	6219	42.7	44.8	43.8
45	105	222	5624	38.7	40.6	39.7
40	92	217	4970	34.3	36.0	35.2
35	80	212	4355	30.4	31.8	31.1
30	68	206	3736	26.5	27.6	27.0
25	56	199	3108	22.6	23.6	23.1
25	55	198	3055	22.3	23.3	22.8