
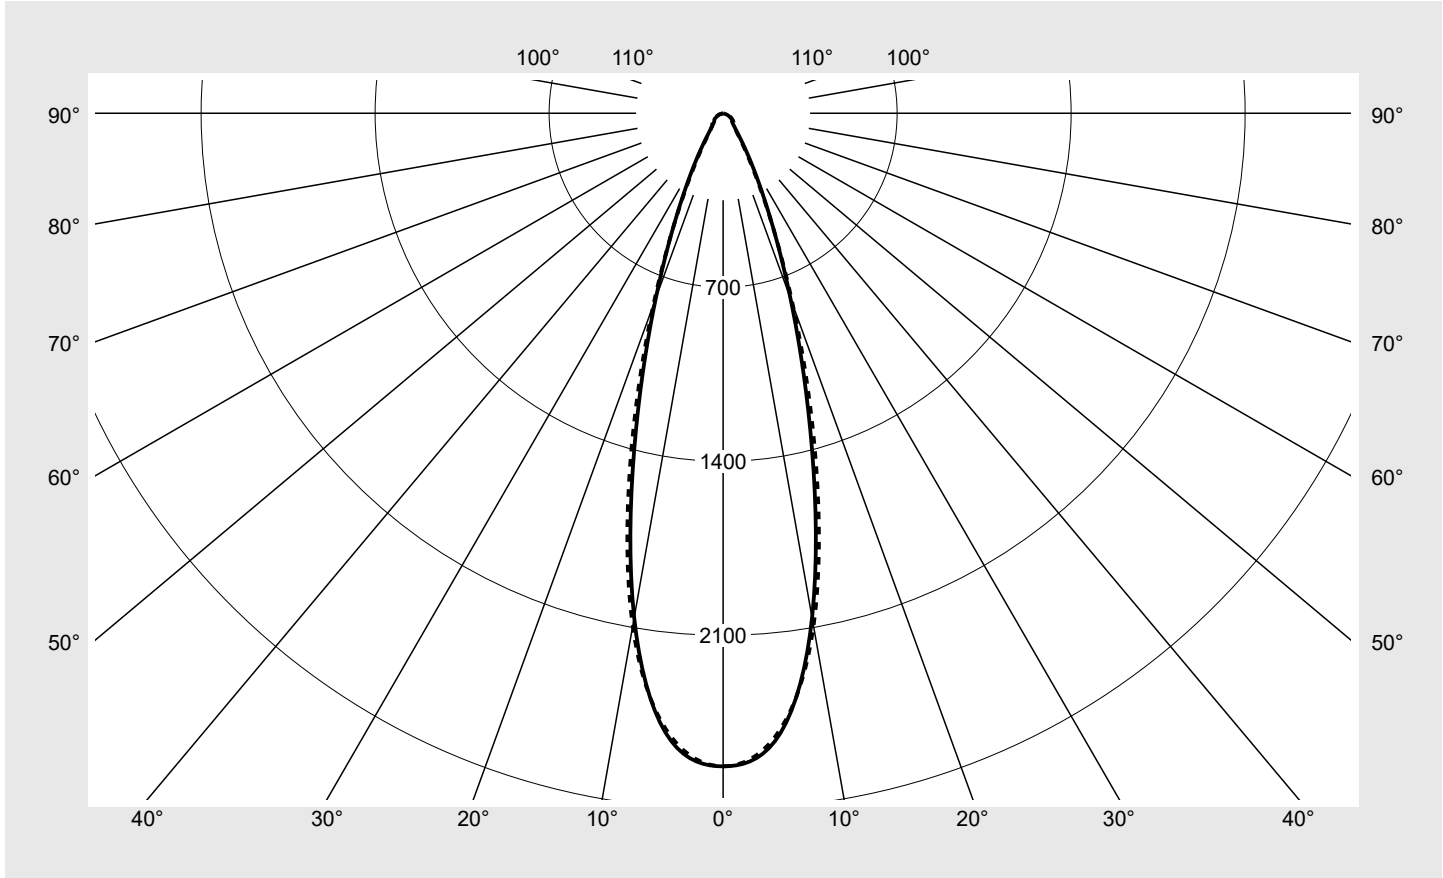


Photometric test report

Family Licross® 11 Recessed	Order number: 51TL11DE45XG EAN: 4058352929483	LP number 58785_319
	Version cover frosted, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 5040 lm Power consumption = 29.6 W Luminous efficacy = 170.3 lm/W	serial documentation 21.09.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 2627 cd/klm**



Classifications	
DIN 5040	A 7 0
CIE	N1=89 N2=96 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL11DE45XG EAN: 4058352929483	LP number 58785_319
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	15.7	15.7
5°	2520.2	2503.8	2487.8	2499.1	2508.6	2505.8	2505.2	119.6	135.3
10°	2060.7	2047.7	2044.6	2066.8	2086.2	2092.0	2094.5	196.9	332.2
15°	1373.4	1369.0	1375.7	1399.2	1421.9	1432.7	1437.2	198.7	530.9
20°	791.8	790.8	796.4	808.8	818.0	819.0	819.4	151.2	682.1
25°	418.1	420.5	425.4	427.2	423.4	413.4	409.3	97.4	779.6
30°	215.7	218.7	224.8	222.9	213.7	202.3	197.8	58.9	838.4
35°	112.4	114.3	119.3	116.0	107.4	103.1	102.4	35.0	873.4
40°	70.3	69.7	69.6	67.8	65.2	68.3	71.3	24.2	897.6
45°	52.4	50.5	46.9	47.4	48.4	54.1	61.4	19.6	917.2
50°	46.4	44.6	38.1	38.0	38.3	44.7	54.3	17.8	935.0
55°	42.3	42.2	36.7	33.4	32.3	38.6	47.1	17.1	952.1
60°	32.7	32.9	34.3	30.2	28.0	32.6	38.2	15.3	967.4
65°	23.6	23.8	26.4	25.7	24.0	26.1	29.3	12.6	980.0
70°	15.1	15.6	18.2	19.4	18.6	19.5	20.9	9.4	989.4
75°	8.3	8.7	10.8	13.0	12.9	13.2	13.7	6.1	995.5
80°	4.0	4.1	5.0	6.6	7.3	7.2	7.2	3.2	998.7
85°	1.6	1.6	1.9	2.5	2.6	2.7	2.5	1.2	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL11DE45XG EAN: 4058352929483	LP number 58785_319
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.4	16.5	15.7	16.8	17.1	15.3	16.4	15.7	16.7	17.1
	3H	16.3	17.3	16.7	17.6	18.0	16.7	17.7	17.1	18.0	18.4
	4H	16.5	17.4	16.9	17.8	18.2	17.2	18.1	17.6	18.5	18.9
	6H	16.7	17.4	17.1	17.8	18.2	17.6	18.4	18.0	18.7	19.1
	8H	16.7	17.4	17.2	17.8	18.2	17.8	18.4	18.2	18.8	19.2
	12H	16.7	17.3	17.2	17.7	18.1	17.8	18.4	18.2	18.8	19.2
4H	2H	15.9	16.8	16.3	17.1	17.5	15.8	16.7	16.2	17.1	17.4
	3H	17.0	17.8	17.4	18.2	18.6	17.4	18.1	17.8	18.5	18.9
	4H	17.3	18.0	17.7	18.4	18.8	18.0	18.6	18.4	19.0	19.5
	6H	17.5	18.0	17.9	18.4	18.9	18.4	18.9	18.9	19.4	19.9
	8H	17.5	17.9	18.0	18.4	18.9	18.5	19.0	19.0	19.5	19.9
	12H	17.5	17.9	18.0	18.4	18.9	18.6	19.0	19.1	19.4	19.9
8H	4H	17.6	18.0	18.0	18.5	19.0	18.2	18.6	18.6	19.1	19.6
	6H	17.7	18.1	18.2	18.6	19.1	18.7	19.1	19.2	19.5	20.1
	8H	17.8	18.1	18.3	18.6	19.1	18.8	19.2	19.3	19.7	20.2
	12H	17.8	18.1	18.3	18.6	19.1	18.9	19.2	19.5	19.7	20.3
12H	4H	17.6	18.0	18.1	18.4	18.9	18.2	18.6	18.7	19.0	19.5
	6H	17.8	18.1	18.3	18.6	19.1	18.7	19.0	19.2	19.5	20.0
	8H	17.8	18.1	18.4	18.6	19.2	18.9	19.1	19.4	19.6	20.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 750 B = 58
------------------------	---	--------------------------------------	---------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		8592.2	8269.7	7682.6	7760.3	7924.6	8871.9	10059.8	
50°		8369.0	8041.8	6859.9	6856.0	6899.9	8063.3	9781.6	
55°		8551.4	8527.4	7412.8	6740.5	6532.3	7799.0	9505.3	
60°		7573.7	7620.0	7946.7	7001.5	6482.7	7542.9	8850.5	
65°		6457.9	6530.1	7237.4	7055.9	6583.2	7153.7	8020.1	
70°		5118.3	5275.1	6182.0	6558.4	6314.4	6607.1	7082.1	
75°		3729.0	3902.7	4832.0	5820.9	5783.7	5898.8	6126.2	
80°		2636.9	2730.9	3354.1	4395.0	4862.7	4781.3	4822.0	
85°		2150.9	2181.5	2545.7	3300.8	3488.3	3569.4	3271.6	

Photometric test report


Family
Licross® 11 Recessed

Order number: 51TL11DE45XG
EAN: 4058352929483

LP number
58785_319

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

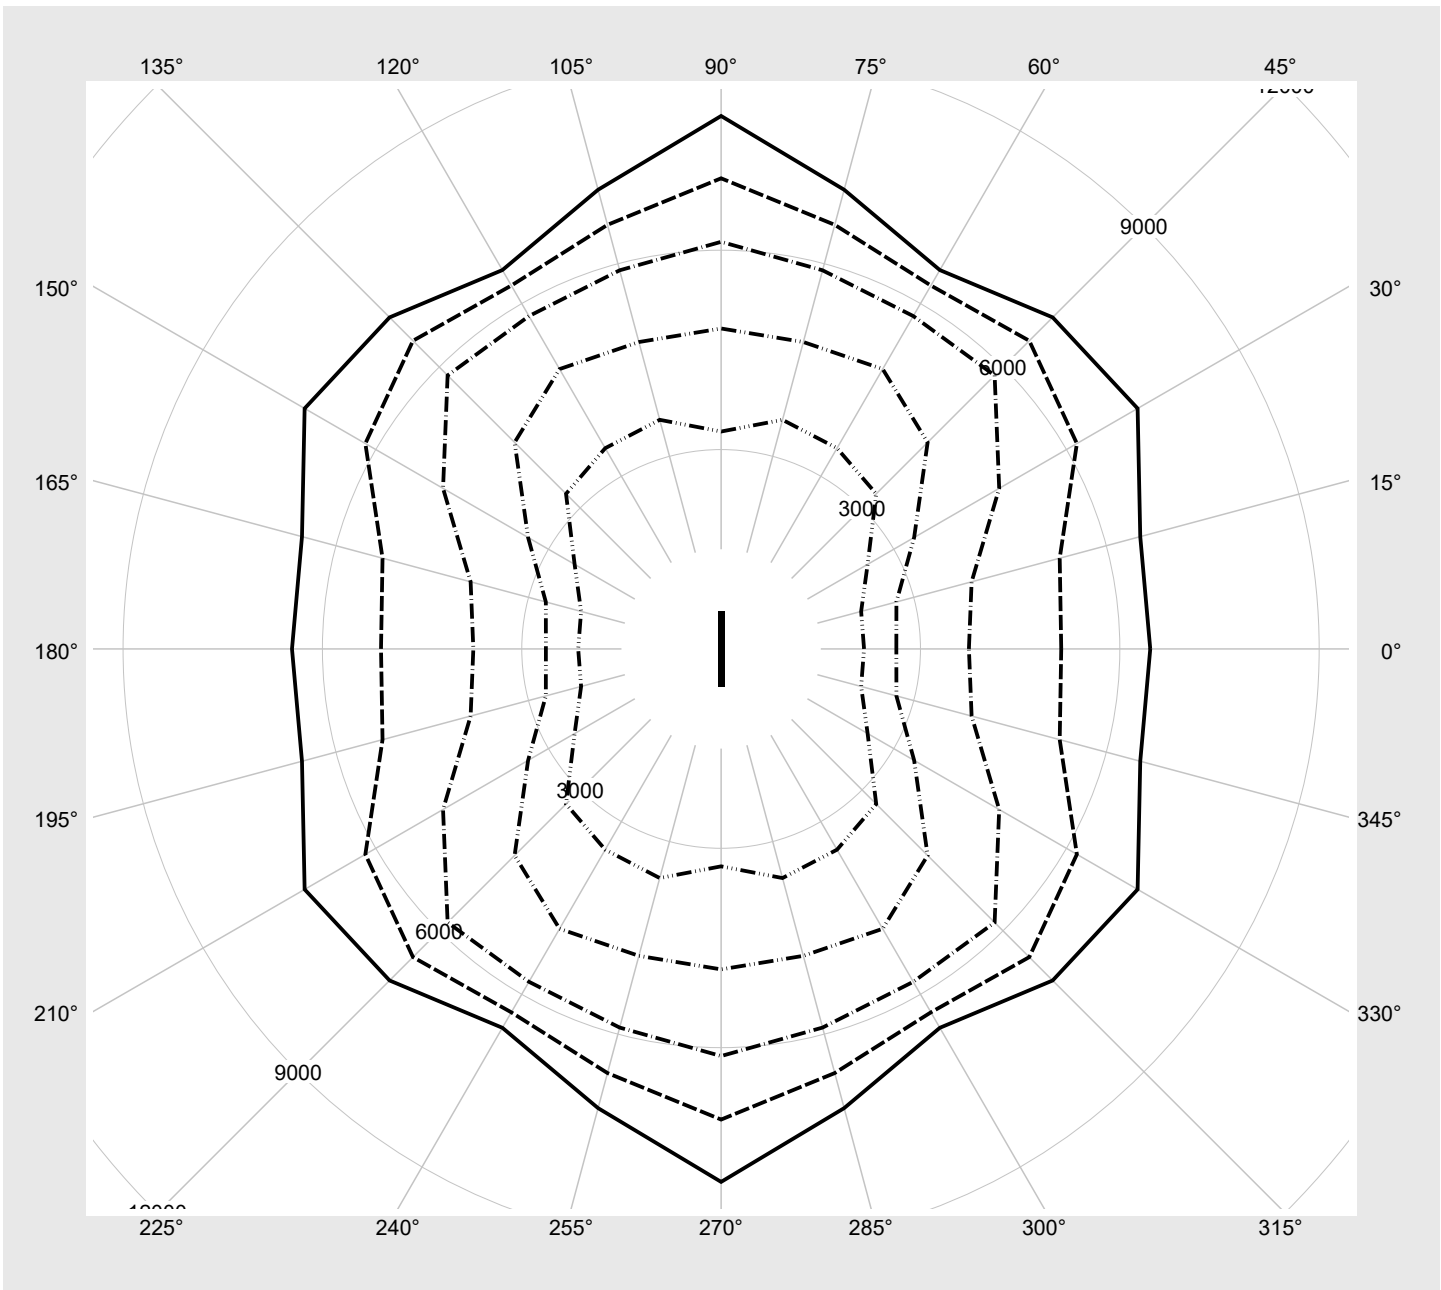

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL11DE45XG EAN: 4058352929483	LP number 58785_319
---------------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5040	29.6
95	240	252	4786	28.0
90	226	250	4527	26.3
85	213	248	4286	24.8
80	199	245	4024	23.2
75	186	243	3778	21.7
70	173	240	3530	20.1
65	160	237	3280	18.6
60	147	234	3028	17.1
55	134	231	2771	15.6
50	121	227	2513	14.3
45	109	223	2273	13.1
40	96	218	2010	11.7
35	84	213	1767	10.4
30	72	208	1520	9.1
25	60	201	1270	7.7
20	47	192	999	6.1
15	35	181	747	4.8
10	24	168	513	3.4
8	18	157	383	2.7