




Photometric test report

Family Licross® 11 Recessed	Order number: 51TL19MN495G EAN: 4058352940839	LP number 58532_420
	Version cover frosted, double asymmetric distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 9850 lm Power consumption = 55.2 W Luminous efficacy = 178.5 lm/W	serial documentation 11.10.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 703 cd/klm**

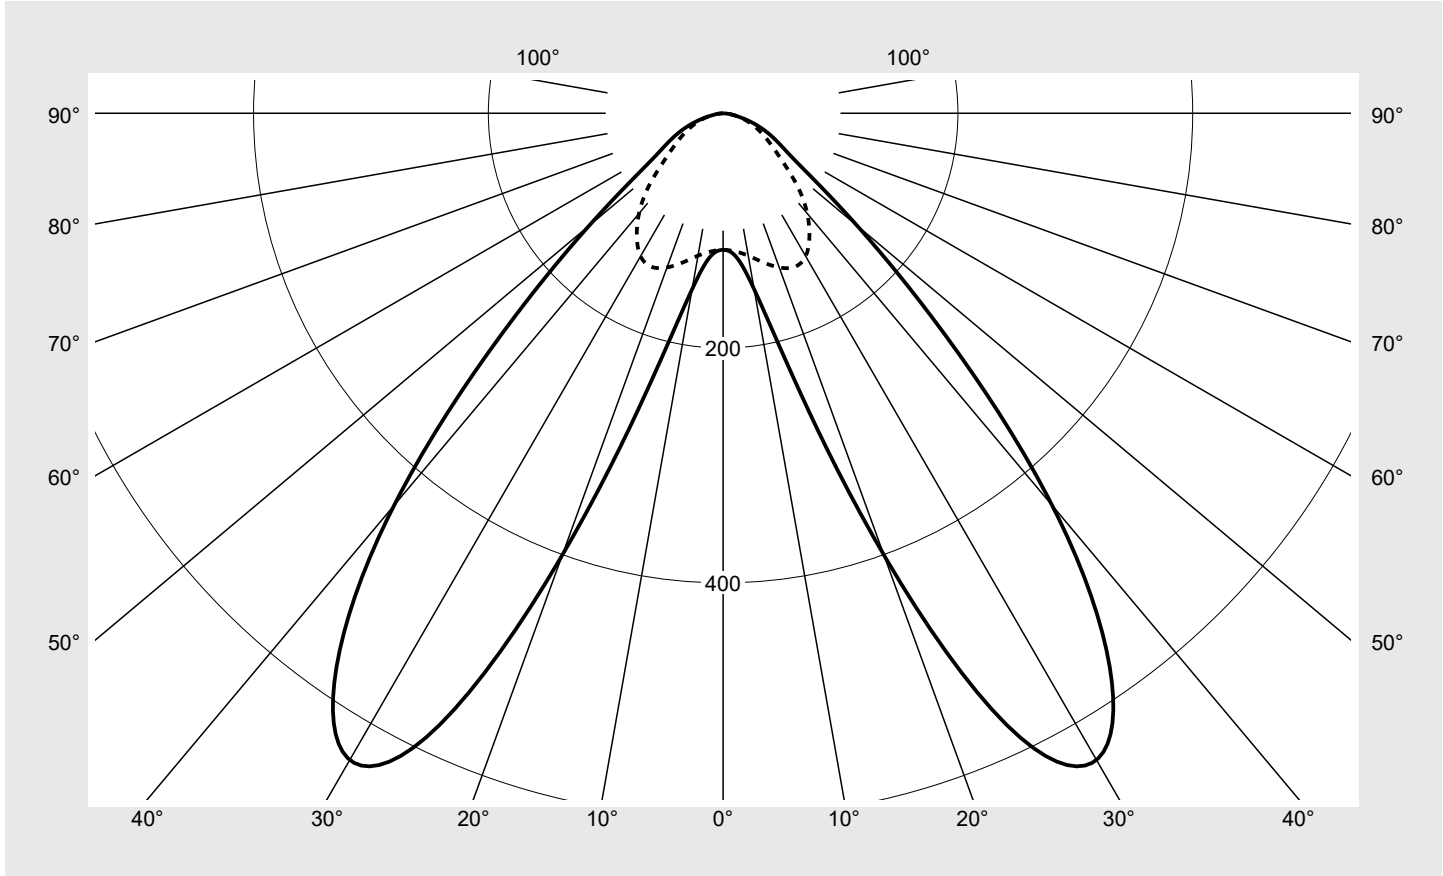

Classifications	
DIN 5040	A 4 0
CIE	N1=55 N2=89 N3=98 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL19MN495G EAN: 4058352940839	LP number 58532_420
---------------------------------------	--	-------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes γ	0° 180°	15° 165° 195° 345°	Luminous intensity in cd/klm					90° 270°	Phi-zone	Total Phi-zone
			30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	Luminous flux in lm/klm			
0°	116.4	116.4	116.4	116.4	116.4	116.4	116.4	116.4	0.7	0.7
5°	122.3	121.8	120.5	120.1	119.3	118.4	118.1	118.1	5.7	6.4
10°	152.3	149.6	141.1	133.1	127.4	124.1	123.2	123.2	12.9	19.3
15°	235.7	226.2	196.7	164.2	142.2	133.3	131.4	131.4	24.7	44.1
20°	400.4	377.8	306.4	227.1	167.8	143.8	139.7	139.7	46.6	90.7
25°	577.7	557.7	476.8	343.4	212.9	153.0	144.3	144.3	81.3	172.0
30°	636.1	636.8	610.4	517.3	280.0	157.9	140.6	140.6	118.3	290.3
35°	573.7	597.7	662.3	665.7	347.9	155.6	128.2	128.2	145.7	436.0
40°	436.2	470.5	613.4	703.5	376.1	144.6	111.4	111.4	151.6	587.6
45°	268.7	299.8	459.0	605.2	334.0	122.5	91.2	91.2	129.2	716.8
50°	149.1	168.3	276.5	419.8	259.3	97.4	69.0	69.0	93.1	809.9
55°	85.3	95.5	151.2	245.9	199.7	79.3	53.1	53.1	62.9	872.9
60°	59.3	63.7	88.0	138.5	152.7	65.0	42.1	42.1	44.2	917.1
65°	44.9	47.0	60.8	84.9	110.7	51.4	33.0	33.0	32.6	949.7
70°	31.7	33.1	42.5	56.3	76.3	38.4	24.7	24.7	23.6	973.3
75°	19.0	20.1	26.0	34.9	49.6	26.3	17.0	17.0	15.4	988.7
80°	8.8	9.4	12.7	18.2	27.0	15.2	9.8	9.8	8.3	997.0
85°	3.4	3.6	4.7	6.8	9.5	5.9	3.7	3.7	3.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL19MN495G EAN: 4058352940839	LP number 58532_420
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	25.1	26.7	25.5	27.0	27.4	23.9	25.6	24.3	25.9	26.2
	3H	25.3	26.7	25.6	27.0	27.4	24.2	25.7	24.6	26.0	26.3
	4H	25.3	26.7	25.7	27.0	27.4	24.3	25.7	24.7	26.0	26.4
	6H	25.3	26.5	25.7	26.9	27.3	24.3	25.6	24.7	26.0	26.4
	8H	25.4	26.5	25.8	26.9	27.3	24.3	25.5	24.7	25.9	26.3
	12H	25.3	26.4	25.8	26.8	27.2	24.3	25.5	24.7	25.9	26.3
4H	2H	25.5	26.9	25.9	27.2	27.6	24.6	26.0	25.0	26.3	26.7
	3H	25.8	26.9	26.2	27.3	27.7	25.4	26.5	25.8	26.9	27.3
	4H	25.9	26.9	26.3	27.3	27.7	25.6	26.6	26.0	27.0	27.5
	6H	25.9	26.8	26.4	27.2	27.7	25.7	26.6	26.2	27.0	27.5
	8H	25.9	26.7	26.4	27.1	27.6	25.7	26.6	26.2	27.0	27.5
	12H	25.9	26.6	26.4	27.1	27.6	25.7	26.5	26.2	26.9	27.4
8H	4H	26.0	26.8	26.5	27.3	27.7	25.8	26.6	26.3	27.1	27.5
	6H	26.1	26.8	26.6	27.2	27.7	26.1	26.8	26.6	27.2	27.7
	8H	26.1	26.7	26.6	27.2	27.7	26.2	26.8	26.7	27.3	27.8
	12H	26.1	26.6	26.6	27.1	27.6	26.2	26.7	26.7	27.2	27.8
12H	4H	26.0	26.8	26.5	27.2	27.7	25.8	26.5	26.3	27.0	27.5
	6H	26.1	26.7	26.6	27.2	27.7	26.1	26.7	26.6	27.2	27.7
	8H	26.1	26.7	26.7	27.2	27.7	26.3	26.7	26.8	27.2	27.8

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500
			B = 58


C-planes	γ	Luminance in cd/m ²						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		43017.3	47995.9	73495.0	96896.3	53473.3	19616.0	14600.2
50°		26255.8	29650.5	48706.3	73936.5	45675.7	17158.5	12149.4
55°		16845.1	18849.6	29849.2	48543.6	39417.6	15644.2	10474.1
60°		13426.3	14434.9	19928.5	31354.0	34571.2	14729.0	9534.1
65°		12027.0	12604.0	16288.7	22747.4	29661.9	13762.4	8829.1
70°		10506.8	10954.1	14080.6	18620.7	25268.7	12719.8	8170.8
75°		8314.0	8801.8	11384.4	15274.2	21706.8	11513.0	7432.6
80°		5729.1	6096.8	8276.5	11881.4	17598.7	9922.1	6412.4
85°		4477.8	4671.3	6050.9	8771.1	12401.9	7609.7	4863.6

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL19MN495G EAN: 4058352940839	LP number 58532_420
--	--	--------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

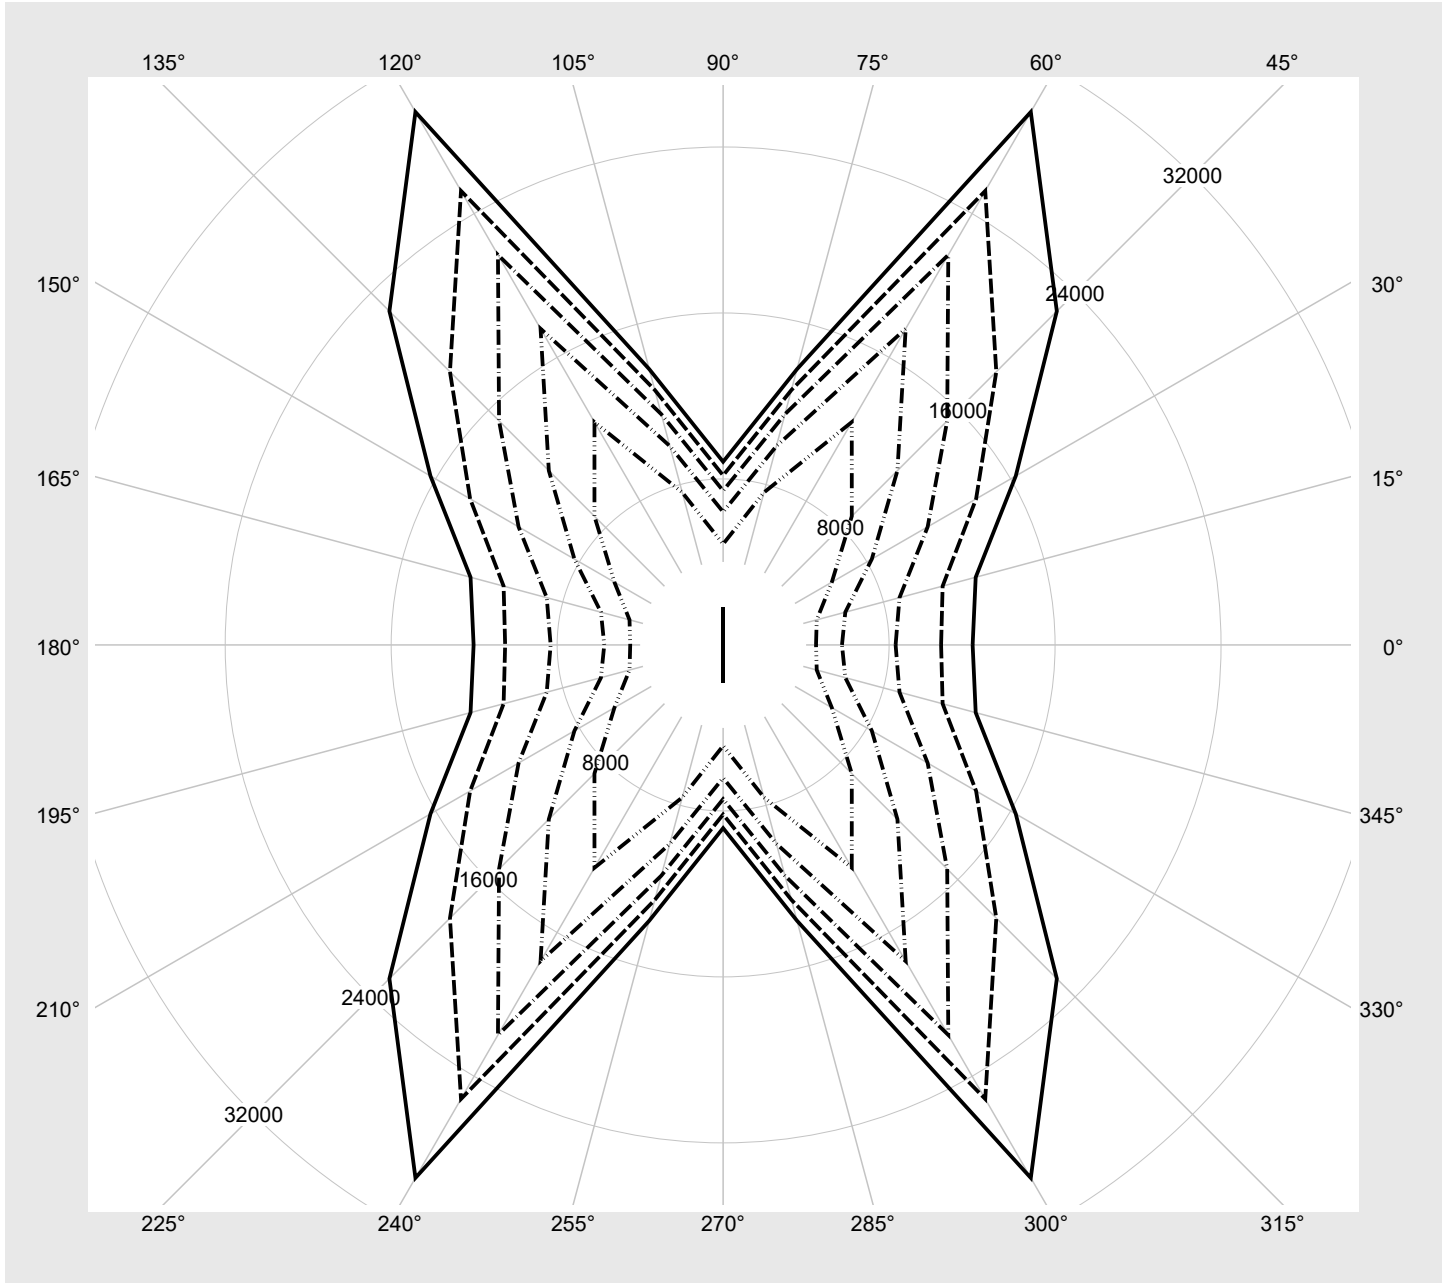

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL19MN495G
EAN: 4058352940839

LP number
58532_420

Multilumen Table

environmental temperature: 25°C

siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	9850	55.2
2	A	C	F	9420	52.5
3	A	D	E	8910	49.3
4	A	D	F	8400	46.2
5	B	C	E	7660	41.7
6	B	C	F	7440	40.4
7	B	D	E	6910	37.4
8	B	D	F	6460	34.8