

Photometric test report

Family CITY-LIGHT PLUS LED



Order number: 5XA5275EU14H000022
EAN: 4069025025753

LP number
57130_76

serial
documentation
11.10.2023

Version post-top- or mounting to wall arm, Smart Interface down
Optic direct, symmetric wide distribution S120011
Cover cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear EVG SITECO iQ - Smart Interface
Rated values Net luminous flux = 1460 lm
 Power consumption = 10.7 W
 Luminous efficacy = 136.5 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 814 cd/klm

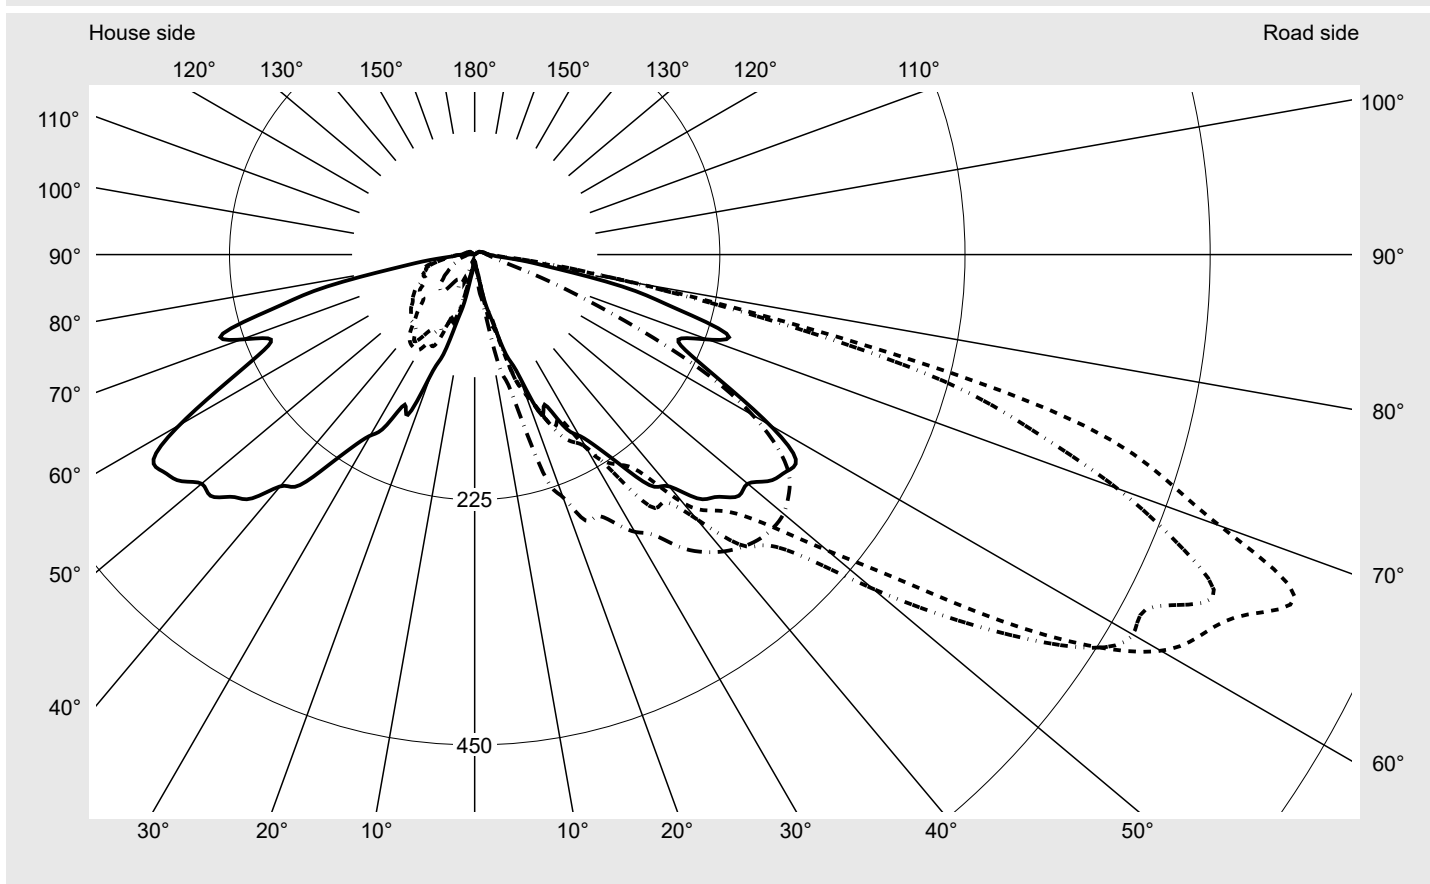

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.4%
Eta 90° - 180°	2.6%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	727.6
Imax 80°	157.2
Imax 90°	13.4
Imax >90°	12.4
Imax >95°	10.3

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
CITY-LIGHT PLUS LED

Order number: **5XA5275EU14H000022**
EAN: **4069025025753**

LP number
57130_76

Envelope curve in cd/klm


KMK 67.5°

KMK 65°

KMK 62.5°

KMK 60°

siteco

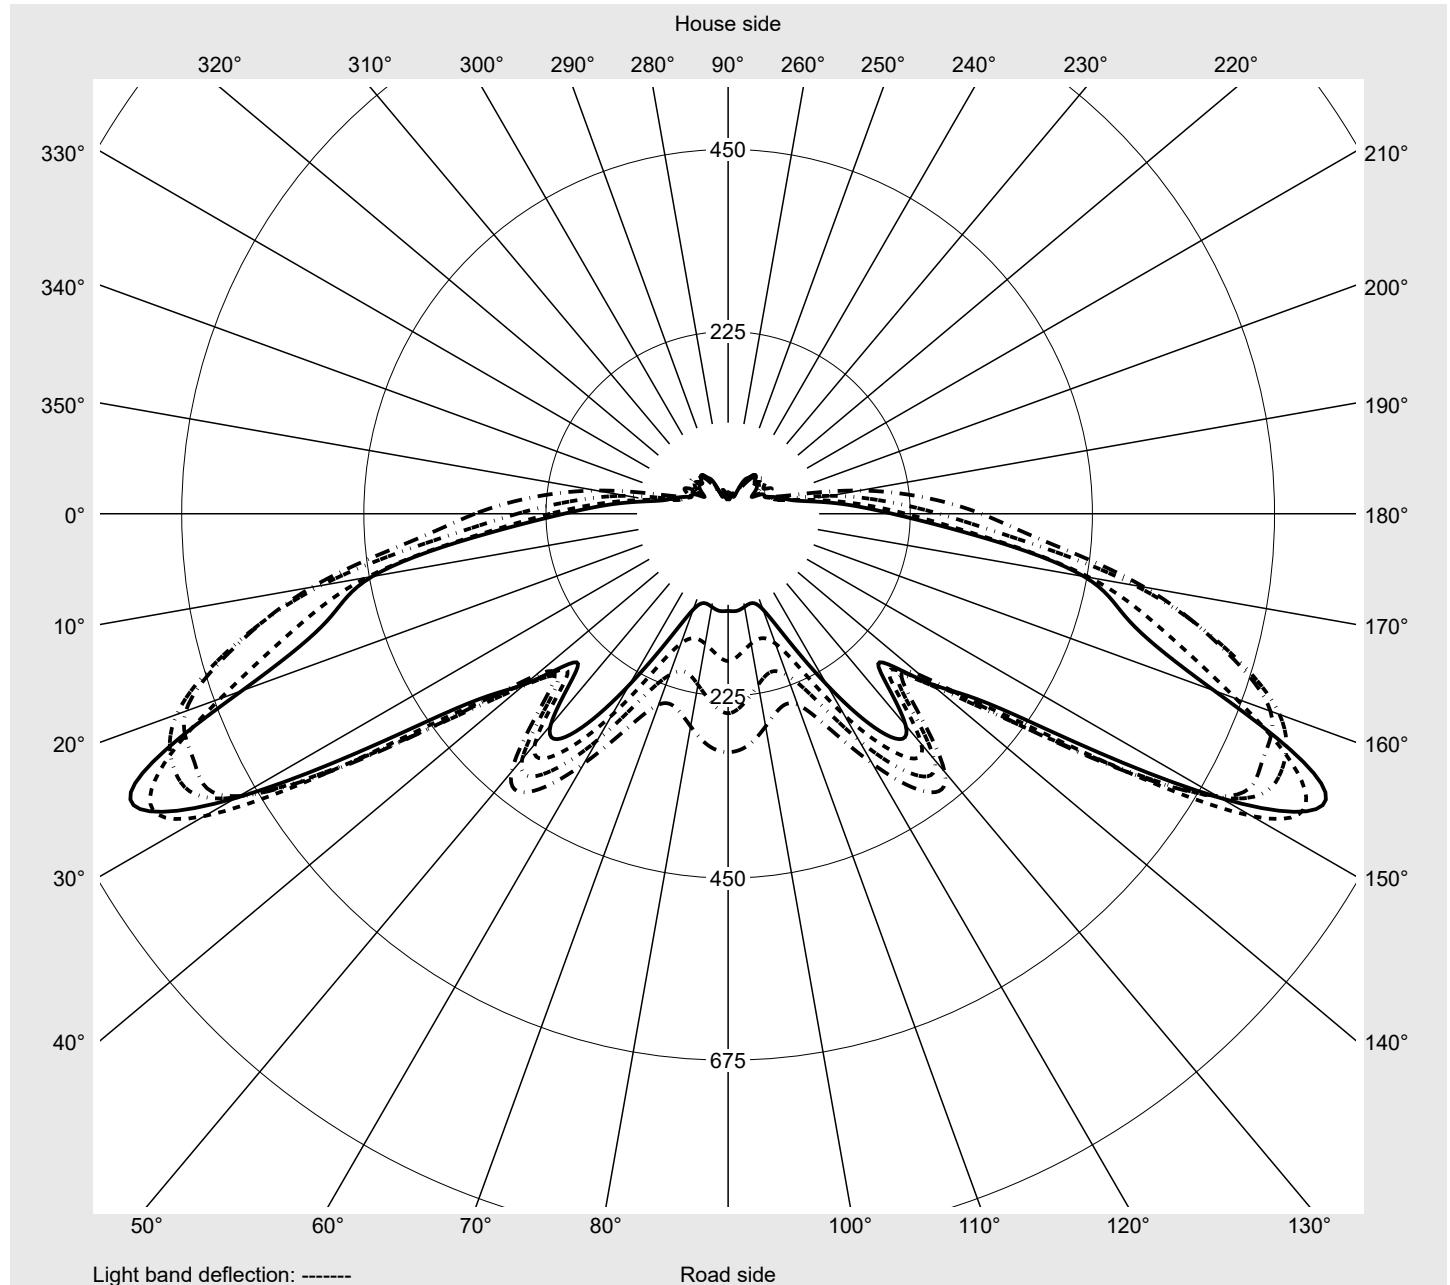

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275EU14H000022 EAN: 4069025025753	LP number 57130_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
2,5°	6.9	6.9	6.9	6.9	7.2	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
5,0°	7.9	8.2	8.2	8.9	9.3	10.0	10.0	10.3	10.6	11.0	11.7	12.7	13.4
7,5°	16.5	19.2	20.3	19.6	17.8	15.8	14.4	14.1	15.8	18.2	21.3	25.7	29.5
10,0°	24.7	23.7	24.7	26.8	24.4	21.6	17.5	17.2	24.7	36.0	45.3	49.8	46.7
12,5°	47.4	52.5	58.0	59.7	67.3	63.2	52.5	49.1	59.4	67.6	70.0	71.0	72.4
15,0°	65.2	66.6	67.6	70.4	78.9	71.7	59.7	52.2	64.9	85.5	107.4	108.5	116.4
17,5°	96.8	107.8	123.9	109.1	107.4	110.9	112.9	105.7	93.7	105.4	136.9	149.6	150.0
20,0°	116.7	112.2	152.0	127.7	143.1	136.3	134.2	126.3	103.3	122.9	157.9	160.3	174.0
22,5°	158.6	162.3	185.7	176.1	163.7	156.5	155.1	143.1	115.7	129.1	172.6	182.9	206.6
25,0°	152.0	153.1	177.8	189.8	186.0	174.4	179.9	182.3	123.6	144.2	182.6	188.1	226.2
27,5°	178.1	167.5	188.8	190.8	181.9	170.2	193.6	207.0	127.0	163.4	205.2	200.4	242.7
30,0°	191.9	196.0	216.9	229.6	216.6	205.6	203.9	213.8	137.3	186.0	244.4	224.1	256.7
32,5°	210.1	204.2	226.9	244.4	241.6	226.2	237.5	245.8	151.4	216.9	281.8	263.6	281.8
35,0°	238.2	229.6	243.0	254.7	237.2	235.8	282.8	290.0	164.1	229.3	310.3	300.7	313.4
37,5°	268.1	268.1	281.4	290.0	273.2	254.0	286.3	289.0	173.3	260.5	327.4	339.8	352.8
40,0°	277.7	278.0	282.1	307.2	303.4	297.6	316.8	312.3	188.1	297.6	353.9	356.6	384.4
42,5°	303.8	285.2	313.4	313.0	320.2	318.5	361.4	339.5	204.2	326.1	399.5	384.8	401.9
45,0°	314.4	305.1	341.2	341.5	345.6	335.0	377.2	370.3	221.4	339.5	427.3	407.8	412.6
47,5°	328.1	318.2	397.1	396.1	400.5	369.3	411.5	390.9	240.9	358.3	445.5	428.0	418.1
50,0°	327.1	339.5	435.6	440.0	452.4	422.5	477.1	435.2	255.0	363.5	447.9	432.8	415.6
52,5°	341.2	348.4	457.5	468.8	511.1	488.8	546.1	465.8	273.6	354.6	452.4	445.2	411.2
55,0°	348.0	370.3	458.2	509.7	574.6	582.1	613.0	491.2	296.9	347.3	442.8	446.5	399.9
57,5°	349.4	394.4	486.7	579.4	663.8	667.6	671.7	485.7	311.3	340.1	439.0	446.9	384.1
60,0°	312.7	393.7	522.0	628.8	712.9	727.3	697.4	486.7	311.0	315.1	416.0	417.7	356.3
62,5°	260.5	360.0	510.7	633.6	724.9	753.7	700.5	482.9	331.9	299.3	395.7	390.6	323.0
65,0°	219.7	314.4	453.4	556.0	667.6	781.9	746.9	465.8	326.4	280.8	371.4	360.0	287.6
67,5°	202.8	306.8	446.5	513.5	639.1	814.1	702.2	434.5	327.1	262.2	341.2	328.5	244.0
70,0°	227.9	334.0	444.5	502.5	606.5	727.6	627.8	370.0	293.5	220.7	302.0	290.0	202.8
72,5°	243.0	353.5	427.0	486.7	580.4	652.1	537.5	327.8	258.1	176.1	246.1	235.8	163.0
75,0°	191.2	298.6	370.0	416.7	509.7	538.5	441.0	228.6	168.5	86.5	181.9	193.2	141.1
77,5°	145.5	211.1	248.8	284.5	321.9	316.8	277.7	150.0	80.3	70.0	153.1	175.7	125.6
80,0°	81.7	93.0	127.7	154.5	157.2	148.3	145.2	68.0	48.7	52.2	79.3	87.9	55.3
82,5°	47.7	52.9	63.2	81.3	74.8	60.4	73.8	40.5	52.2	35.7	35.0	27.5	20.3
85,0°	22.7	24.4	29.9	31.9	25.7	28.5	33.6	18.5	27.5	19.9	14.8	15.4	15.1
87,5°	17.2	16.1	17.5	18.2	16.8	18.5	19.2	15.1	15.4	14.4	11.3	13.0	13.0
90,0°	11.7	11.3	12.7	13.4	13.0	12.7	12.4	11.7	10.3	8.9	9.6	11.0	11.7
92,5°	10.6	10.6	11.7	12.4	12.0	11.7	11.7	11.0	9.3	8.6	8.6	10.3	11.0
95,0°	10.0	10.0	10.6	11.3	11.0	10.6	10.3	10.0	8.9	7.9	8.2	9.6	10.3
97,5°	9.3	9.3	10.0	10.3	10.0	9.6	9.6	8.9	8.2	7.6	7.6	8.9	9.6
100,0°	8.6	8.6	9.3	9.3	9.3	8.9	8.9	8.6	7.9	7.2	7.2	8.2	8.9
102,5°	7.9	8.2	8.6	8.6	8.6	8.2	8.2	7.9	7.2	6.9	6.9	7.9	8.2
105,0°	7.6	7.9	7.9	8.2	7.9	7.6	7.6	7.2	6.9	6.9	6.9	7.6	7.6
107,5°	7.2	7.2	7.6	7.6	7.2	7.2	7.2	6.9	6.5	6.2	6.2	6.9	7.6
110,0°	6.5	6.9	7.2	6.9	6.9	6.5	6.5	6.2	6.2	6.2	6.2	6.2	6.9
112,5°	6.2	6.2	6.5	6.5	6.2	6.2	6.2	5.8	5.8	5.8	5.8	6.2	6.9

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275EU14H000022 EAN: 4069025025753	LP number 57130_76
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
2,5°	7.9	8.2	8.2	7.9	8.2	8.2	6.9	6.9	6.9	6.9	7.2	6.9	7.6
5,0°	13.7	14.1	13.7	14.1	13.7	13.7	7.9	7.9	7.9	7.9	7.6	7.6	7.6
7,5°	30.2	33.0	35.7	38.1	37.1	35.7	13.7	12.0	10.6	9.6	8.9	8.6	8.6
10,0°	40.8	45.0	58.3	59.0	54.2	50.8	26.4	29.2	27.8	23.0	17.8	13.4	11.0
12,5°	77.6	83.7	100.6	104.3	105.4	107.1	38.8	34.7	25.4	23.7	24.4	27.1	27.5
15,0°	127.7	106.7	99.5	125.3	133.5	131.8	64.2	60.8	55.9	66.9	57.0	49.4	47.4
17,5°	148.3	157.5	167.2	190.5	196.3	211.4	87.9	86.8	96.1	71.0	64.9	65.2	59.0
20,0°	190.5	194.3	199.8	209.7	232.7	236.8	117.7	113.6	100.9	85.5	60.4	62.1	58.7
22,5°	221.7	228.2	239.2	254.7	261.5	263.6	140.4	122.5	119.4	108.8	83.4	75.9	55.3
25,0°	252.3	255.7	255.7	258.1	263.3	265.0	135.2	130.8	127.3	115.7	92.7	74.1	55.9
27,5°	267.4	267.7	268.1	274.9	277.3	277.3	170.6	140.7	121.8	117.7	91.0	81.3	62.5
30,0°	296.2	294.1	288.3	288.3	291.1	293.8	176.8	157.9	136.6	123.9	100.6	80.0	58.3
32,5°	315.4	316.1	305.5	303.4	305.1	304.8	196.3	173.0	148.3	127.0	102.3	89.6	71.7
35,0°	338.4	340.8	327.8	318.5	321.9	327.4	212.5	177.1	152.0	133.5	101.3	96.8	86.8
37,5°	364.9	361.4	338.8	335.3	341.2	343.9	239.2	189.5	157.5	136.6	98.2	88.9	88.9
40,0°	381.0	366.2	350.1	348.4	352.5	355.6	249.5	201.5	165.4	133.2	91.6	85.8	90.3
42,5°	396.4	375.5	355.2	356.6	361.1	363.8	285.2	215.2	176.8	129.1	81.3	84.1	89.6
45,0°	411.5	382.7	361.1	362.8	366.6	369.3	304.8	231.0	174.4	117.7	74.1	83.4	89.6
47,5°	413.2	375.8	360.7	364.5	369.3	371.4	315.1	237.2	175.7	98.5	65.6	79.3	84.4
50,0°	399.5	365.9	355.9	361.1	367.6	370.0	309.9	239.2	168.9	84.4	61.4	76.2	77.9
52,5°	378.6	344.6	342.5	353.2	361.4	363.1	315.4	236.1	166.5	70.0	62.1	71.7	71.7
55,0°	351.8	319.5	321.6	334.3	347.3	352.2	309.9	233.4	151.4	68.6	61.1	69.3	66.2
57,5°	320.9	285.9	291.4	306.5	323.0	329.5	295.2	204.6	121.2	62.8	59.4	65.9	60.4
60,0°	290.7	250.9	248.5	266.7	286.9	294.5	239.6	165.1	94.4	61.8	53.9	62.1	53.9
62,5°	250.9	212.1	202.5	214.5	234.1	246.4	188.8	127.3	69.0	57.7	51.1	55.3	46.7
65,0°	211.1	170.6	159.3	163.0	173.7	181.9	153.1	99.2	65.2	56.6	49.8	52.5	40.8
67,5°	168.2	126.0	114.3	116.7	120.5	120.1	140.4	91.3	72.1	60.4	50.8	48.1	36.0
70,0°	138.3	97.8	76.9	73.8	76.5	76.9	155.8	99.2	79.3	62.1	49.8	45.3	31.9
72,5°	108.5	73.8	47.4	44.3	44.3	46.0	147.9	94.4	73.8	59.4	51.5	46.7	28.8
75,0°	86.5	54.2	35.4	31.2	29.9	29.5	99.5	72.8	60.8	50.5	48.4	45.3	28.5
77,5°	63.5	31.6	26.4	23.7	22.7	22.7	77.9	58.3	51.8	44.6	43.2	39.8	26.8
80,0°	32.3	20.6	19.9	19.2	18.5	18.5	55.3	47.0	44.6	39.5	35.7	33.0	24.7
82,5°	16.8	15.8	15.4	15.8	15.8	15.8	37.8	35.4	34.3	30.9	28.8	26.4	20.6
85,0°	14.1	13.7	14.1	14.1	13.7	13.7	22.0	24.0	26.8	27.1	24.0	21.6	18.9
87,5°	13.0	13.0	13.0	13.0	13.0	13.0	17.8	18.9	19.9	18.9	17.2	16.5	15.1
90,0°	11.7	11.7	11.7	11.7	11.7	11.7	12.0	12.0	11.7	11.3	11.0	10.6	10.0
92,5°	11.0	11.0	11.3	11.3	11.0	11.0	11.0	10.6	10.6	10.0	10.0	9.3	8.9
95,0°	10.3	10.3	10.6	10.3	10.3	10.3	10.0	10.0	9.3	9.3	8.6	8.2	7.9
97,5°	9.6	9.6	9.6	10.0	9.6	9.6	9.3	8.9	8.6	8.2	7.9	7.6	7.2
100,0°	8.9	9.3	9.6	9.3	8.9	8.9	8.6	8.2	7.9	7.9	7.2	6.9	6.5
102,5°	8.9	8.9	8.9	8.9	8.9	8.9	7.9	7.9	7.6	7.2	6.9	6.5	6.2
105,0°	8.2	8.2	8.2	8.2	8.2	8.2	7.2	7.2	6.9	6.5	6.2	6.2	5.8
107,5°	7.6	7.6	8.2	8.2	7.9	7.6	6.9	6.9	6.5	6.2	5.8	5.5	5.1
110,0°	7.6	7.6	7.6	7.6	7.6	6.9	6.5	6.2	6.2	5.8	5.5	5.1	4.8
112,5°	6.9	6.9	7.6	7.6	7.2	6.2	6.2	5.8	5.5	5.5	5.1	4.8	4.8

Photometric test report

Family CITY-LIGHT PLUS LED				Order number: 5XA5275EU14H000022 EAN: 4069025025753								LP number 57130_76		
Table of values for luminous intensities												Maximum luminous intensity		sīteco
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone	
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm		
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	0.0	0.0	
2,5°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.2	7.2	7.6	0.1	0.1	
5,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.2	7.2	7.6	0.2	0.3	
7,5°	8.2	8.2	8.2	8.2	8.2	8.2	8.2	7.6	7.6	7.2	7.6	0.6	0.9	
10,0°	9.6	9.3	8.9	8.9	8.9	8.9	8.2	7.9	7.6	7.2	7.6	1.2	2.1	
12,5°	23.3	17.5	12.0	10.0	9.3	9.3	8.6	7.9	7.2	7.2	7.6	2.7	4.8	
15,0°	34.0	34.3	29.9	26.1	17.2	11.3	10.3	8.9	7.9	7.6	7.6	4.5	9.3	
17,5°	42.6	32.3	25.1	22.3	20.9	20.3	15.1	14.1	13.0	9.3	8.9	7.4	16.7	
20,0°	45.6	36.0	28.8	26.4	27.8	17.5	12.4	16.5	23.3	25.7	26.8	9.9	26.5	
22,5°	41.2	31.2	26.8	26.8	26.8	20.9	15.8	24.4	26.1	22.3	22.7	12.9	39.4	
25,0°	39.1	29.9	25.7	23.7	25.1	21.6	18.5	26.8	30.5	32.6	33.0	15.1	54.5	
27,5°	42.2	33.3	26.8	27.8	28.8	25.7	25.7	28.8	27.1	29.2	30.9	17.6	72.1	
30,0°	43.6	38.8	33.3	30.9	27.8	25.7	27.8	33.0	29.9	28.8	28.8	20.9	93.1	
32,5°	62.5	54.2	40.5	34.7	31.6	29.2	27.1	31.2	28.5	27.5	28.1	24.6	117.7	
35,0°	83.4	70.4	57.3	50.5	43.9	36.0	27.8	35.0	31.2	27.8	28.1	28.7	146.4	
37,5°	87.5	76.5	65.6	59.0	48.7	37.4	32.6	41.9	38.1	34.3	34.3	33.0	179.4	
40,0°	87.2	75.9	65.6	60.1	50.8	39.5	35.0	47.4	46.3	43.2	43.9	36.8	216.2	
42,5°	87.9	75.9	66.2	62.8	53.2	42.6	37.1	48.4	47.4	44.6	45.3	40.9	257.1	
45,0°	88.2	76.9	67.6	63.5	53.9	43.2	37.4	47.4	46.7	42.9	44.6	44.5	301.7	
47,5°	87.2	77.2	67.3	63.8	52.9	43.2	36.7	45.6	45.3	41.5	42.6	48.3	350.0	
50,0°	81.3	74.1	65.2	63.2	51.1	41.9	35.7	42.6	42.6	38.1	40.5	51.6	401.6	
52,5°	77.6	72.8	64.2	62.1	49.8	40.2	34.3	39.1	38.8	35.0	36.4	54.7	456.3	
55,0°	72.4	70.4	62.8	59.4	47.7	36.7	31.9	36.0	35.4	30.9	33.6	57.3	513.7	
57,5°	67.6	67.6	61.4	56.6	46.0	34.7	29.9	33.0	31.9	27.8	29.5	59.4	573.1	
60,0°	59.7	61.4	57.3	55.3	45.0	33.3	27.5	29.5	29.2	24.4	26.8	59.1	632.1	
62,5°	53.5	55.6	52.9	58.3	47.0	37.8	25.7	27.5	26.4	22.0	22.7	56.9	689.0	
65,0°	47.7	52.5	49.4	58.0	50.8	40.5	25.1	25.4	24.4	19.6	22.0	53.3	742.3	
67,5°	43.9	49.8	50.8	58.0	51.8	43.9	24.0	23.7	22.0	17.8	18.5	50.4	792.7	
70,0°	40.5	43.6	48.7	54.6	49.8	39.1	25.7	22.0	19.9	16.1	17.8	46.8	839.5	
72,5°	35.0	40.5	44.6	51.5	48.4	34.3	27.5	20.9	17.5	14.4	15.8	42.7	882.2	
75,0°	32.6	37.4	37.1	41.9	35.4	24.7	22.7	18.5	15.4	12.4	13.7	34.6	916.8	
77,5°	27.5	29.5	27.8	31.6	23.0	18.5	16.1	15.8	13.4	11.0	11.7	24.6	941.3	
80,0°	22.7	19.6	17.5	21.6	18.2	18.2	15.4	14.1	11.0	9.3	9.6	14.0	955.4	
82,5°	17.8	14.8	13.4	15.8	15.1	16.1	14.1	12.7	10.0	8.6	8.2	8.4	963.7	
85,0°	14.1	11.3	9.6	12.4	12.4	13.4	11.7	11.0	8.6	7.2	7.6	5.0	968.8	
87,5°	11.7	9.3	7.9	10.0	10.3	10.6	9.6	9.6	7.6	6.9	6.9	3.8	972.6	
90,0°	8.2	6.2	5.5	8.2	8.6	8.2	7.9	7.9	6.5	5.5	5.5	2.8	975.4	
92,5°	7.6	5.8	4.8	6.9	6.9	6.9	6.5	6.5	5.1	4.8	4.8	2.5	977.9	
95,0°	6.5	5.1	4.5	5.5	5.8	5.8	5.5	5.5	4.8	4.5	4.1	2.3	980.2	
97,5°	6.2	4.8	4.1	4.8	5.5	5.1	4.8	4.8	4.5	4.1	4.1	2.1	982.4	
100,0°	5.8	4.8	4.1	4.8	4.8	4.8	4.8	4.8	4.1	4.1	4.1	2.0	984.3	
102,5°	5.5	4.8	4.1	4.8	4.8	4.1	4.1	4.1	4.1	3.8	4.1	1.8	986.2	
105,0°	5.1	4.5	4.1	4.1	4.1	4.1	4.1	4.1	4.1	3.4	3.4	1.7	987.9	
107,5°	4.8	4.1	3.8	3.8	4.1	3.8	3.8	3.8	3.4	3.4	3.4	1.6	989.5	
110,0°	4.8	4.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	1.5	990.9	
112,5°	4.1	4.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.1	2.7	1.4	992.3	

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275EU14H000022 EAN: 4069025025753	LP number 57130_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.8	6.2	6.2	6.2	5.8	5.8	5.5	5.5	5.5	5.5	5.8	6.2	6.2
117,5°	5.5	5.5	5.8	5.8	5.5	5.5	5.5	5.1	5.5	5.5	5.5	5.5	6.2
120,0°	4.8	5.1	5.5	5.5	5.1	5.1	4.8	4.8	5.1	5.1	5.5	5.5	5.5
122,5°	4.8	4.8	5.1	5.1	4.8	4.5	4.8	4.8	4.8	4.8	4.8	4.8	5.5
125,0°	4.1	3.8	4.1	3.8	3.8	3.8	3.8	3.8	3.8	4.1	4.1	4.1	4.1
127,5°	2.7	2.7	3.1	3.1	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
130,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.7	1.7	2.1	2.1
132,5°	2.1	2.1	2.1	1.7	1.7	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4
135,0°	1.4	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
140,0°	1.4	1.4	1.4	1.4	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
142,5°	1.4	1.4	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	1.4	1.4	1.0	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	1.0	1.0	1.0	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275EU14H000022 EAN: 4069025025753	LP number 57130_76 siteco
-------------------------------	--	-------------------------------------

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.9	6.9	6.9	6.9	6.5	4.1	5.8	5.5	5.1	5.1	4.8	4.8	4.5
117,5°	6.2	6.5	6.9	6.9	5.5	2.1	5.1	4.8	4.8	4.8	4.8	4.5	4.1
120,0°	6.2	6.2	6.2	6.2	4.8	2.1	4.8	4.8	4.8	4.5	4.1	4.1	4.1
122,5°	5.5	5.5	5.5	6.2	4.1	2.1	4.5	4.5	4.1	4.1	4.1	3.8	3.4
125,0°	4.1	4.8	4.8	4.8	3.1	1.4	3.8	3.8	3.4	3.4	3.4	3.1	3.1
127,5°	2.7	2.7	3.1	2.7	2.1	1.4	2.7	2.7	2.7	2.7	2.7	2.7	2.4
130,0°	2.1	2.1	2.1	2.1	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
132,5°	1.4	1.4	1.4	1.4	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	1.4	1.4	1.4	1.4	1.0	0.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
137,5°	1.4	1.4	1.4	1.0	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.7	1.4
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.4	1.4	1.4	1.4	1.4	1.4
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.1	4.1	3.4	3.1	3.4	2.7	2.7	3.1	2.7	2.7	2.7	1.3	993.6
117,5°	4.1	3.4	3.4	3.1	2.7	2.7	2.7	2.7	2.7	2.7	2.7	1.1	994.7
120,0°	4.1	3.4	3.4	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	1.1	995.8
122,5°	3.4	3.4	3.4	2.7	2.7	2.4	2.4	2.7	2.7	2.4	2.1	1.0	996.7
125,0°	2.7	2.7	2.7	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1	0.8	997.5
127,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	0.5	998.0
130,0°	2.1	2.1	2.1	2.1	1.7	1.7	2.1	1.7	1.7	1.4	1.4	0.4	998.4
132,5°	2.1	1.7	2.1	2.1	1.4	1.4	1.4	1.4	1.7	1.4	1.4	0.3	998.8
135,0°	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.1
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.3
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.5
142,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.7
145,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.9
147,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.0	1.4	1.4	0.2	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275EU14H000022 EAN: 4069025025753	LP number 57130_76
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	1460	10.7	11.1	10.9
95	241	252	1385	10.1	10.4	10.2
90	229	250	1316	9.6	9.9	9.8
85	216	248	1242	9.0	9.3	9.2
80	203	246	1167	8.5	8.8	8.6
75	190	243	1092	7.9	8.2	8.0
70	178	241	1023	7.5	7.7	7.6
65	165	238	948	6.9	7.2	7.0
60	152	235	874	6.6	6.7	6.6
55	140	232	805	6.1	6.3	6.2
50	127	229	730	5.6	5.8	5.7
45	114	225	655	5.2	5.3	5.2
40	102	221	586	4.7	4.8	4.8
35	89	216	512	4.2	4.4	4.3
30	76	210	437	3.8	3.9	3.8
25	63	203	362	3.3	3.4	3.4
20	51	195	293	2.7	2.8	2.8
17	42	188	241	2.2	2.3	2.2