

Photometric test report

Family Streetlight 11 midi LED

Order number: 5XC3E61G08ME
EAN: 4058352991770

LP number
58931_219



Version	post-top or side-entry mounting
Optic	direct, asymmetric, left wide distribution ZCL0001
Cover	transparent, PMMA
Lamps	LED 2700 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 13830 lm Power consumption = 123.9 W Luminous efficacy = 111.6 lm/W

serial
documentation
30.11.2023

siteco

Luminous intensity in cd/klm


C180-0

C270-90

C335-155

C340-160

Imax: 835 cd/klm

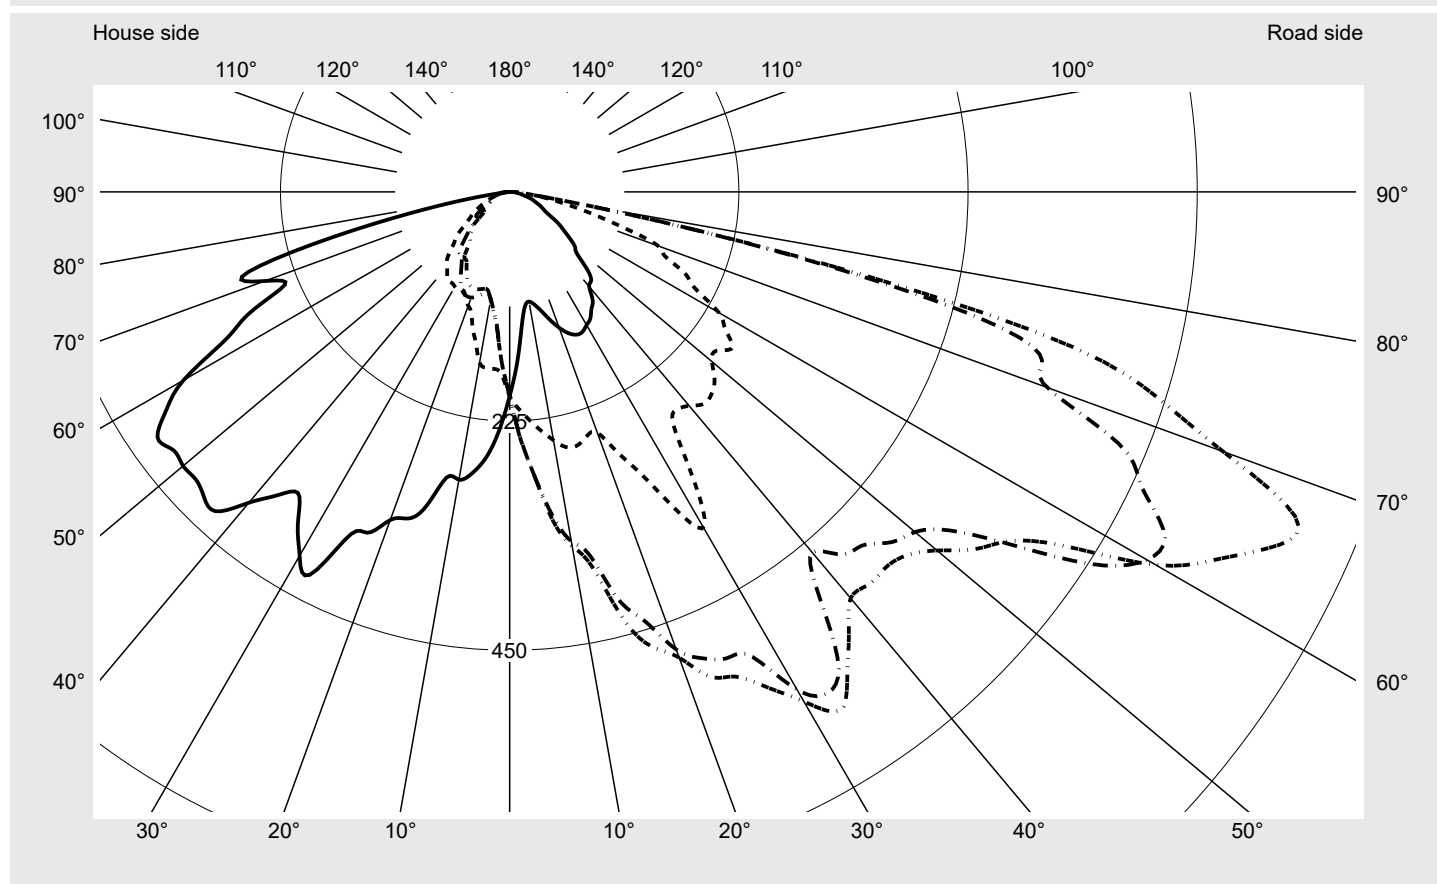

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 11 midi LED

Order number: **5XC3E61G08ME**
EAN: **4058352991770**

LP number
58931_219

Envelope curve in cd/klm


KMK 67.5°

KMK 65°

KMK 62.5°

KMK 60°

siteco

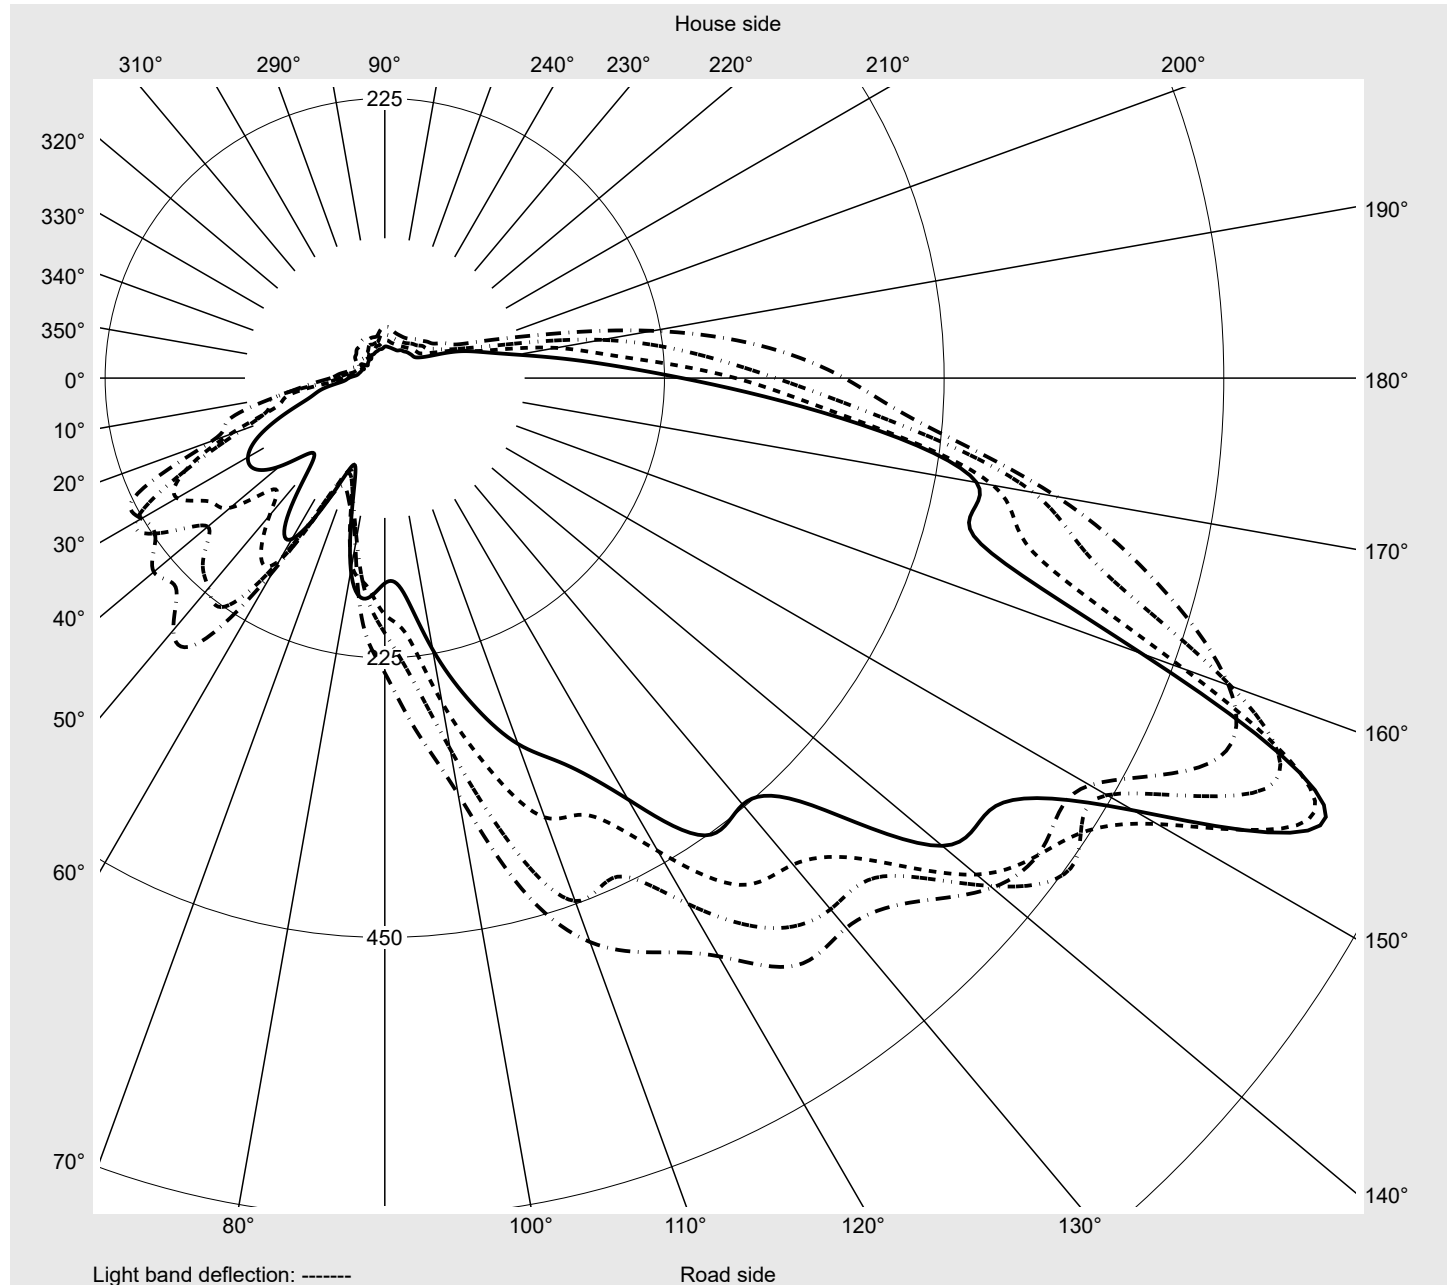

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E61G08ME EAN: 4058352991770	LP number 58931_219
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	167.9	169.0	171.2	173.5	176.5	179.4	180.8	181.8	182.8	184.5	186.5	188.6	190.4	192.8
5,0°	133.9	135.1	138.4	141.8	146.7	150.0	153.9	156.7	161.6	166.9	172.0	176.7	183.4	189.8
7,5°	113.9	115.9	118.8	121.2	125.9	129.4	131.8	134.7	139.8	144.7	150.8	160.2	172.4	177.5
10,0°	109.4	112.0	114.3	116.5	120.0	124.1	126.9	129.0	134.3	141.4	145.7	150.6	157.1	165.1
12,5°	113.7	117.5	119.8	122.4	124.7	127.9	128.1	131.0	132.2	136.9	142.0	153.7	159.8	166.9
15,0°	121.4	126.7	129.2	131.8	133.0	134.5	134.1	134.7	136.1	139.0	141.8	150.4	161.6	167.7
17,5°	131.8	138.6	142.0	144.9	145.5	145.7	143.0	142.2	142.2	144.1	149.4	152.8	156.9	164.3
20,0°	141.8	150.6	155.3	158.1	158.8	158.1	154.9	151.4	150.6	151.4	154.7	154.7	157.5	163.7
22,5°	150.0	161.0	166.9	171.0	172.8	171.8	168.3	162.8	159.4	158.3	157.7	155.1	156.9	164.5
25,0°	154.7	167.3	174.9	180.8	183.7	184.1	180.8	174.3	168.8	165.1	160.6	157.1	157.9	164.7
27,5°	154.9	170.4	180.2	186.5	190.2	192.0	191.0	185.9	180.2	173.0	165.7	160.8	155.9	158.6
30,0°	151.0	167.9	181.6	191.8	195.1	197.1	197.5	194.1	188.8	181.2	173.2	164.1	157.3	158.8
32,5°	147.3	163.2	176.5	188.6	201.8	207.7	204.7	202.6	198.5	191.0	179.8	169.6	159.4	154.3
35,0°	140.0	159.4	177.1	188.3	193.7	206.9	219.6	214.7	206.7	200.0	189.8	175.3	162.4	154.5
37,5°	133.9	149.0	164.3	181.0	199.0	202.2	211.6	227.5	217.5	207.9	196.9	181.6	165.7	154.1
40,0°	121.4	144.1	162.8	178.3	183.9	201.6	218.1	223.6	234.9	218.8	205.7	188.3	167.1	151.6
42,5°	118.4	136.7	150.0	167.9	191.4	199.0	210.0	228.7	235.9	238.3	209.8	192.8	165.5	149.6
45,0°	107.5	125.7	147.1	173.9	190.4	192.6	215.3	224.3	248.1	243.9	223.0	191.8	165.9	144.7
47,5°	89.4	110.4	143.5	160.2	175.5	191.6	211.4	231.0	241.4	260.2	232.6	194.7	162.6	141.6
50,0°	83.7	103.7	124.1	160.8	170.6	191.4	211.6	230.2	249.6	260.4	251.0	204.1	161.8	136.3
52,5°	73.7	99.8	119.0	155.9	201.4	184.3	197.9	232.8	248.3	261.2	270.6	224.7	170.6	129.2
55,0°	63.9	86.7	113.7	151.4	207.9	211.4	202.4	221.2	245.9	266.5	270.4	239.6	177.9	136.9
57,5°	54.9	70.0	100.8	141.6	194.7	242.8	208.5	216.7	251.4	256.1	276.3	253.8	177.3	123.9
60,0°	43.7	61.6	90.6	130.2	147.9	219.2	226.1	225.3	242.6	237.9	264.7	259.6	178.8	108.2
62,5°	37.8	51.2	90.4	96.9	123.0	178.6	231.6	216.5	185.9	206.7	220.8	224.5	169.6	100.8
65,0°	33.7	45.9	78.4	90.8	133.0	177.7	193.0	172.8	162.2	126.5	144.3	173.7	169.2	104.9
67,5°	29.2	34.9	51.2	63.7	86.9	112.6	127.1	127.5	110.6	85.5	93.9	136.9	149.6	109.4
70,0°	25.1	27.3	32.9	43.1	50.2	71.6	75.3	79.2	69.2	73.3	67.3	106.1	116.3	92.0
72,5°	21.6	23.1	25.1	26.5	29.6	34.9	49.6	49.8	55.3	58.6	47.1	63.7	63.9	64.7
75,0°	15.9	17.3	20.8	21.4	23.3	25.3	29.6	36.7	39.2	40.6	38.4	38.8	35.7	46.1
77,5°	12.7	13.7	15.7	16.9	18.4	19.8	22.9	23.5	25.5	26.9	29.0	29.0	29.0	24.9
80,0°	9.8	10.6	11.4	12.9	13.9	14.9	16.9	17.1	18.2	19.4	18.4	19.8	20.6	19.0
82,5°	7.3	7.8	8.6	9.2	10.0	10.8	11.8	12.0	12.7	12.9	12.9	13.5	12.7	13.3
85,0°	5.1	5.5	5.9	6.3	6.7	7.1	7.3	7.8	8.0	8.0	8.0	8.2	7.8	8.4
87,5°	2.4	2.7	2.7	2.9	3.1	3.3	3.3	3.5	3.5	3.7	3.7	3.7	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E61G08ME EAN: 4058352991770	LP number 58931_219
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	196.3	201.2	205.1	209.4	213.6	217.7	220.2	222.6	225.1	228.3	231.0	231.6	232.8	233.0
5,0°	197.7	207.7	214.1	221.2	225.1	230.8	237.5	248.1	261.8	272.0	279.2	286.1	290.2	294.5
7,5°	188.6	200.4	215.3	225.9	236.5	254.7	268.3	283.4	291.4	305.1	324.0	337.3	344.7	341.6
10,0°	181.0	195.7	210.8	228.3	247.5	265.1	294.3	318.7	346.3	370.4	380.4	382.2	387.1	392.6
12,5°	180.2	199.4	216.5	230.2	256.7	277.3	294.3	333.8	357.9	365.9	380.2	399.3	410.4	401.8
15,0°	178.8	196.9	220.8	241.8	257.5	272.0	302.6	323.4	347.5	372.4	387.3	405.1	418.1	426.9
17,5°	176.5	190.4	208.1	227.7	251.6	265.1	297.7	317.7	347.5	377.7	401.4	426.5	459.7	479.3
20,0°	171.8	192.0	212.4	242.2	251.6	282.6	323.0	328.7	367.1	404.0	449.1	469.5	491.2	502.6
22,5°	176.9	196.7	223.2	253.8	276.7	295.7	328.1	351.2	386.3	457.3	492.8	523.0	517.5	522.2
25,0°	173.2	194.7	231.6	270.6	305.9	317.9	341.0	386.3	430.8	472.4	517.7	540.3	552.4	558.7
27,5°	170.6	192.4	237.9	307.5	349.8	368.5	385.3	434.2	475.5	523.2	555.0	566.1	614.4	640.7
30,0°	164.5	183.2	227.9	291.0	380.6	377.3	411.6	476.5	518.7	534.2	565.4	601.8	647.9	649.5
32,5°	158.3	177.7	209.2	265.3	337.5	338.3	409.1	502.0	548.3	579.3	608.3	657.7	686.7	673.8
35,0°	154.9	167.9	187.3	235.3	280.8	327.3	418.7	514.6	594.0	635.8	669.3	716.7	733.4	719.9
37,5°	153.2	162.4	175.9	214.7	269.4	337.1	427.3	508.1	602.4	678.3	729.7	772.4	773.8	741.8
40,0°	147.5	158.1	169.4	202.4	274.3	351.8	456.3	540.1	627.3	693.2	736.9	783.8	768.9	792.2
42,5°	142.6	155.7	168.6	201.2	282.2	373.4	489.3	560.3	625.2	689.7	716.7	754.0	786.8	747.5
45,0°	138.6	149.8	165.7	206.1	280.4	372.4	494.4	555.9	648.9	678.5	729.5	741.1	764.8	757.7
47,5°	135.7	144.1	167.7	204.7	272.8	363.6	474.6	546.1	636.0	674.4	718.9	731.3	744.4	723.6
50,0°	130.0	137.9	169.6	212.8	259.2	340.6	447.3	513.8	596.1	666.5	687.5	716.2	718.5	679.5
52,5°	121.8	129.4	161.0	207.7	256.1	319.1	403.4	493.8	585.6	636.5	659.5	686.0	685.6	657.1
55,0°	114.7	124.5	163.2	222.0	266.7	305.5	382.6	485.3	576.9	597.1	625.4	632.4	641.6	628.3
57,5°	105.1	118.2	150.6	208.5	251.0	309.8	344.9	471.8	528.7	557.5	567.1	608.7	599.9	604.8
60,0°	93.5	107.5	136.5	199.4	237.1	283.8	340.0	425.3	482.8	509.7	537.1	576.9	577.5	596.9
62,5°	82.0	99.2	131.0	174.7	205.1	241.0	303.0	386.5	447.7	442.6	488.7	540.1	557.9	566.9
65,0°	79.0	104.1	152.6	167.7	190.2	208.1	264.9	326.1	376.1	388.1	439.3	497.7	511.0	547.7
67,5°	74.5	97.7	157.1	178.1	165.1	173.2	221.8	271.0	313.2	342.8	391.4	449.1	447.9	486.1
70,0°	73.9	83.3	127.1	166.1	155.3	146.5	179.4	226.9	255.1	291.0	324.2	392.2	401.0	436.5
72,5°	49.2	47.5	83.9	115.3	118.6	116.5	133.0	181.6	190.2	217.5	259.4	302.8	319.4	364.2
75,0°	29.6	31.4	44.3	67.1	85.1	92.6	107.5	128.4	129.2	162.4	216.7	273.2	266.7	250.4
77,5°	24.3	25.3	29.8	42.6	58.8	66.5	79.2	89.8	91.8	116.9	156.5	205.1	193.4	169.0
80,0°	19.0	20.6	21.4	27.1	38.0	43.7	54.9	61.4	64.7	68.4	86.7	98.5	77.7	98.5
82,5°	16.1	15.5	14.5	17.3	23.1	28.4	34.1	39.0	41.6	41.4	41.6	40.0	33.9	35.7
85,0°	10.0	8.4	7.1	8.8	11.6	15.3	17.8	20.0	22.0	21.4	18.8	16.5	14.3	12.7
87,5°	3.1	3.3	2.7	2.9	3.9	4.7	6.1	7.8	7.8	7.3	6.7	6.5	6.5	6.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E61G08ME EAN: 4058352991770	LP number 58931_219
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	235.3	237.7	241.0	242.8	241.6	240.8	237.3	234.9	234.1	227.3	224.3	222.0	219.2	215.1
5,0°	292.2	284.7	280.4	280.2	280.2	280.4	280.2	274.7	261.2	251.2	241.6	235.5	231.8	227.3
7,5°	337.7	334.2	330.8	325.7	320.2	312.2	296.7	285.5	278.1	269.8	260.4	249.4	243.0	238.1
10,0°	385.5	377.7	367.9	353.0	348.1	333.2	317.5	306.5	286.9	273.8	263.6	251.4	241.0	234.9
12,5°	396.5	397.1	389.1	378.3	366.3	341.4	325.9	311.6	287.5	272.0	258.5	244.3	234.1	226.1
15,0°	437.7	454.0	454.0	436.1	415.1	395.9	375.3	348.3	321.0	295.7	281.2	262.4	237.5	219.2
17,5°	496.7	492.8	490.4	468.7	442.0	420.2	394.9	373.0	336.3	298.3	277.9	262.4	241.6	222.0
20,0°	509.9	516.5	499.3	486.7	478.1	451.8	414.0	381.8	342.8	312.6	299.6	269.8	231.2	213.6
22,5°	523.0	528.3	527.7	515.2	495.7	462.8	420.0	388.5	362.2	323.2	287.5	267.9	236.3	212.2
25,0°	591.8	571.6	554.8	525.0	505.0	494.0	474.6	427.1	372.0	328.3	300.6	259.8	224.7	200.8
27,5°	634.2	613.0	576.5	548.5	514.0	496.1	493.6	473.2	423.4	358.5	306.3	262.4	231.8	203.9
30,0°	622.2	609.5	620.1	577.7	564.4	545.0	479.7	439.7	412.4	357.3	304.0	260.6	227.3	200.6
32,5°	661.1	654.6	636.5	603.4	582.8	557.3	500.6	449.1	387.1	353.6	309.4	259.8	229.2	197.9
35,0°	685.4	639.3	638.5	577.9	562.0	492.2	441.8	404.6	361.6	339.8	303.6	254.9	221.0	195.5
37,5°	690.1	660.1	599.9	547.1	498.1	448.7	418.1	403.4	375.7	361.2	333.4	262.4	232.0	194.3
40,0°	724.4	662.4	580.1	520.8	462.0	438.5	417.9	408.5	398.3	366.5	346.7	262.6	226.9	186.3
42,5°	718.5	635.0	558.7	522.4	482.8	445.5	428.3	426.5	425.5	386.5	343.8	274.3	231.8	168.1
45,0°	697.5	603.2	563.4	521.8	490.6	464.6	437.7	435.9	424.2	405.9	333.6	288.9	221.8	144.1
47,5°	654.4	596.5	572.0	528.3	508.9	480.4	448.5	426.1	417.9	405.9	339.1	287.3	203.9	127.5
50,0°	642.0	607.3	586.9	547.7	519.5	489.3	481.0	440.6	418.5	398.9	336.7	268.9	180.6	114.5
52,5°	649.7	628.7	598.9	576.1	546.3	507.7	490.4	441.6	416.3	401.2	318.1	255.7	144.5	101.0
55,0°	618.7	641.6	620.3	597.9	605.4	548.3	494.0	451.2	421.8	390.0	303.2	237.3	111.8	88.4
57,5°	637.3	633.2	630.5	647.5	680.9	614.8	545.7	460.2	400.2	352.8	257.5	196.1	108.2	74.5
60,0°	637.9	649.7	655.0	732.6	722.4	645.4	548.9	436.5	369.8	302.4	219.0	136.9	89.0	64.1
62,5°	635.6	678.1	670.9	781.7	724.4	597.7	529.7	412.4	314.7	244.1	177.1	106.5	70.6	54.5
65,0°	621.4	656.9	717.5	825.4	684.4	539.7	497.1	378.3	282.2	193.2	140.0	86.1	64.9	50.2
67,5°	585.4	600.1	695.6	835.4	648.3	490.6	483.4	368.1	239.2	159.0	108.4	81.0	62.9	43.7
70,0°	510.8	559.9	645.6	745.4	561.4	494.8	476.9	379.3	255.9	158.6	93.5	72.2	52.4	34.7
72,5°	396.5	464.8	568.7	663.8	547.9	489.1	448.3	380.6	275.1	162.2	86.1	61.8	37.5	28.2
75,0°	283.4	345.7	487.3	543.6	476.7	434.2	388.5	315.3	204.5	90.0	57.7	48.4	25.3	22.9
77,5°	172.8	199.0	248.5	275.5	266.1	278.1	224.7	180.8	112.2	64.3	41.6	33.3	20.0	16.7
80,0°	98.7	99.8	99.1	82.4	82.0	96.9	72.4	55.1	47.7	29.0	24.1	21.6	15.9	10.4
82,5°	37.8	41.6	31.6	23.5	21.4	18.4	15.9	14.1	12.2	11.0	9.6	8.4	7.6	6.9
85,0°	12.0	12.0	12.0	12.0	11.4	10.8	9.8	8.8	8.0	6.7	5.9	5.1	4.7	4.3
87,5°	7.1	7.3	7.6	7.6	7.1	6.7	6.1	5.3	3.5	4.1	3.5	3.1	2.7	2.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E61G08ME EAN: 4058352991770	LP number 58931_219
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	210.8	209.0	206.3	204.5	201.4	199.4	196.3	192.8	189.2	186.5	184.5	182.6	179.6	177.1
5,0°	223.4	220.8	213.6	205.1	197.3	190.0	184.5	181.4	179.8	179.0	177.5	176.7	174.5	172.4
7,5°	230.6	225.3	219.0	211.6	196.3	190.0	188.3	185.7	179.8	173.2	169.8	174.7	174.3	173.7
10,0°	232.4	227.9	226.7	218.1	198.8	189.8	178.3	171.2	170.2	169.8	170.4	168.8	170.2	165.1
12,5°	220.8	218.1	206.9	202.0	179.8	170.6	164.7	163.7	158.6	158.3	156.1	157.3	152.6	147.7
15,0°	209.4	203.9	196.9	184.5	165.1	159.6	149.0	149.6	148.8	146.5	143.9	143.2	139.8	128.8
17,5°	205.9	191.8	182.0	179.6	172.6	155.1	146.9	141.8	139.2	135.7	129.4	126.7	124.9	121.2
20,0°	199.2	184.9	176.9	171.6	168.8	161.2	151.6	142.4	134.9	126.3	121.4	118.8	119.0	111.0
22,5°	190.8	175.7	161.4	156.7	156.5	152.6	149.4	141.2	134.3	131.0	123.3	118.6	112.8	99.0
25,0°	182.8	165.9	152.6	143.7	138.4	134.1	136.1	132.6	127.7	132.4	124.5	116.3	107.1	97.1
27,5°	177.3	158.8	145.1	136.7	129.6	123.9	119.8	119.4	119.2	122.6	118.4	117.1	108.4	97.3
30,0°	172.8	154.3	142.8	130.8	122.8	115.9	111.0	114.5	116.9	112.2	114.7	114.3	107.5	100.4
32,5°	173.7	150.8	135.5	125.3	115.1	107.3	103.1	105.9	106.1	100.8	106.7	108.2	105.9	103.1
35,0°	165.1	138.8	127.5	113.5	105.5	98.4	94.7	94.3	97.3	92.4	95.5	104.5	105.9	100.8
37,5°	150.6	127.9	116.9	105.3	94.5	87.9	85.7	85.7	87.1	84.1	84.5	97.9	100.8	95.5
40,0°	135.3	116.7	105.9	93.9	84.7	78.2	76.3	78.2	79.8	76.9	77.5	84.9	95.9	90.8
42,5°	129.0	109.8	96.5	84.1	76.3	71.0	70.2	71.2	71.4	70.8	72.6	79.6	91.4	87.3
45,0°	121.2	102.0	90.0	76.9	70.2	66.1	64.9	64.9	65.3	66.3	69.4	73.3	82.8	80.4
47,5°	112.0	97.3	82.6	72.6	65.9	61.6	60.0	60.2	60.2	62.0	67.7	70.0	73.9	74.7
50,0°	100.2	89.4	76.1	66.3	61.4	57.1	55.3	54.5	55.3	56.9	61.8	63.3	68.4	65.7
52,5°	89.6	79.0	67.5	60.8	56.1	52.4	50.0	49.4	50.2	51.8	56.9	55.5	58.8	57.1
55,0°	77.3	68.2	59.6	54.5	51.0	47.7	45.3	44.7	45.3	46.9	49.4	50.8	50.6	52.2
57,5°	64.9	57.3	51.8	48.8	45.9	43.3	40.8	40.4	40.6	41.6	43.7	46.9	45.1	44.1
60,0°	56.1	48.4	45.3	42.4	40.6	38.4	36.7	36.1	36.3	36.9	38.6	41.0	40.8	39.0
62,5°	47.1	41.4	40.0	37.1	35.7	34.1	32.6	32.2	32.0	32.4	33.3	34.5	35.1	34.9
65,0°	40.2	34.7	33.3	32.4	31.2	30.0	29.2	28.6	28.2	28.6	29.0	30.2	30.2	28.4
67,5°	33.5	29.4	28.6	28.0	27.3	26.3	25.9	24.5	24.3	24.5	24.9	25.3	25.3	23.7
70,0°	27.8	24.7	24.1	23.7	23.3	22.9	22.4	21.0	20.8	21.0	21.2	21.8	21.0	20.2
72,5°	23.3	20.2	19.8	19.4	19.6	19.8	19.2	18.2	17.5	17.3	17.3	18.0	17.1	16.3
75,0°	17.8	16.5	15.7	15.5	15.9	16.5	16.3	15.1	14.7	14.3	14.1	14.1	13.5	13.3
77,5°	13.3	12.7	12.0	12.0	12.9	13.3	13.3	12.0	11.4	11.2	11.2	10.8	10.4	10.2
80,0°	9.6	9.2	8.8	8.8	9.4	10.0	9.8	9.2	8.6	8.4	8.4	8.0	7.3	6.7
82,5°	6.5	6.3	5.9	5.9	6.1	6.3	6.7	6.3	5.7	5.5	5.7	5.5	4.7	3.5
85,0°	3.9	3.7	3.5	3.5	3.3	3.3	3.3	3.3	3.3	3.3	2.7	2.9	2.9	2.4
87,5°	2.0	1.8	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.2	1.0	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E61G08ME EAN: 4058352991770	LP number 58931_219
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	176.7	177.9	178.8	179.6	179.6	180.4	180.4	178.3	175.3	172.8	170.6	169.8	169.8	169.2
5,0°	170.2	169.2	169.0	168.1	167.7	165.1	156.1	148.4	142.8	140.0	138.4	137.9	136.3	135.3
7,5°	173.0	168.1	159.8	151.8	140.4	129.6	126.3	125.3	124.9	121.2	120.2	119.6	118.8	117.1
10,0°	159.6	156.3	147.7	130.6	124.9	122.6	120.8	116.9	112.6	109.6	108.8	107.7	106.7	106.7
12,5°	141.2	137.7	129.4	120.6	116.5	106.7	102.8	100.4	100.4	99.2	96.7	99.0	101.6	105.1
15,0°	124.9	119.6	110.4	103.3	90.2	87.7	85.9	85.1	85.9	88.2	92.6	98.6	103.9	108.8
17,5°	111.8	100.6	88.6	78.8	75.7	75.7	75.3	76.7	80.4	86.5	93.5	100.2	107.7	114.5
20,0°	94.3	84.3	77.5	72.6	69.4	67.7	69.0	72.4	77.7	84.7	92.4	101.2	110.4	119.2
22,5°	90.2	79.2	70.6	69.0	65.7	65.3	65.3	68.2	73.7	81.0	90.8	100.2	110.6	121.6
25,0°	86.7	76.1	71.6	69.4	65.3	62.6	62.0	63.7	69.2	77.3	86.9	97.3	108.6	121.8
27,5°	88.4	77.5	71.8	70.0	67.3	61.2	57.1	59.8	65.1	73.1	82.0	91.0	103.5	120.2
30,0°	89.6	77.7	73.5	71.0	66.5	59.8	56.9	57.5	61.4	71.8	78.4	84.7	96.1	110.8
32,5°	92.8	76.3	72.8	68.0	63.5	59.8	58.2	58.2	59.2	63.9	70.8	79.4	88.4	104.5
35,0°	86.7	75.9	71.6	63.9	63.5	60.4	60.4	58.8	57.5	58.2	64.5	77.5	81.8	98.4
37,5°	82.4	78.8	72.0	64.5	62.4	60.8	61.4	63.5	57.7	53.7	56.5	66.1	77.1	89.4
40,0°	81.4	77.3	73.3	66.7	61.8	58.2	58.0	60.8	58.4	53.3	55.3	60.8	76.9	79.8
42,5°	78.6	70.8	71.6	65.3	61.4	58.8	57.1	58.4	62.4	64.3	56.9	58.2	68.2	76.5
45,0°	71.0	65.9	65.1	59.6	59.0	58.0	55.7	58.4	68.0	68.4	52.2	51.8	59.2	67.7
47,5°	65.3	61.4	58.8	56.3	53.1	48.6	58.2	68.4	68.2	57.5	50.0	48.0	51.2	64.7
50,0°	58.6	59.4	55.1	52.2	49.6	52.4	66.3	81.4	61.0	48.4	42.9	37.1	42.4	51.4
52,5°	51.4	53.3	50.6	48.4	47.3	61.0	74.9	66.1	48.4	40.6	34.9	31.8	40.6	43.5
55,0°	44.7	46.5	45.3	44.1	55.1	71.4	65.9	56.3	40.4	31.6	31.2	34.1	39.8	38.6
57,5°	39.8	39.8	39.2	40.4	46.7	51.8	49.0	41.4	34.7	29.4	28.0	30.0	33.5	31.4
60,0°	34.7	34.1	34.1	33.9	35.5	33.5	32.4	32.0	30.0	29.2	26.5	25.3	25.7	29.2
62,5°	30.2	29.2	28.8	29.2	26.5	25.1	25.3	23.3	23.7	22.9	23.9	22.2	21.6	23.7
65,0°	26.7	26.3	24.3	24.3	23.5	22.2	20.8	21.4	20.2	19.8	21.4	19.6	20.2	21.4
67,5°	23.5	22.7	22.0	21.2	21.0	19.0	19.2	18.6	17.8	17.8	22.0	18.6	19.2	20.0
70,0°	19.4	19.6	19.2	18.4	17.5	16.7	16.1	15.9	15.9	16.5	19.8	17.5	18.0	18.6
72,5°	16.1	16.3	16.1	15.1	14.7	14.5	14.1	14.1	14.3	14.9	15.9	15.7	15.9	16.3
75,0°	13.1	13.3	13.3	12.4	12.4	12.2	12.2	12.2	12.4	12.9	13.3	13.5	13.9	14.1
77,5°	10.0	10.6	10.6	10.0	10.0	10.0	10.0	10.0	10.2	10.6	10.8	11.0	11.2	11.4
80,0°	7.1	7.8	8.0	7.6	7.6	7.6	7.6	7.8	8.0	8.2	8.4	8.6	8.6	8.8
82,5°	4.5	5.7	5.3	5.3	5.3	5.5	5.7	5.7	5.9	6.1	6.1	6.3	6.5	6.7
85,0°	2.9	3.1	3.3	3.3	3.5	3.7	3.9	4.1	4.1	4.3	4.5	4.5	4.5	4.7
87,5°	1.2	1.4	1.6	1.8	2.0	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E61G08ME EAN: 4058352991770	LP number 58931_219
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd / Luminous flux in lm/klm				
0,0°	200.4	200.4	0.3	0.3
2,5°	168.6	167.9	2.4	2.7
5,0°	134.5	133.7	4.8	7.5
7,5°	115.3	113.5	7.3	14.8
10,0°	107.3	107.3	9.9	24.7
12,5°	107.5	110.2	12.2	36.9
15,0°	113.3	116.7	14.9	51.8
17,5°	120.8	125.5	17.6	69.4
20,0°	127.5	134.1	20.6	90.0
22,5°	132.2	140.8	23.7	113.6
25,0°	134.3	144.7	27.0	140.6
27,5°	132.0	142.8	30.9	171.5
30,0°	125.5	138.6	33.9	205.4
32,5°	125.1	135.7	36.8	242.2
35,0°	115.9	126.9	38.9	281.1
37,5°	109.4	122.2	41.1	322.3
40,0°	97.1	109.0	43.3	365.6
42,5°	87.7	103.3	45.3	410.9
45,0°	76.1	92.0	46.9	457.9
47,5°	65.9	80.0	47.9	505.7
50,0°	57.1	70.6	48.6	554.3
52,5°	48.8	56.9	49.2	603.5
55,0°	44.5	51.0	49.8	653.4
57,5°	36.1	44.3	49.8	703.1
60,0°	30.6	36.9	48.9	752.0
62,5°	25.9	31.8	46.3	798.4
65,0°	23.5	27.5	43.5	841.8
67,5°	21.2	23.5	39.4	881.2
70,0°	19.2	20.4	35.2	916.3
72,5°	16.7	17.5	29.9	946.3
75,0°	14.5	15.1	23.8	970.0
77,5°	11.6	12.0	15.3	985.4
80,0°	9.0	9.4	7.8	993.2
82,5°	6.7	6.9	3.8	997.0
85,0°	4.7	4.9	2.0	999.1
87,5°	2.4	2.4	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E61G08ME EAN: 4058352991770	LP number 58931_219
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	13830	123.9	130.9	127.4
95	241	252	13122	116.1	122.7	119.4
90	229	250	12469	109.3	115.4	112.4
85	216	248	11761	102.0	107.7	104.8
80	203	246	11053	94.9	100.2	97.6
75	190	243	10345	88.1	92.9	90.5
70	178	241	9692	81.9	86.4	84.2
65	165	238	8984	75.2	79.4	77.3
60	152	235	8276	68.9	72.7	70.8
55	140	232	7623	63.0	66.4	64.7
50	127	229	6915	56.7	59.9	58.3
45	114	225	6207	50.6	53.4	52.0
40	102	221	5554	45.0	47.4	46.2
35	89	216	4846	39.1	41.2	40.2
30	76	210	4138	33.4	35.1	34.2
25	63	203	3430	27.7	29.1	28.4
20	51	195	2777	22.5	23.6	23.0
15	38	184	2069	17.1	17.9	17.5
13	33	179	1797	15.0	15.7	15.4