

Photometric test report

Family
Streetlight 21 micro LED



Order number: 5XE1R31U08DB
EAN: 4069025148506

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting, Smart Interface down

direct, asymmetric wide distribution P08B001

toughened safety glass

LED 3000 K | CRI ≥ 70


EVG SITECO iQ - Smart Interface

Net luminous flux = 4550 lm
Power consumption = 39.1 W
Luminous efficacy = 116.4 lm/W

LP number
59535_7

serial
documentation
18.01.2024

siteco

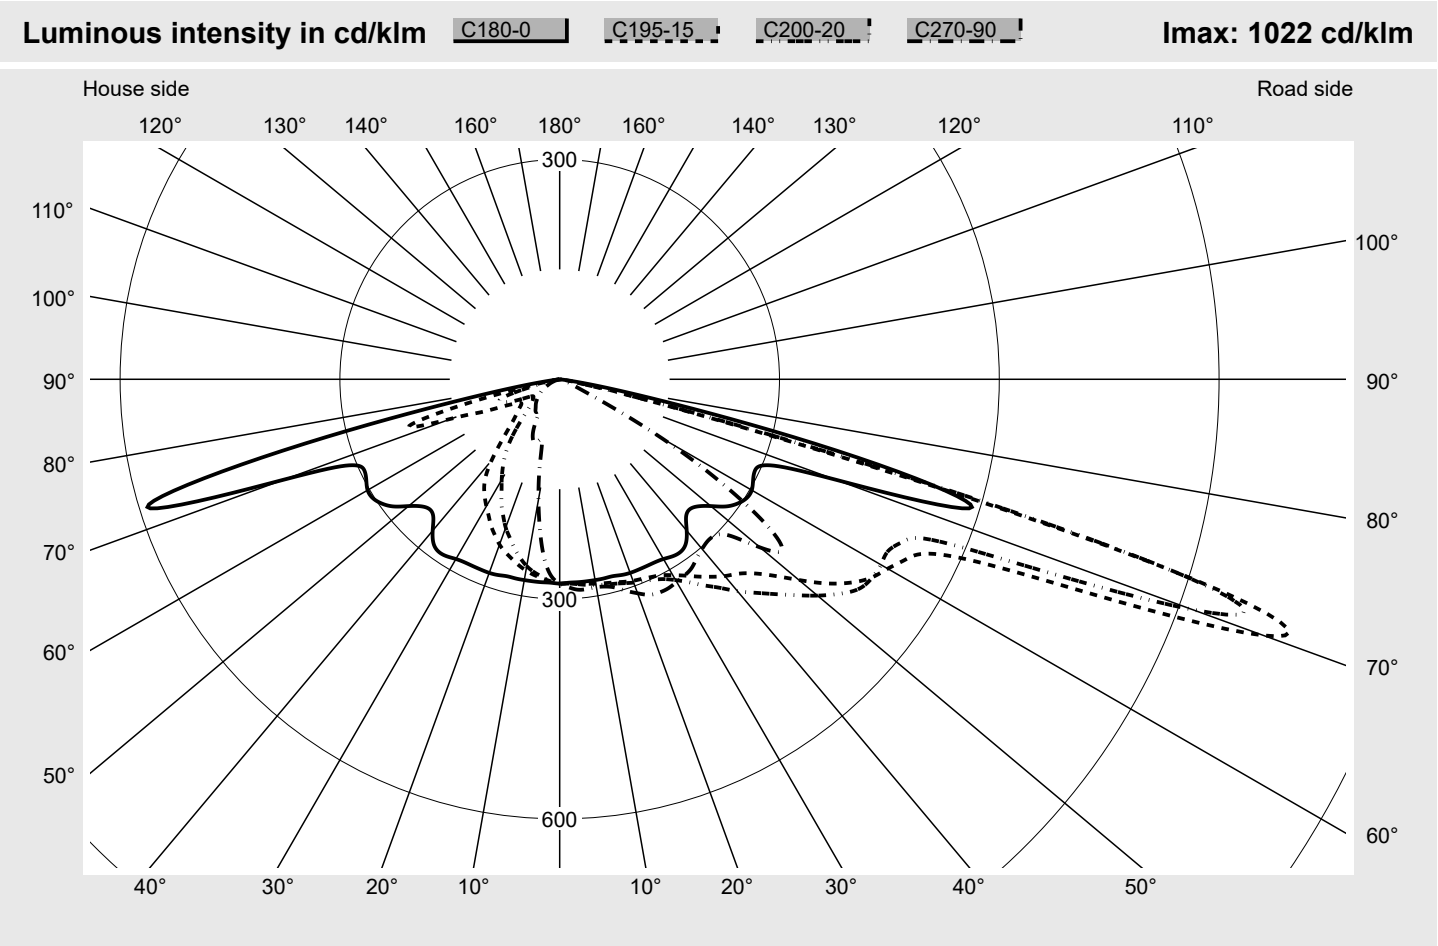

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	1022.3
Eta 90° - 180°	0.0%	Imax 80°	56.2
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Streetlight 21 micro LED

Order number: **5XE1R31U08DB**
EAN: **4069025148506**

LP number
59535_7

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

siteco

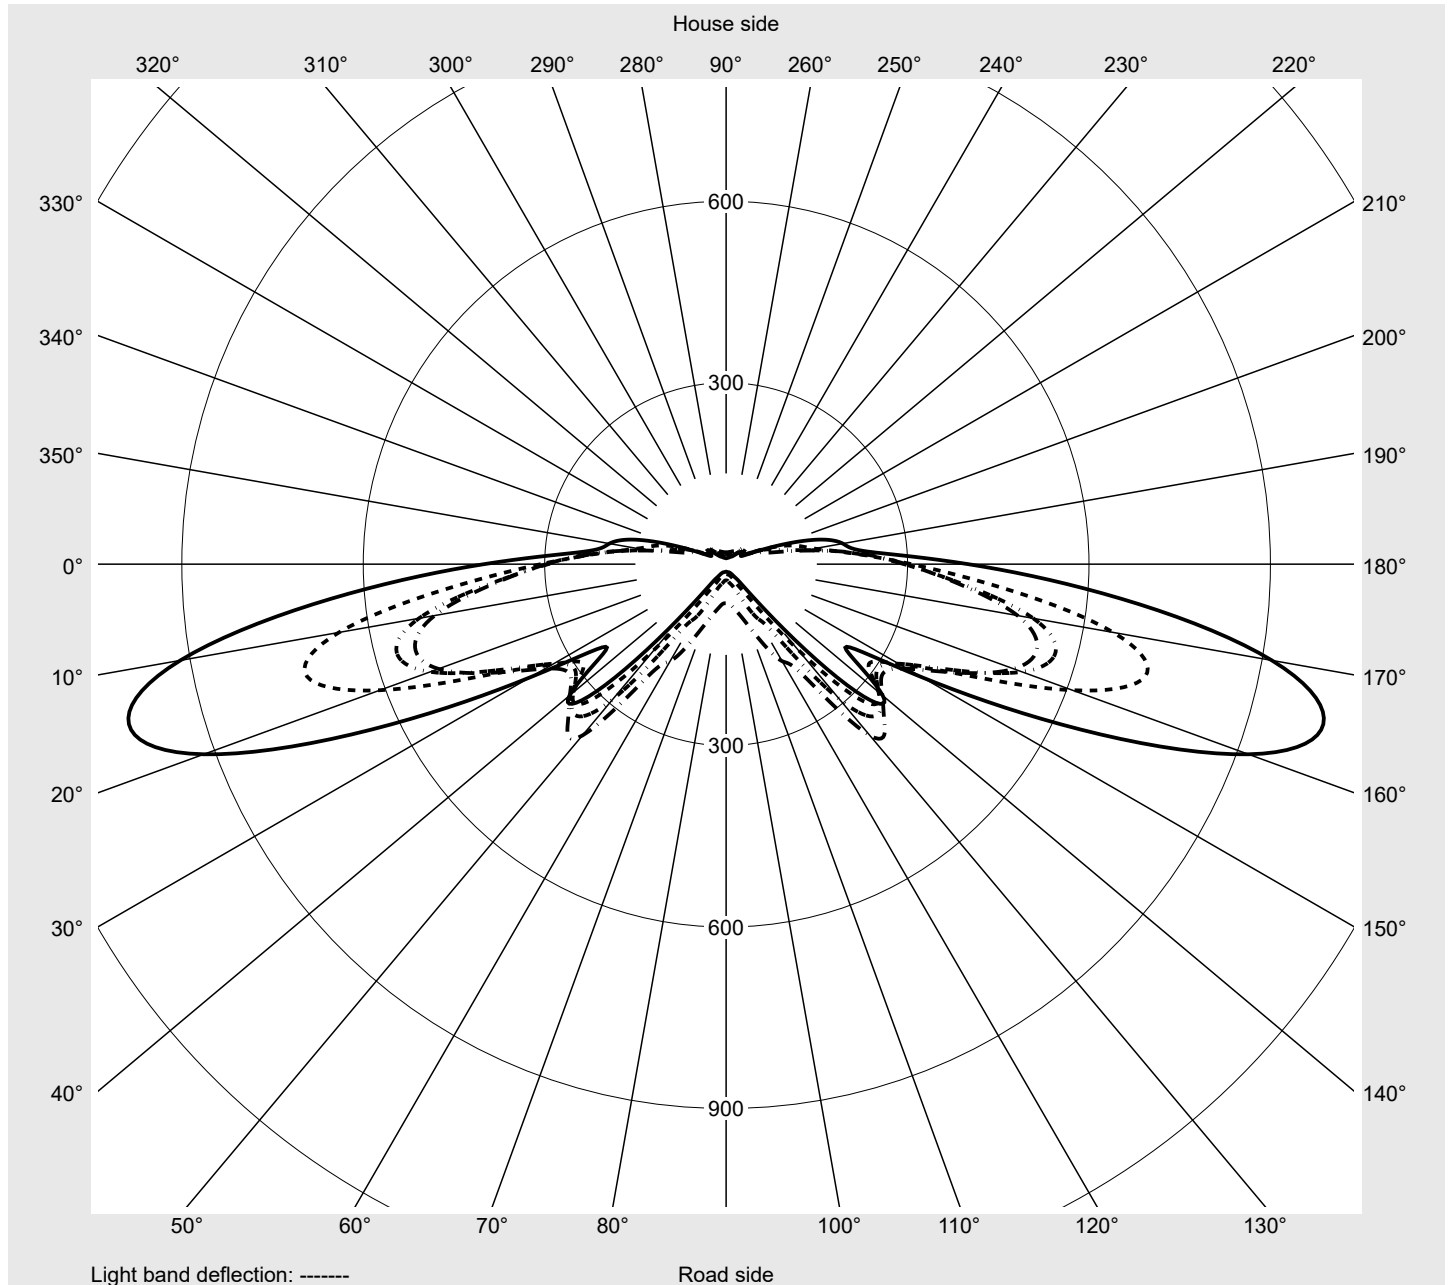

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1R31U08DB EAN: 4069025148506	LP number 59535_7
------------------------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	277.9	277.8	278.3	278.5	279.1	279.5	279.7	280.3	281.1	281.1	281.8	282.0	282.5
5,0°	278.0	278.0	278.8	279.6	280.7	281.8	282.5	283.4	284.3	284.7	285.3	285.7	286.3
7,5°	278.2	278.8	279.7	281.6	283.0	284.3	285.2	285.8	286.5	286.6	286.8	287.0	287.2
10,0°	278.3	279.3	281.1	283.2	284.8	286.1	286.8	287.1	287.4	287.5	287.6	287.5	287.6
12,5°	278.4	280.6	282.9	285.1	287.1	288.1	288.1	288.3	288.6	288.3	288.2	288.3	288.1
15,0°	278.3	281.8	284.2	287.0	288.9	289.7	290.4	290.4	290.4	290.5	290.7	291.2	291.5
17,5°	280.1	284.2	287.0	289.9	291.8	292.6	293.2	293.3	294.2	295.6	296.5	297.9	299.1
20,0°	281.2	286.5	289.9	292.7	295.2	296.4	297.4	298.7	300.7	302.2	304.8	306.3	307.6
22,5°	281.2	288.0	291.8	294.7	298.0	300.7	303.7	306.7	309.6	312.0	314.3	316.4	318.0
25,0°	281.2	289.0	293.5	297.6	302.0	305.6	310.8	316.1	320.1	323.0	325.6	327.5	328.0
27,5°	281.6	290.6	296.3	301.5	307.4	313.2	319.9	326.8	332.3	336.2	338.0	338.5	336.9
30,0°	283.2	294.4	301.5	308.8	316.5	324.6	332.6	340.2	345.8	350.2	351.0	348.3	344.3
32,5°	286.5	299.7	308.4	317.7	328.5	340.0	349.8	357.0	362.1	365.5	364.2	358.0	349.5
35,0°	287.6	303.8	315.5	328.7	343.4	357.5	368.6	376.7	381.4	382.7	377.3	366.1	353.1
37,5°	282.8	302.1	319.8	339.7	358.7	375.8	388.1	395.7	398.9	396.8	386.6	370.4	354.4
40,0°	269.7	294.5	321.2	350.6	377.6	398.0	410.2	417.0	415.9	407.6	392.5	373.6	355.1
42,5°	255.3	287.6	322.7	360.0	395.2	420.8	432.6	434.9	428.7	414.1	394.4	373.9	354.4
45,0°	251.0	289.5	331.0	374.7	414.6	444.9	453.6	450.5	436.8	415.6	393.7	371.5	352.8
47,5°	256.6	303.0	350.2	396.9	436.1	462.6	468.6	458.1	439.5	412.5	387.5	369.7	355.1
50,0°	269.2	324.0	378.1	426.2	459.3	475.7	475.8	456.8	430.3	401.5	381.2	373.1	369.5
52,5°	285.2	346.9	408.8	457.5	481.0	483.4	467.9	440.5	409.6	388.7	382.1	388.8	404.4
55,0°	295.9	364.8	434.7	484.0	498.6	480.9	443.0	412.5	385.1	377.3	391.6	422.7	440.8
57,5°	302.2	378.2	457.4	504.1	505.0	463.7	409.7	376.6	362.7	372.1	410.7	405.5	386.0
60,0°	302.7	385.2	474.2	517.0	506.3	445.5	376.2	342.3	346.6	374.1	408.1	323.4	289.9
62,5°	297.6	389.4	489.3	532.5	506.1	424.7	345.6	316.1	337.3	370.1	369.8	228.7	185.2
65,0°	294.2	397.3	515.7	563.9	520.7	414.1	329.1	304.9	329.7	352.9	292.0	146.3	103.0
67,5°	306.5	462.0	650.1	717.4	609.4	431.9	331.0	288.1	329.0	319.8	183.6	76.0	42.3
70,0°	400.3	655.6	916.4	1022.3	919.1	647.3	374.3	240.7	338.2	282.9	84.5	28.5	20.0
72,5°	586.0	762.4	853.4	904.4	899.0	672.4	361.6	293.9	353.5	133.4	22.0	16.9	14.5
75,0°	449.7	381.0	325.6	308.5	339.8	261.0	278.4	408.8	241.2	30.0	14.0	12.7	10.9
77,5°	187.6	136.4	104.4	83.4	66.4	31.3	81.0	143.9	55.8	10.9	9.4	9.1	7.9
80,0°	56.2	38.7	28.1	20.2	12.5	7.1	6.9	10.5	5.9	5.4	6.4	5.7	5.0
82,5°	9.6	8.1	6.9	5.8	4.4	3.9	3.4	3.0	2.7	2.5	2.7	2.4	2.4
85,0°	2.7	2.5	2.3	2.2	1.9	1.7	1.6	1.6	1.3	1.3	1.2	1.1	1.0
87,5°	1.5	1.3	1.2	1.2	1.1	1.0	1.0	0.8	0.8	0.8	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED		Order number: 5XE1R31U08DB EAN: 4069025148506										LP number 59535_7	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	282.9	283.2	283.5	283.8	284.1	284.2	277.4	276.4	276.1	275.6	274.5	273.9	273.1
5,0°	286.6	287.0	287.2	287.6	288.0	288.3	277.0	274.5	272.6	270.8	268.5	266.3	264.1
7,5°	287.4	287.5	287.8	288.2	288.3	288.6	276.2	272.6	269.3	265.7	261.4	256.5	251.1
10,0°	287.2	287.1	287.2	287.7	288.3	288.1	275.3	270.3	265.0	258.9	250.7	242.0	231.8
12,5°	288.1	288.2	288.7	289.2	289.4	289.8	274.1	267.4	259.7	249.5	236.8	222.9	208.7
15,0°	292.0	292.1	292.7	293.8	294.2	294.4	273.1	264.3	253.4	238.6	221.3	203.4	184.9
17,5°	299.9	300.3	300.8	301.6	302.6	302.8	273.2	261.7	247.2	226.6	204.9	181.7	160.7
20,0°	308.0	308.8	309.2	309.9	310.3	310.8	273.2	259.9	240.1	215.4	188.9	162.4	139.4
22,5°	318.6	318.4	318.1	317.7	317.8	318.3	271.5	255.2	230.6	201.6	170.3	143.2	114.9
25,0°	327.4	325.7	323.3	321.8	320.7	321.2	269.5	249.4	221.2	187.9	153.1	121.8	90.5
27,5°	334.3	330.2	326.2	323.3	321.5	321.5	266.7	243.2	210.0	171.9	135.7	99.1	71.1
30,0°	339.2	333.1	326.9	322.2	319.5	319.3	265.3	237.9	200.2	158.3	118.4	79.9	62.3
32,5°	341.5	333.3	325.9	320.7	318.1	317.3	264.9	232.9	190.4	145.0	101.3	66.5	60.1
35,0°	342.5	333.9	325.9	318.9	315.1	314.2	263.0	225.7	179.7	131.6	85.9	59.6	60.6
37,5°	342.0	331.6	322.7	314.3	309.4	307.4	254.3	213.3	165.2	116.7	73.0	56.4	60.0
40,0°	340.1	328.2	319.5	310.6	304.4	302.4	235.8	192.1	144.6	99.3	62.9	54.2	57.1
42,5°	337.2	325.3	318.1	307.7	301.1	299.2	216.4	169.2	122.0	81.3	56.4	52.1	54.2
45,0°	337.1	325.6	317.5	309.4	303.1	301.1	203.9	150.0	103.2	66.2	51.0	50.1	52.0
47,5°	343.8	336.0	329.8	323.8	318.2	316.4	200.2	139.3	88.8	56.2	48.4	48.6	50.7
50,0°	367.8	368.7	368.6	364.8	359.1	357.0	204.6	135.1	79.1	49.7	47.4	49.0	50.6
52,5°	419.9	422.4	412.8	399.2	386.2	382.4	211.0	133.0	72.3	46.2	47.5	49.5	49.6
55,0°	424.6	395.0	374.2	359.3	344.6	341.1	216.4	132.7	66.2	43.9	45.5	46.9	45.5
57,5°	353.8	310.6	285.4	270.3	259.7	257.6	218.5	130.4	61.9	43.1	41.0	41.0	39.3
60,0°	250.3	204.6	182.6	173.4	165.1	161.8	217.0	129.2	64.3	47.9	38.9	36.0	36.2
62,5°	145.5	108.8	86.7	74.0	66.0	64.6	214.2	129.0	73.8	58.1	41.2	33.5	34.8
65,0°	67.5	45.0	35.7	31.3	27.6	26.8	210.1	133.0	90.9	71.2	45.1	31.9	34.7
67,5°	26.8	20.8	18.5	17.5	16.8	16.4	208.5	148.3	118.6	81.6	45.1	29.9	33.7
70,0°	16.2	14.4	13.8	13.2	12.7	12.3	236.4	195.9	156.6	87.0	37.9	28.1	32.3
72,5°	12.8	11.4	10.8	10.2	9.6	9.4	409.6	322.7	215.6	78.7	30.0	27.9	29.6
75,0°	9.7	8.6	7.9	7.5	7.1	7.0	414.6	266.9	148.4	43.3	26.7	27.7	25.5
77,5°	6.7	5.8	5.3	5.0	4.7	4.6	158.3	92.5	50.4	16.7	18.7	22.5	20.1
80,0°	4.0	3.5	3.0	2.9	2.7	2.7	44.1	27.3	12.5	8.6	10.0	12.3	11.7
82,5°	2.2	2.1	1.8	1.8	1.7	1.7	10.0	6.4	4.8	4.8	5.1	5.3	5.2
85,0°	1.0	1.0	1.0	0.8	0.8	1.0	2.8	2.8	2.8	2.7	2.5	2.4	2.2
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family				Order number: 5XE1R31U08DB									LP number			
Streetlight 21 micro LED				EAN: 4069025148506									59535_7			
Table of values for luminous intensities													Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone			
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm				
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	0.4	0.4			
2,5°	272.2	271.8	271.0	270.4	269.8	269.5	269.2	268.7	268.6	268.6	268.5	3.3	3.7			
5,0°	261.5	258.9	256.5	253.9	251.4	249.4	247.6	246.1	245.0	244.4	244.3	6.5	10.2			
7,5°	244.8	238.5	232.3	226.9	221.6	217.2	213.5	210.6	208.6	207.3	206.8	9.4	19.6			
10,0°	221.4	211.9	203.1	194.5	186.1	179.5	174.5	171.0	168.5	167.1	166.7	12.0	31.6			
12,5°	195.0	181.2	169.8	160.0	151.3	144.4	138.5	134.0	131.0	128.9	128.4	14.2	45.8			
15,0°	167.9	153.5	140.2	128.2	117.7	109.1	102.7	98.6	95.9	94.7	94.3	16.3	62.0			
17,5°	142.2	124.6	108.6	95.7	87.6	83.9	83.1	83.8	84.7	85.5	85.9	18.4	80.4			
20,0°	116.6	96.4	83.1	78.2	78.6	81.3	84.5	87.3	89.3	90.3	90.9	20.8	101.2			
22,5°	89.5	75.2	72.6	76.0	80.9	85.1	88.4	90.5	91.6	91.8	92.2	23.2	124.4			
25,0°	71.4	68.6	73.3	79.7	85.5	88.8	90.0	89.7	88.7	87.4	87.1	25.6	150.0			
27,5°	64.7	70.1	78.6	86.0	89.6	90.0	87.9	84.8	81.5	78.7	77.4	28.0	178.0			
30,0°	64.8	74.0	83.0	87.6	87.7	84.1	78.9	73.3	68.2	64.5	62.9	30.3	208.3			
32,5°	67.5	77.3	83.7	84.9	81.4	75.6	69.2	63.0	57.6	53.9	52.5	32.7	241.0			
35,0°	69.5	77.5	81.3	79.5	74.6	69.1	63.6	59.6	56.8	55.4	54.7	35.2	276.2			
37,5°	66.9	72.0	72.9	70.1	66.3	64.1	63.0	61.0	57.8	55.1	54.2	37.4	313.5			
40,0°	61.1	63.3	62.3	60.6	62.2	62.0	58.2	55.0	53.0	51.5	51.0	39.1	352.7			
42,5°	56.2	56.2	55.5	58.5	59.0	54.9	52.9	51.4	50.1	49.0	48.4	40.8	393.5			
45,0°	53.0	52.6	55.5	57.6	52.9	50.7	49.0	47.7	46.7	46.0	45.7	42.7	436.2			
47,5°	51.0	53.0	57.0	52.2	48.3	46.4	45.0	44.0	43.2	42.7	42.6	45.2	481.4			
50,0°	50.3	54.8	53.7	46.7	43.9	42.3	41.2	40.5	39.8	39.4	39.2	48.5	529.9			
52,5°	49.2	54.1	48.4	42.2	39.7	38.5	37.5	36.4	35.8	35.3	35.3	52.1	582.0			
55,0°	47.2	51.3	42.8	37.7	35.7	34.3	33.3	32.8	32.2	31.9	31.9	53.0	634.9			
57,5°	46.8	46.6	37.7	33.1	31.7	30.7	29.9	29.5	29.0	28.8	28.8	50.6	685.5			
60,0°	45.6	41.7	32.2	29.5	28.5	27.6	26.4	25.5	24.7	24.2	24.2	46.4	731.9			
62,5°	43.5	35.8	28.2	26.2	24.8	23.3	21.9	20.9	20.2	19.7	19.8	41.6	773.6			
65,0°	39.3	31.9	24.7	22.4	20.8	19.0	17.8	17.1	16.4	16.2	16.2	38.9	812.4			
67,5°	35.7	27.6	20.9	18.1	16.8	15.5	14.4	13.8	13.5	13.3	13.3	40.2	852.7			
70,0°	31.4	23.6	17.7	15.1	13.8	12.3	11.5	10.8	10.3	9.9	9.7	49.7	902.3			
72,5°	26.8	19.7	14.6	12.0	10.5	9.1	8.2	7.7	7.3	6.8	6.8	52.1	954.4			
75,0°	22.1	15.8	11.6	9.2	7.7	6.8	5.8	5.3	4.8	4.6	4.6	30.6	985.0			
77,5°	16.3	11.4	8.2	6.4	5.3	4.4	3.7	3.1	2.9	2.7	2.7	10.4	995.4			
80,0°	9.8	6.7	5.0	4.0	3.1	2.5	2.1	1.7	1.3	1.0	1.0	2.9	998.4			
82,5°	4.5	3.5	2.8	2.1	1.6	1.3	1.1	1.0	0.7	0.6	0.5	1.0	999.3			
85,0°	1.9	1.7	1.5	1.1	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.4	999.8			
87,5°	1.2	1.1	0.8	0.8	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.2	1000.0			
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0			

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1R31U08DB EAN: 4069025148506	LP number 59535_7
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	4550	39.1	41.2	40.2
95	241	252	4317	36.4	38.2	37.3
90	229	250	4102	33.9	35.7	34.8
85	216	248	3869	31.5	33.0	32.2
80	203	246	3636	29.0	30.5	29.8
75	190	243	3404	26.7	28.1	27.4
70	178	241	3189	24.7	25.9	25.3
65	165	238	2956	22.5	23.6	23.0
60	152	235	2723	20.5	21.4	21.0
55	140	232	2508	18.6	19.5	19.0
50	127	229	2275	16.7	17.5	17.1
45	114	225	2042	14.8	15.5	15.2
40	102	221	1827	13.1	13.8	13.4
35	89	216	1594	11.4	11.9	11.6
30	76	210	1361	9.7	10.2	10.0
25	63	203	1129	8.1	8.4	8.2
20	51	195	914	6.6	6.9	6.8
15	38	184	681	5.1	5.3	5.2
10	26	171	466	3.7	3.9	3.8

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	4550	38.2	39.6	38.9
95	241	252	4317	35.7	37.0	36.4
90	229	250	4102	33.4	34.6	34.0
85	216	248	3869	31.0	32.1	31.6
80	203	246	3637	28.7	29.7	29.2
75	190	243	3404	26.4	27.4	26.9
70	178	241	3189	24.4	25.3	24.8
65	165	238	2956	22.4	23.2	22.8
60	152	235	2723	20.4	21.0	20.7
55	140	232	2508	18.5	19.2	18.8
50	127	229	2275	16.7	17.2	17.0
45	114	225	2042	14.8	15.3	15.0
40	102	221	1827	13.1	13.6	13.4
35	89	216	1594	11.4	11.8	11.6
30	76	210	1361	9.8	10.0	9.9
25	63	203	1129	8.1	8.3	8.2
20	51	195	914	6.7	6.8	6.8
15	38	184	681	5.1	5.3	5.2
10	26	171	466	3.8	3.8	3.8

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1R31U08DB EAN: 4069025148506	LP number 59535_7
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	4550	38.6	40.3	39.4
95	241	252	4317	35.9	37.5	36.7
90	229	250	4102	33.6	35.0	34.3
85	216	248	3869	31.2	32.5	31.8
80	203	246	3636	28.8	30.0	29.4
75	191	244	3421	26.7	27.8	27.2
70	178	241	3189	24.6	25.5	25.0
65	165	238	2956	22.5	23.3	22.9
60	152	235	2723	20.4	21.2	20.8
55	140	232	2508	18.6	19.3	19.0
50	127	229	2275	16.6	17.3	17.0
45	114	225	2042	14.8	15.4	15.1
40	102	221	1827	13.1	13.7	13.4
35	89	216	1594	11.4	11.8	11.6
30	76	210	1361	9.7	10.0	9.8
25	64	204	1146	8.2	8.5	8.4
20	51	195	914	6.7	6.9	6.8
15	38	184	681	5.1	5.3	5.2
10	26	171	466	3.7	3.9	3.8

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1R31U08DB EAN: 4069025148506	LP number 59535_7
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	4550.0	39.1
5.0	4550.0	38.2
15.0	4550.0	38.6