

Photometric test report

Family
Streetlight 21 micro LED

Order number: 5XE1U31Y08CB
EAN: 4069025148827

LP number
59536_179



Version post-top or side-entry mounting, Smart Interface up/down
Optic direct, asymmetric wide distribution P080001
Cover toughened safety glass
Lamps LED 3000 K | CRI ≥ 70
Controlgear EVG SITECO iQ - Smart Interface
Rated values Net luminous flux = 2890 lm
 Power consumption = 19.1 W
 Luminous efficacy = 151.3 lm/W

serial
documentation
18.01.2024

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 879 cd/klm

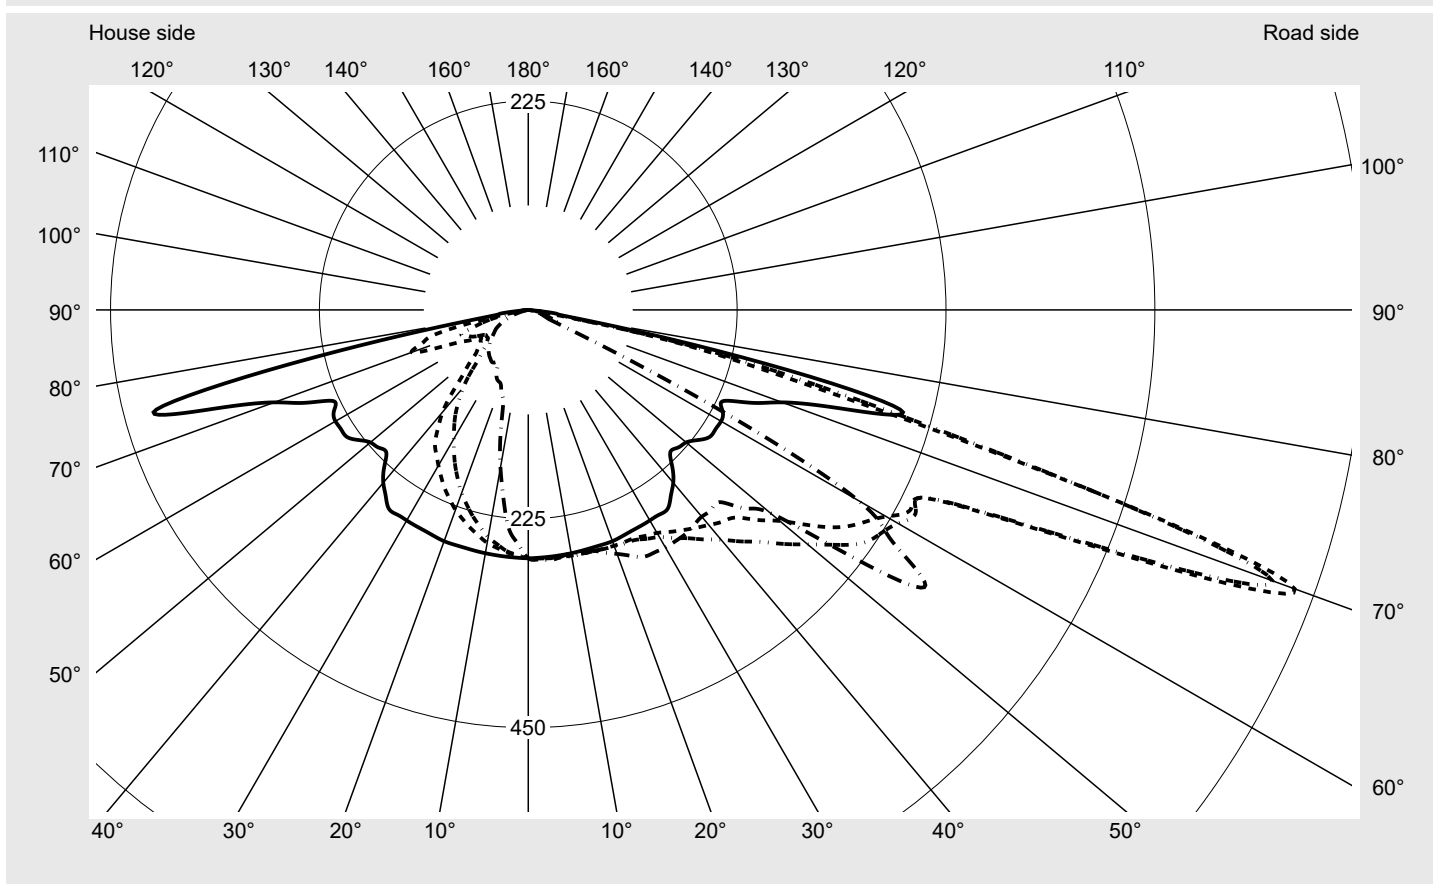

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	878.7
Imax 80°	57.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 micro LED

Order number: **5XE1U31Y08CB**
EAN: **4069025148827**

LP number
59536_179

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

siteco

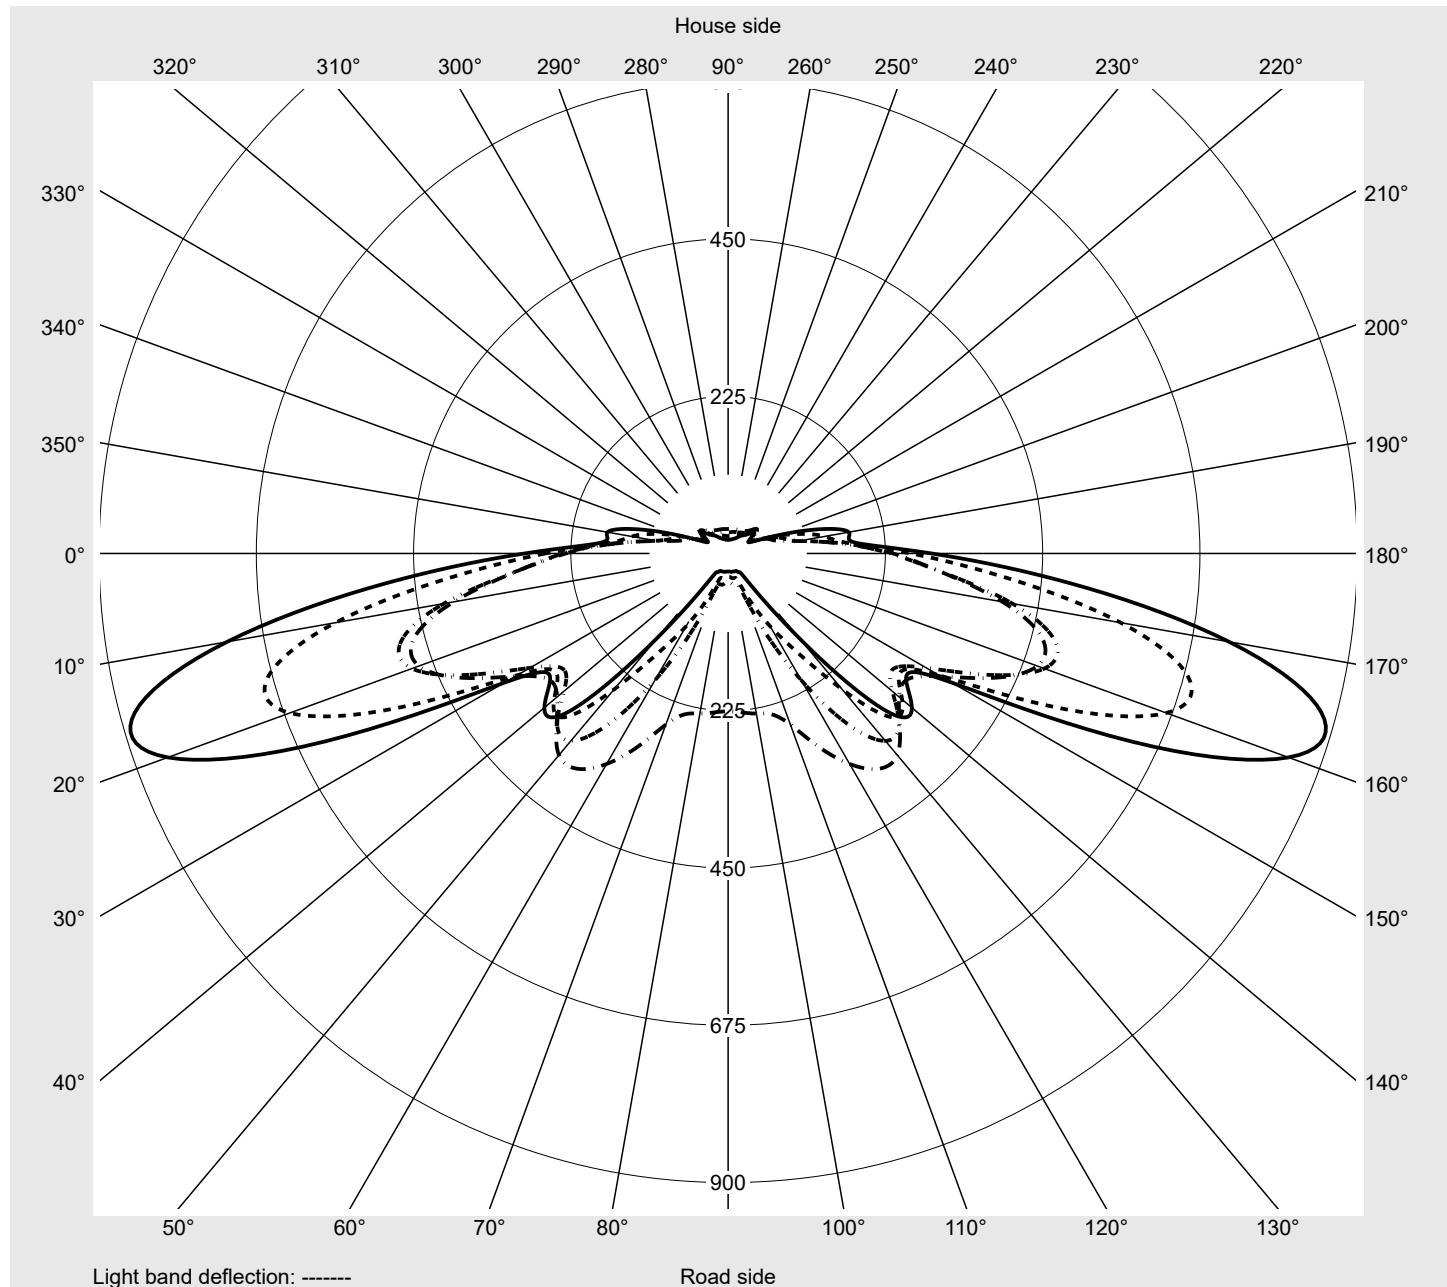

Photometric test report

Family Streetlight 21 micro LED		Order number: 5XE1U31Y08CB EAN: 4069025148827										LP number 59536_179	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	267.2	267.2	267.4	267.7	268.0	268.2	268.3	268.4	268.7	268.6	268.6	268.7	268.7
5,0°	266.9	266.9	267.2	267.8	268.6	268.9	269.1	269.3	269.8	269.6	269.6	269.8	269.9
7,5°	266.5	266.7	267.4	268.3	269.0	269.1	269.0	269.1	269.2	269.0	268.6	268.3	268.2
10,0°	266.2	266.6	267.5	268.8	269.4	269.4	269.0	268.9	268.7	268.3	267.5	266.8	266.5
12,5°	265.7	266.8	267.7	268.9	269.3	269.2	268.7	268.4	268.0	267.7	267.2	266.8	266.7
15,0°	265.2	267.0	267.9	269.1	269.2	269.1	268.3	267.9	267.3	267.0	266.9	266.8	267.0
17,5°	265.2	267.9	268.8	269.7	270.1	270.0	269.8	269.8	269.9	270.4	270.8	271.1	271.6
20,0°	265.1	268.9	269.6	270.3	271.0	270.8	271.2	271.7	272.4	273.8	274.7	275.4	276.3
22,5°	264.0	268.4	269.8	270.7	272.2	273.3	274.8	276.9	278.7	280.6	282.2	283.8	285.0
25,0°	262.8	268.0	269.9	271.2	273.4	275.7	278.4	282.1	285.0	287.4	289.7	292.2	293.7
27,5°	262.3	269.0	271.7	274.3	277.9	281.8	286.1	291.1	295.3	299.0	301.4	302.9	302.7
30,0°	261.9	269.9	273.5	277.4	282.5	287.8	293.9	300.0	305.5	310.6	313.1	313.5	311.7
32,5°	261.8	271.7	277.3	283.5	291.4	299.5	307.7	315.0	321.0	325.6	326.4	323.2	318.0
35,0°	261.7	273.6	281.1	289.6	300.3	311.1	321.4	329.9	336.4	340.6	339.8	332.9	324.3
37,5°	252.3	268.4	281.4	296.0	311.7	326.6	338.9	348.1	353.7	354.6	350.3	339.3	327.6
40,0°	243.0	263.2	281.8	302.4	323.1	342.1	356.4	366.4	370.9	368.7	360.7	345.6	330.9
42,5°	229.8	256.4	281.5	309.4	338.2	363.9	378.3	385.7	385.6	377.9	365.2	348.0	332.0
45,0°	216.5	249.6	281.2	316.3	353.3	385.7	400.3	405.0	400.3	387.0	369.7	350.4	333.1
47,5°	219.3	258.6	295.9	335.0	373.2	403.4	416.6	415.9	404.4	385.7	366.0	350.2	338.2
50,0°	222.0	267.6	310.6	353.7	393.0	421.0	433.0	426.9	408.5	384.3	362.2	350.0	343.3
52,5°	230.3	281.2	331.6	380.9	415.7	432.1	429.8	415.1	391.8	372.1	363.5	370.8	388.4
55,0°	238.5	294.7	352.7	408.1	438.3	443.1	426.6	403.4	375.0	359.8	364.8	391.6	433.4
57,5°	239.2	300.2	368.4	426.7	449.2	436.9	401.3	371.3	353.4	354.2	384.0	423.0	459.6
60,0°	239.9	305.7	384.0	445.2	460.1	430.6	376.1	339.2	331.9	348.6	403.2	454.3	485.7
62,5°	236.0	306.5	398.6	464.7	470.8	420.8	351.7	313.7	319.3	347.2	376.6	376.0	347.7
65,0°	232.2	307.3	413.1	484.1	481.4	410.9	327.3	288.2	306.7	345.7	350.0	297.8	209.7
67,5°	261.7	400.0	570.4	681.4	667.3	523.6	348.4	299.5	324.9	331.4	253.7	172.7	120.4
70,0°	291.2	492.6	727.8	878.7	853.1	636.3	369.5	310.8	343.1	317.0	157.5	47.7	31.0
72,5°	353.0	430.5	526.3	594.6	600.5	549.8	505.8	527.8	350.6	186.2	90.1	34.6	25.1
75,0°	414.8	368.5	324.8	310.5	347.9	463.4	642.1	744.8	358.1	55.4	22.7	21.6	19.3
77,5°	236.0	205.6	178.8	168.2	183.7	239.0	334.0	387.5	184.9	33.3	17.6	16.7	14.7
80,0°	57.3	42.7	32.7	25.9	19.4	14.6	25.9	30.2	11.7	11.3	12.5	11.9	10.0
82,5°	30.0	22.6	17.5	14.0	10.7	8.3	13.9	16.1	6.8	6.6	7.4	7.1	6.4
85,0°	2.7	2.5	2.3	2.2	2.1	2.0	2.0	2.0	2.0	2.0	2.3	2.4	2.7
87,5°	1.4	1.3	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED				Order number: 5XE1U31Y08CB EAN: 4069025148827								LP number 59536_179			
Table of values for luminous intensities												Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°		
γ	Luminous intensity in cd/klm														
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5		
2,5°	268.8	268.7	268.8	268.9	268.9	269.0	266.5	265.7	264.9	264.3	263.2	262.1	260.9		
5,0°	270.0	269.8	270.0	270.2	270.3	270.5	265.5	264.0	262.3	261.0	259.0	256.8	254.3		
7,5°	268.1	268.0	267.8	268.0	268.1	268.3	264.6	261.7	258.5	254.8	250.1	245.2	240.0		
10,0°	266.2	266.2	265.6	265.7	265.9	266.2	263.7	259.4	254.8	248.5	241.2	233.7	225.8		
12,5°	266.6	266.7	266.6	266.8	267.1	267.4	262.2	256.2	248.7	239.4	229.0	218.0	206.6		
15,0°	267.0	267.3	267.5	267.9	268.3	268.7	260.7	253.0	242.7	230.3	216.7	202.2	187.3		
17,5°	271.9	272.4	272.7	273.3	273.7	274.2	260.0	249.6	236.0	220.1	202.7	184.7	166.5		
20,0°	276.9	277.5	277.9	278.7	279.1	279.7	259.3	246.2	229.2	209.9	188.8	167.2	145.7		
22,5°	285.7	286.0	285.3	285.9	286.0	286.6	256.1	240.7	220.9	197.9	173.1	148.9	124.7		
25,0°	294.5	294.4	292.7	293.2	293.0	293.5	253.0	235.1	212.5	186.0	157.4	130.7	103.7		
27,5°	301.7	299.6	296.6	295.1	294.3	294.5	249.8	229.0	203.1	173.2	142.1	112.9	90.5		
30,0°	308.9	304.7	300.5	297.1	295.6	295.6	246.5	222.9	193.6	160.4	126.8	95.2	77.3		
32,5°	313.0	307.3	302.0	297.5	295.4	295.3	243.8	216.9	184.3	148.5	113.2	85.2	75.5		
35,0°	317.0	310.0	303.6	298.0	295.1	294.9	241.1	211.0	175.1	136.5	99.5	75.1	73.7		
37,5°	317.8	309.7	303.3	296.8	293.1	292.9	227.5	194.9	159.3	122.5	89.6	70.6	71.2		
40,0°	318.5	309.4	303.1	295.7	291.1	290.8	213.8	178.8	143.5	108.6	79.7	66.1	68.6		
42,5°	318.9	309.7	303.7	297.1	292.4	291.8	194.6	156.5	121.9	92.6	71.9	63.8	66.0		
45,0°	319.2	310.1	304.3	298.5	293.8	292.9	175.4	134.2	100.3	76.6	64.1	61.5	63.3		
47,5°	329.8	326.0	323.9	321.0	317.3	316.6	170.5	122.9	87.3	67.9	61.3	60.6	62.1		
50,0°	340.3	341.9	343.4	343.5	340.8	340.4	165.5	111.6	74.4	59.3	58.4	59.8	60.9		
52,5°	405.0	419.9	430.4	434.7	431.6	430.6	167.0	108.2	68.4	56.2	56.5	57.5	57.6		
55,0°	469.7	498.0	517.3	525.9	522.3	520.8	168.4	104.8	62.4	53.0	54.6	55.3	54.3		
57,5°	478.3	480.2	474.1	472.9	468.6	465.7	167.5	102.3	61.0	53.3	50.4	50.0	50.6		
60,0°	486.8	462.4	430.8	419.9	414.9	410.5	166.7	99.7	59.6	53.6	46.2	44.6	46.9		
62,5°	304.6	260.5	238.2	232.6	228.3	225.8	164.6	102.3	71.0	60.8	46.8	42.1	46.4		
65,0°	122.3	58.5	45.5	45.3	41.7	41.1	162.5	104.9	82.5	68.0	47.5	39.6	45.8		
67,5°	75.0	42.9	36.1	36.0	33.8	33.5	171.9	140.1	107.9	72.2	44.8	36.5	43.4		
70,0°	27.6	27.3	26.7	26.8	26.0	25.9	181.3	175.3	133.4	76.4	42.1	33.3	41.1		
72,5°	22.7	22.0	21.3	21.1	20.5	20.3	265.1	189.7	120.0	62.2	33.7	27.5	35.0		
75,0°	17.7	16.6	15.9	15.3	15.0	14.8	348.9	204.0	106.7	47.9	25.3	21.8	29.0		
77,5°	13.1	12.5	11.5	11.1	10.8	10.6	193.6	113.1	59.4	29.8	17.4	15.8	20.3		
80,0°	8.4	8.3	7.2	6.9	6.6	6.5	38.3	22.1	12.2	11.8	9.4	9.8	11.6		
82,5°	5.4	5.2	4.5	4.3	4.1	4.0	20.5	12.5	7.6	7.4	6.0	6.3	7.0		
85,0°	2.3	2.1	1.8	1.7	1.6	1.5	2.8	2.8	2.9	2.9	2.7	2.7	2.5		
87,5°	1.1	1.0	0.9	0.8	0.8	0.7	1.4	1.4	1.5	1.5	1.4	1.4	1.3		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

Photometric test report

Family Streetlight 21 micro LED		Order number: 5XE1U31Y08CB EAN: 4069025148827										LP number 59536_179	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	0.4	0.4
2,5°	259.6	258.4	257.3	256.2	255.1	254.3	253.6	253.0	252.6	252.4	252.3	3.2	3.6
5,0°	251.7	249.4	247.1	244.9	242.7	241.1	239.8	238.5	237.7	237.3	237.2	6.2	9.8
7,5°	234.8	230.1	225.2	220.5	216.3	213.0	210.1	207.9	206.2	205.4	204.8	9.0	18.7
10,0°	217.9	210.8	203.4	196.1	189.9	184.8	180.4	177.3	174.8	173.4	172.5	11.5	30.2
12,5°	195.6	185.0	175.2	166.1	158.0	151.4	146.3	142.8	140.4	139.1	138.4	13.6	43.8
15,0°	173.3	159.2	147.1	136.1	126.1	118.1	112.2	108.3	106.0	104.7	104.3	15.5	59.4
17,5°	149.3	133.3	121.0	111.9	105.2	100.8	98.1	96.7	95.8	95.3	95.2	17.6	76.9
20,0°	125.4	107.5	94.9	87.6	84.4	83.5	84.0	85.2	85.7	85.9	86.1	19.5	96.4
22,5°	105.4	93.2	87.8	86.3	86.0	85.8	85.4	85.1	84.3	83.6	83.3	21.7	118.1
25,0°	85.5	78.9	80.6	84.9	87.6	88.0	86.8	84.9	82.9	81.2	80.5	23.8	141.9
27,5°	81.2	81.9	85.3	88.0	88.0	85.8	82.5	79.3	76.2	74.0	73.1	26.1	168.0
30,0°	77.0	84.8	90.0	91.2	88.3	83.6	78.3	73.6	69.6	66.7	65.7	28.2	196.2
32,5°	79.1	85.7	88.8	87.8	84.1	79.6	75.2	71.9	69.4	67.7	67.1	30.6	226.8
35,0°	81.2	86.7	87.6	84.5	79.9	75.6	72.2	70.2	69.3	68.6	68.4	32.9	259.7
37,5°	76.3	79.2	78.9	77.1	76.1	74.0	71.1	69.2	67.9	67.1	66.7	34.9	294.6
40,0°	71.3	71.6	70.3	69.7	72.4	72.5	70.0	68.2	66.6	65.5	65.1	36.8	331.3
42,5°	67.4	67.5	68.8	69.1	68.9	68.5	66.8	65.5	64.3	63.3	62.9	38.5	369.8
45,0°	63.5	63.4	67.3	68.6	65.4	64.6	63.6	62.8	62.0	61.1	60.7	40.2	410.1
47,5°	62.2	64.8	65.8	64.2	61.6	61.0	60.1	59.3	58.4	57.5	57.2	42.8	452.8
50,0°	60.9	66.1	64.2	59.8	57.9	57.4	56.6	55.8	54.8	53.9	53.6	45.3	498.1
52,5°	59.8	63.6	59.5	55.6	53.9	53.3	52.6	51.7	50.6	49.9	49.7	50.1	548.1
55,0°	58.6	61.0	54.8	51.4	50.0	49.2	48.5	47.6	46.5	45.9	45.9	55.0	603.1
57,5°	57.5	56.2	50.1	47.2	46.0	45.1	44.4	43.8	43.2	42.8	42.8	55.3	658.4
60,0°	56.4	51.4	45.4	43.1	42.0	41.0	40.4	40.0	39.8	39.7	39.6	55.4	713.8
62,5°	54.0	47.8	42.0	39.7	38.3	37.1	36.5	36.0	35.5	35.1	35.0	47.7	761.5
65,0°	51.6	44.2	38.6	36.3	34.6	33.2	32.5	31.9	31.2	30.5	30.5	39.5	800.9
67,5°	48.3	41.4	36.3	33.4	30.6	28.5	27.4	26.5	25.7	25.0	24.9	43.3	844.2
70,0°	45.1	38.6	34.0	30.6	26.6	23.9	22.2	21.1	20.1	19.6	19.4	47.1	891.3
72,5°	38.7	34.3	30.3	25.9	21.5	18.5	16.7	15.5	14.5	14.0	13.8	42.6	933.9
75,0°	32.4	30.0	26.6	21.3	16.4	13.1	11.3	10.0	9.0	8.3	8.1	37.9	971.7
77,5°	22.7	22.3	20.0	15.8	11.7	9.2	7.7	6.6	5.6	4.9	4.7	21.1	992.8
80,0°	13.0	14.5	13.5	10.3	7.0	5.2	4.2	3.1	2.2	1.5	1.3	4.0	996.9
82,5°	7.7	8.3	7.6	6.0	4.2	3.2	2.6	2.0	1.5	1.0	0.9	2.3	999.2
85,0°	2.3	2.1	1.8	1.7	1.5	1.3	1.0	0.8	0.7	0.6	0.6	0.6	999.7
87,5°	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1U31Y08CB EAN: 4069025148827	LP number 59536_179
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2890	19.1	19.7	19.4
95	241	252	2742	18.0	18.6	18.3
90	229	250	2606	17.0	17.6	17.3
85	216	248	2458	15.9	16.4	16.2
80	203	246	2310	14.9	15.4	15.2
75	190	243	2162	13.9	14.3	14.1
70	178	241	2025	12.9	13.3	13.1
65	165	238	1877	11.9	12.3	12.1
60	152	235	1729	11.0	11.3	11.2
55	140	232	1593	10.1	10.4	10.2
50	127	229	1445	9.2	9.5	9.4
45	114	225	1297	8.3	8.5	8.4
40	102	221	1161	7.4	7.6	7.5
35	89	216	1013	6.6	6.7	6.6
30	76	210	865	5.7	5.9	5.8
25	63	203	717	4.9	5.0	5.0
20	51	195	580	4.0	4.2	4.1
15	38	184	432	3.1	3.2	3.2
10	25	169	284	2.0	2.1	2.0

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2890	19.0	19.6	19.3
95	241	252	2742	17.9	18.5	18.2
90	229	250	2606	16.9	17.5	17.2
85	216	248	2458	15.9	16.4	16.2
80	203	246	2310	14.9	15.3	15.1
75	191	244	2173	13.9	14.3	14.1
70	178	241	2025	12.9	13.3	13.1
65	165	238	1877	12.0	12.3	12.2
60	152	235	1729	11.0	11.3	11.2
55	140	232	1593	10.1	10.4	10.2
50	127	229	1445	9.2	9.5	9.4
45	114	225	1297	8.3	8.5	8.4
40	102	221	1161	7.4	7.7	7.6
35	89	216	1013	6.6	6.8	6.7
30	76	210	865	5.7	5.9	5.8
25	64	204	728	5.0	5.1	5.0
20	51	195	580	4.1	4.2	4.2
15	38	184	432	3.1	3.2	3.2
10	25	169	284	2.1	2.1	2.1

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1U31Y08CB EAN: 4069025148827	LP number 59536_179
Dimming levels table		environmental temperature: 15°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2890	19.1	19.6	19.4
95	241	252	2742	18.0	18.5	18.2
90	229	250	2605	17.0	17.5	17.2
85	216	248	2458	15.9	16.4	16.2
80	203	246	2310	14.8	15.3	15.0
75	191	244	2173	14.0	14.3	14.2
70	178	241	2025	12.9	13.3	13.1
65	165	238	1877	11.9	12.3	12.1
60	152	235	1729	11.0	11.3	11.2
55	140	232	1593	10.1	10.4	10.2
50	127	229	1445	9.2	9.5	9.4
45	114	225	1297	8.3	8.5	8.4
40	102	221	1161	7.5	7.6	7.6
35	89	216	1013	6.5	6.7	6.6
30	76	210	865	5.7	5.9	5.8
25	64	204	728	4.9	5.1	5.0
20	51	195	580	4.1	4.2	4.2
15	38	184	432	3.0	3.1	3.0
10	25	169	284	2.0	2.1	2.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1U31Y08CB EAN: 4069025148827	LP number 59536_179
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	2890.0	19.1
5.0	2890.0	19.0
15.0	2890.0	19.1