

Photometric test report

Family Streetlight 21 mini LED

Order number: 5XE2V31Y08JB
EAN: 4069025150448

LP number
59540_14

serial
documentation
18.01.2024



Version	post-top or side-entry mounting, Smart Interface up/down
Optic	asymmetric, extremely wide distribution (P0.5a G)
Cover	toughened safety glass
Lamps	LED 3000 K CRI ≥ 70
Controlgear	EVG SITECO iQ - Smart Interface
Rated values	Net luminous flux = 11020 lm Power consumption = 72.5 W Luminous efficacy = 152 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 308 cd/klm

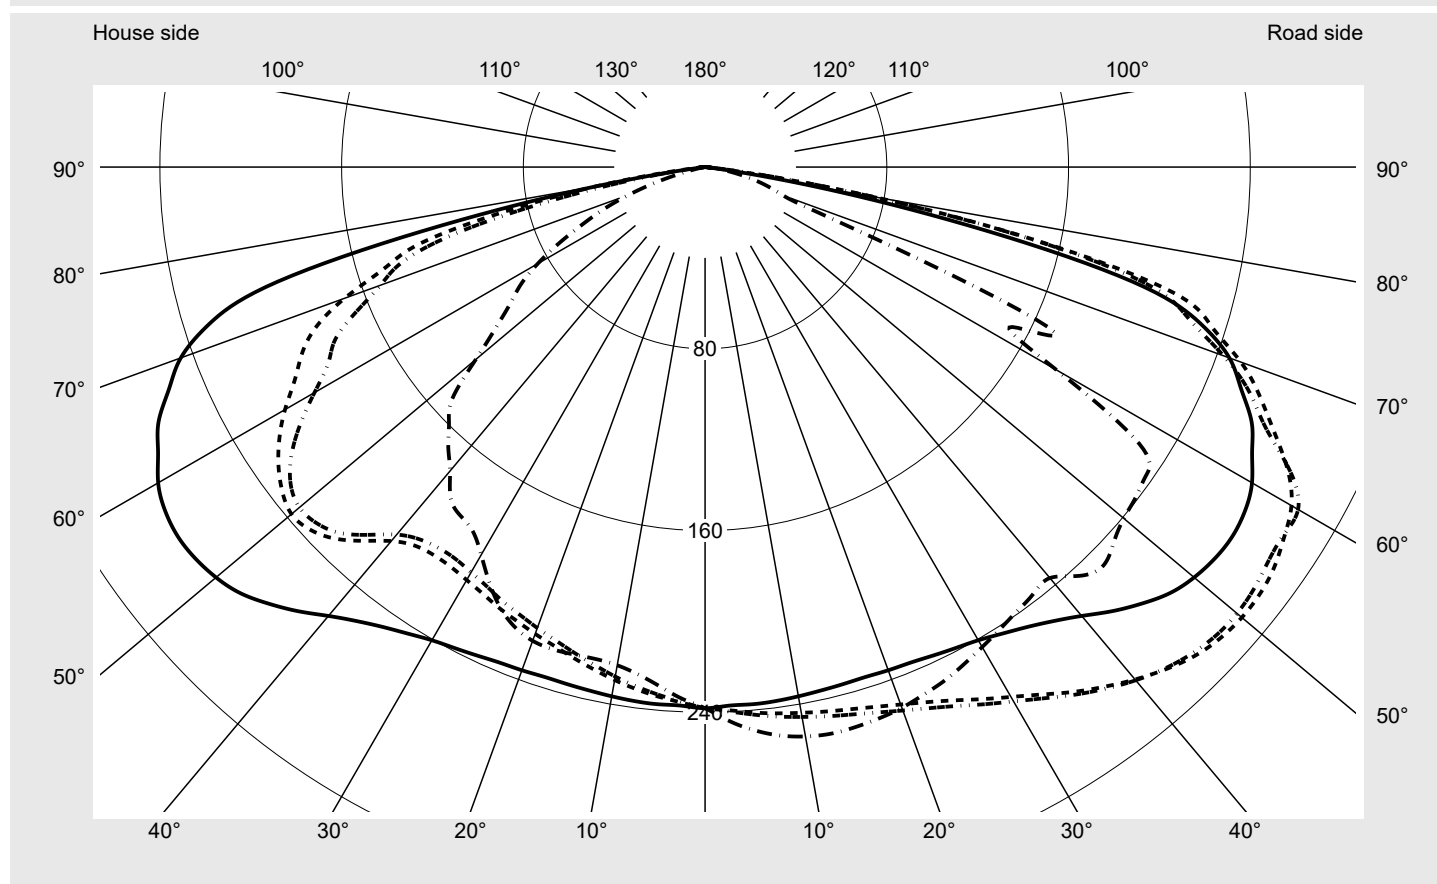

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	256.5
Imax 80°	74.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 mini LED

Order number: **5XE2V31Y08JB**
EAN: **4069025150448**

LP number
59540_14

Envelope curve in cd/klm


KMK 50°

KMK 47.5°

KMK 45°

KMK 42.5°

siteco

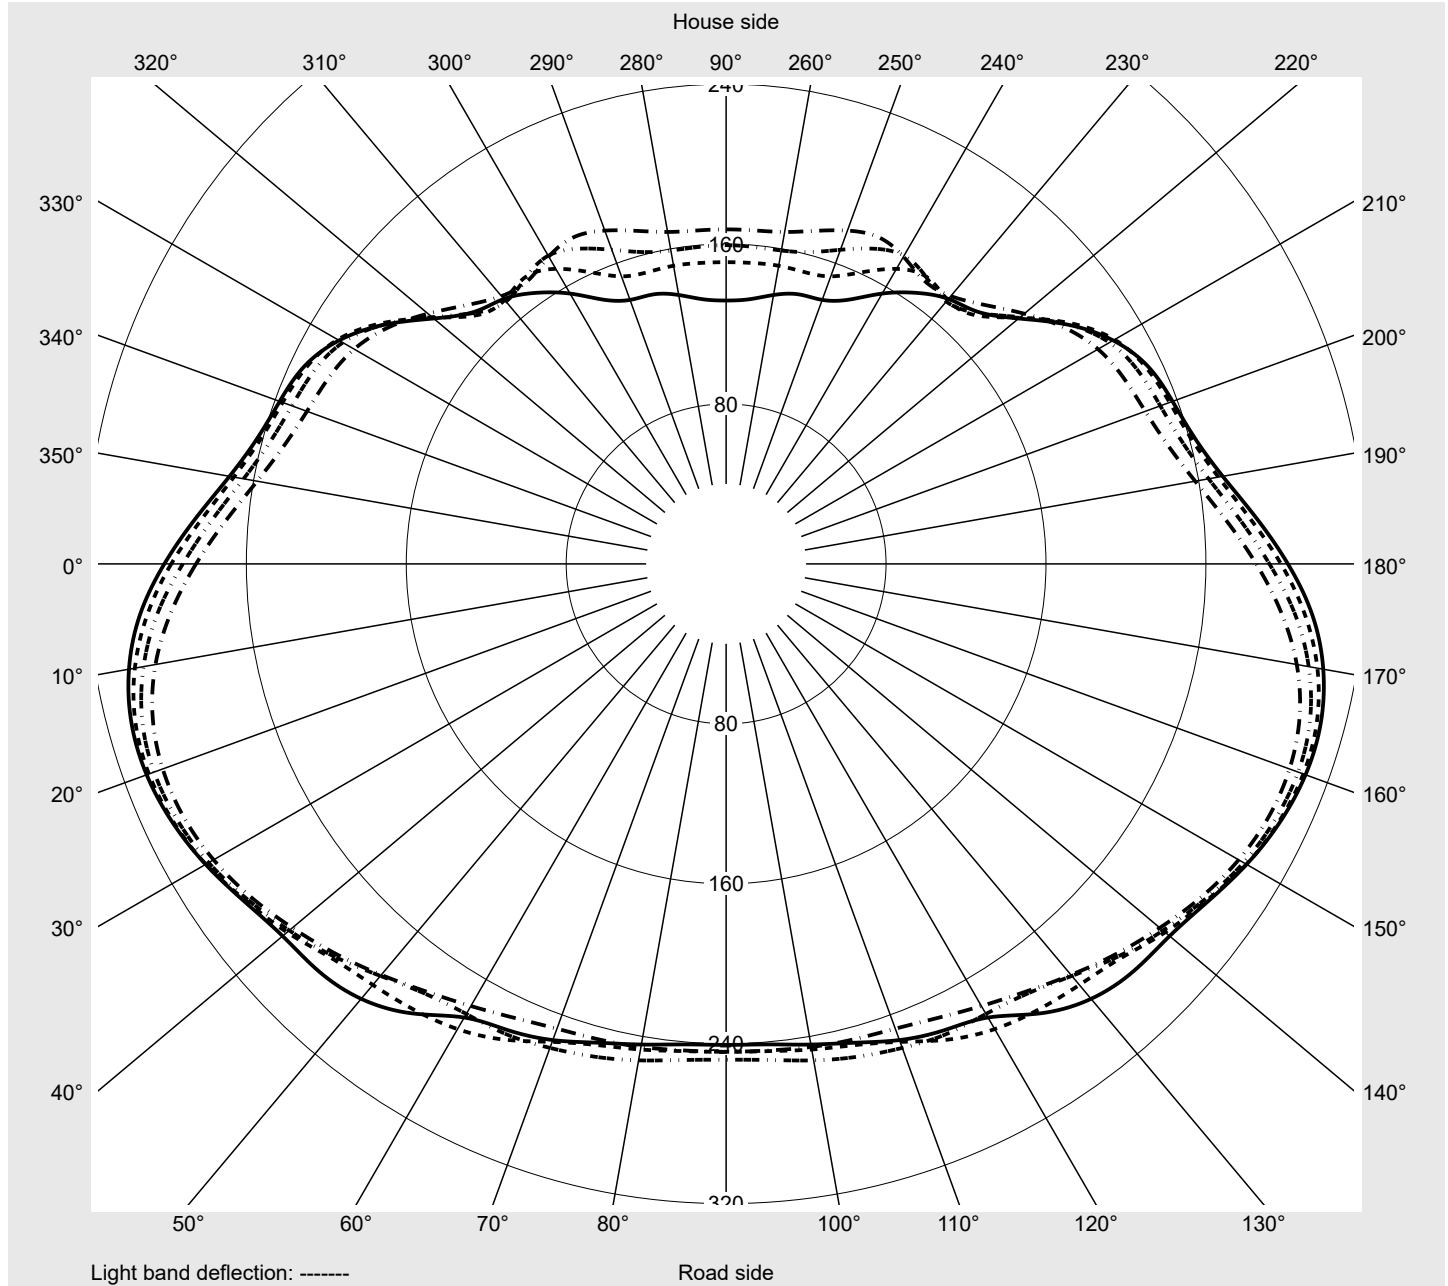

Photometric test report

Family Streetlight 21 mini LED		Order number: 5XE2V31Y08JB EAN: 4069025150448										LP number 59540_14	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	237.3	237.5	238.1	238.8	239.3	239.9	240.2	240.7	241.5	241.7	242.0	242.5	242.9
5,0°	237.4	238.0	238.8	239.9	241.0	241.9	242.7	243.5	244.6	245.2	245.8	246.5	247.1
7,5°	237.1	238.2	239.5	241.0	242.5	244.0	245.1	246.2	247.5	248.4	249.3	250.0	250.6
10,0°	236.6	238.2	239.9	241.9	243.9	245.8	247.4	248.6	250.0	251.1	252.0	252.6	253.2
12,5°	236.0	238.3	240.4	243.0	245.5	247.6	249.4	250.9	252.2	253.3	254.1	254.7	255.0
15,0°	235.6	238.5	241.1	244.2	247.1	249.5	251.5	253.1	254.1	255.1	255.8	256.2	256.2
17,5°	235.3	239.0	242.1	245.7	249.2	251.8	253.9	255.5	256.4	257.0	257.4	257.2	256.9
20,0°	235.7	240.1	243.9	248.0	251.8	254.6	256.7	258.1	258.5	258.7	258.6	258.0	257.4
22,5°	236.2	241.5	246.0	250.8	255.0	257.8	259.6	260.5	260.4	260.0	259.4	258.4	257.3
25,0°	237.3	243.5	248.9	254.5	259.0	261.8	262.9	262.9	262.2	261.3	260.2	258.6	257.0
27,5°	238.7	246.0	252.9	259.4	264.0	266.6	267.1	266.4	264.7	262.7	260.7	258.6	256.6
30,0°	240.5	249.4	257.8	264.7	269.3	271.6	271.4	269.9	267.6	264.6	261.5	258.8	256.5
32,5°	243.5	253.9	263.5	270.7	275.3	277.3	276.5	274.3	270.9	266.8	262.8	259.6	256.7
35,0°	247.2	259.5	270.1	277.6	282.1	283.6	282.1	279.0	274.6	269.3	264.8	260.4	256.5
37,5°	251.9	265.3	276.5	284.1	288.4	289.4	287.5	283.6	277.9	271.9	266.1	260.9	256.4
40,0°	257.9	272.0	283.3	290.8	294.5	294.9	292.3	287.5	280.9	274.1	267.3	261.3	255.9
42,5°	265.2	278.8	289.9	297.0	299.9	299.5	296.1	290.4	283.2	275.9	268.4	261.2	255.4
45,0°	271.8	285.6	295.9	302.4	304.5	303.0	298.9	292.4	285.3	277.6	269.0	262.5	260.0
47,5°	277.6	290.6	300.3	305.9	307.3	305.1	300.6	293.5	286.7	279.0	274.9	272.2	268.7
50,0°	281.0	294.4	303.3	308.0	308.5	305.7	300.6	294.3	289.6	288.2	284.0	274.4	262.0
52,5°	282.9	296.1	304.6	308.3	308.1	304.7	299.6	297.0	297.9	293.2	280.2	268.9	260.6
55,0°	283.4	296.4	304.5	307.4	306.1	302.7	301.1	302.7	299.0	287.3	277.3	263.0	250.2
57,5°	281.8	294.2	302.3	304.6	302.4	301.8	305.3	302.8	291.1	282.3	265.6	251.7	240.8
60,0°	278.0	289.6	297.4	299.9	298.1	301.4	306.7	298.1	285.4	267.5	252.7	240.4	231.1
62,5°	271.5	282.8	289.9	292.5	289.2	290.5	292.2	289.3	274.8	251.5	238.4	226.6	217.3
65,0°	265.5	275.5	281.2	283.0	276.6	272.6	272.7	269.1	253.6	232.0	217.9	208.5	203.1
67,5°	255.5	265.6	270.2	271.0	264.5	259.5	258.9	247.4	230.6	208.1	193.8	187.1	185.3
70,0°	245.6	253.4	256.5	255.8	251.0	242.8	232.3	218.1	200.6	183.2	168.1	164.4	158.1
72,5°	228.5	234.6	236.2	235.1	233.9	223.7	206.6	186.8	169.6	156.3	143.4	138.9	120.8
75,0°	194.7	195.1	199.0	209.9	213.2	203.6	180.2	156.3	139.6	128.8	118.9	109.7	86.9
77,5°	118.9	121.4	127.9	140.9	149.5	148.0	139.4	124.1	109.0	97.7	88.2	79.3	61.2
80,0°	48.4	49.8	59.9	70.1	74.5	72.8	73.8	68.2	62.2	64.4	61.2	53.2	40.3
82,5°	5.9	5.6	6.9	11.1	15.0	19.9	24.6	26.8	29.1	29.4	28.1	28.6	21.9
85,0°	2.4	2.3	2.3	2.3	2.2	2.2	2.1	2.8	5.0	6.4	7.9	7.6	6.5
87,5°	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED		Order number: 5XE2V31Y08JB EAN: 4069025150448										LP number 59540_14	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	243.1	243.3	243.5	243.7	244.0	244.1	237.0	236.3	236.1	236.0	235.7	235.4	235.1
5,0°	247.5	247.7	248.2	248.5	248.7	248.9	236.4	235.2	234.6	234.0	233.2	232.7	232.1
7,5°	251.1	251.3	251.7	252.1	252.3	252.4	235.6	234.0	232.8	231.8	230.6	229.8	228.8
10,0°	253.6	253.7	254.0	254.3	254.5	254.5	234.4	232.3	230.7	229.3	227.7	226.4	225.4
12,5°	255.2	255.1	255.2	255.4	255.5	255.5	233.2	230.5	228.3	226.5	224.5	223.1	222.0
15,0°	256.0	255.7	255.5	255.5	255.3	255.2	232.0	228.8	226.1	223.7	221.5	220.0	218.8
17,5°	256.4	255.7	255.2	254.9	254.6	254.5	231.1	227.2	224.0	221.0	218.5	216.8	215.8
20,0°	256.4	255.4	254.5	253.9	253.5	253.3	230.6	226.1	222.2	218.7	215.9	214.1	213.2
22,5°	256.1	254.8	253.4	252.3	251.7	251.4	230.4	225.2	220.5	216.3	213.3	211.4	210.7
25,0°	255.5	253.9	252.2	250.6	249.8	249.4	230.5	224.3	218.9	214.2	210.9	208.9	208.1
27,5°	254.6	252.6	250.7	248.6	247.2	246.8	230.6	223.7	217.2	211.8	208.1	206.1	205.4
30,0°	254.1	251.5	248.9	246.5	244.5	244.0	231.7	223.3	215.8	209.9	206.0	203.9	203.6
32,5°	253.8	250.5	247.2	244.2	242.0	241.4	233.2	223.4	215.0	208.6	204.5	202.8	202.8
35,0°	253.1	249.3	245.3	242.1	239.8	239.0	235.9	224.7	215.1	208.4	204.6	203.2	203.1
37,5°	252.2	248.0	243.9	240.6	237.9	237.1	239.1	226.9	216.7	210.0	206.5	204.9	203.8
40,0°	251.1	246.5	242.5	239.3	236.9	236.2	244.5	231.5	221.4	214.9	211.2	208.5	204.5
42,5°	250.6	247.4	246.2	245.4	244.3	244.1	251.0	238.3	228.9	223.2	219.6	214.8	206.2
45,0°	259.7	257.6	255.2	252.2	249.1	248.0	257.8	245.1	236.2	231.1	227.7	221.4	208.7
47,5°	262.6	254.5	249.2	246.7	244.6	244.1	262.9	250.1	241.1	236.1	232.0	224.4	210.0
50,0°	257.5	253.5	248.0	244.1	241.3	240.6	266.1	252.3	242.8	237.7	233.1	223.6	208.6
52,5°	251.2	244.9	242.1	240.7	239.3	238.9	266.9	251.8	241.0	234.6	229.9	219.4	203.8
55,0°	243.2	238.5	237.3	237.6	236.9	236.9	267.2	250.9	238.0	229.3	222.4	210.0	194.8
57,5°	234.8	231.1	231.4	231.5	228.4	226.6	265.9	248.8	234.0	222.2	211.5	194.5	178.5
60,0°	224.0	222.1	219.2	203.5	185.6	178.7	262.4	244.0	227.9	213.5	198.5	177.2	155.0
62,5°	211.1	203.0	179.8	157.1	151.1	152.4	255.7	235.9	219.2	203.8	187.0	161.9	138.0
65,0°	192.2	167.0	147.6	160.8	169.6	166.4	248.1	226.8	210.5	196.1	179.7	152.0	125.4
67,5°	160.4	132.9	139.7	112.6	79.6	70.0	238.5	217.0	201.7	186.0	166.0	137.5	102.2
70,0°	124.2	113.5	80.1	43.1	37.5	36.7	228.2	207.7	189.6	168.8	152.1	121.0	79.1
72,5°	94.2	70.4	34.4	31.3	30.3	30.0	213.8	196.5	166.3	147.8	140.2	97.8	60.8
75,0°	68.8	33.0	24.9	24.6	23.8	23.5	185.0	166.1	133.3	129.6	114.8	74.9	40.4
77,5°	42.1	18.9	17.8	17.5	16.7	16.4	125.5	104.8	84.8	89.9	72.8	40.0	22.4
80,0°	20.7	11.7	11.4	10.9	10.4	10.2	49.6	44.0	43.6	48.4	32.4	14.5	12.4
82,5°	9.2	6.5	6.2	6.1	5.7	5.6	6.8	6.4	10.9	13.5	8.3	5.6	5.7
85,0°	2.9	2.5	2.5	2.4	2.3	2.2	2.4	2.4	2.4	2.4	2.3	2.2	2.1
87,5°	0.9	0.8	0.9	0.8	0.8	0.8	1.3	1.3	1.3	1.3	1.3	1.3	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED		Order number: 5XE2V31Y08JB EAN: 4069025150448										LP number 59540_14	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	0.4	0.4
2,5°	234.8	234.7	234.6	234.3	234.3	234.4	234.5	234.3	234.3	234.2	234.2	2.8	3.2
5,0°	231.3	231.0	230.6	230.1	229.9	229.8	229.7	229.6	229.4	229.4	229.4	5.7	8.9
7,5°	227.9	227.2	226.7	226.2	225.8	225.7	225.5	225.3	225.2	225.3	225.3	8.5	17.4
10,0°	224.2	223.7	223.2	222.7	222.5	222.5	222.4	222.4	222.5	222.6	222.7	11.3	28.7
12,5°	220.9	220.4	220.2	220.2	220.3	220.5	220.8	221.1	221.4	221.7	221.9	14.1	42.8
15,0°	218.0	217.8	218.1	218.5	219.1	219.7	220.3	220.9	221.6	222.0	222.2	16.8	59.6
17,5°	215.5	215.7	216.3	217.2	218.2	219.2	220.1	221.0	221.9	222.4	222.6	19.5	79.1
20,0°	213.3	213.9	214.9	216.1	217.4	218.4	219.3	220.3	221.1	221.7	221.9	22.2	101.2
22,5°	211.0	211.7	213.0	214.3	215.5	216.4	217.1	217.7	218.3	218.9	219.1	24.7	125.9
25,0°	208.4	209.5	210.8	212.0	212.8	213.1	213.1	213.0	213.1	213.4	213.7	27.2	153.2
27,5°	206.1	207.2	208.3	208.7	208.3	207.6	206.7	206.2	205.8	205.7	205.9	29.6	182.8
30,0°	204.5	205.4	205.3	204.4	202.8	200.8	199.0	197.7	197.2	196.9	197.1	31.9	214.7
32,5°	203.4	203.2	201.5	198.8	195.6	192.4	190.2	189.2	189.2	189.8	190.2	34.2	248.8
35,0°	202.5	199.9	195.9	191.3	186.9	183.7	183.2	184.2	185.8	187.0	187.5	36.4	285.3
37,5°	200.6	195.5	189.2	183.4	179.5	178.6	181.2	183.8	184.5	184.1	183.9	38.8	324.0
40,0°	198.0	189.6	181.5	176.2	175.6	179.2	182.3	180.9	177.6	175.3	174.7	41.1	365.1
42,5°	194.7	183.2	174.9	172.9	177.5	180.3	177.4	172.5	168.6	167.4	167.3	43.5	408.6
45,0°	192.0	177.6	171.3	174.8	178.0	174.0	167.2	161.5	159.2	159.1	159.4	45.9	454.5
47,5°	191.5	176.0	172.4	175.1	170.4	161.0	153.1	151.1	151.4	151.1	150.9	47.9	502.4
50,0°	191.0	178.3	173.0	165.5	156.1	145.9	140.5	139.6	136.6	132.9	131.7	49.3	551.6
52,5°	188.5	178.4	165.3	151.1	137.1	128.7	128.3	125.6	119.8	116.5	116.0	50.0	601.7
55,0°	180.5	166.4	147.4	130.9	119.3	117.7	116.1	110.0	105.8	104.4	104.7	50.3	651.9
57,5°	160.7	141.9	126.3	112.6	107.9	108.0	101.5	97.5	96.5	95.8	96.2	49.8	701.7
60,0°	137.1	120.9	107.9	100.7	100.2	95.4	88.5	86.8	86.3	85.0	85.1	48.3	750.0
62,5°	120.2	105.6	96.5	93.8	89.2	80.7	76.1	75.2	74.5	72.5	72.3	46.0	796.0
65,0°	103.2	92.1	87.2	82.7	74.1	66.9	63.7	62.8	63.5	59.8	59.3	43.9	839.8
67,5°	79.9	73.1	69.4	64.1	58.1	54.4	51.9	51.9	53.0	49.0	48.0	39.6	879.5
70,0°	59.9	55.4	52.2	49.6	47.6	45.3	41.9	41.0	41.2	36.5	35.7	34.9	914.4
72,5°	44.5	42.2	40.2	39.5	38.4	35.2	31.1	29.9	28.7	24.4	23.5	30.4	944.8
75,0°	32.9	31.4	31.0	30.7	29.2	25.4	20.6	18.2	15.7	12.8	12.1	25.2	969.9
77,5°	22.0	21.6	20.9	19.9	17.6	14.7	11.7	9.7	7.7	5.2	5.0	17.3	987.2
80,0°	11.8	11.1	10.5	9.8	8.8	7.5	6.0	4.8	3.6	2.0	1.8	8.9	996.1
82,5°	5.5	5.1	4.9	4.6	4.3	3.7	3.0	2.4	1.8	1.1	1.0	2.9	999.0
85,0°	2.0	1.9	1.9	1.8	1.6	1.4	1.2	1.1	0.9	0.8	0.7	0.7	999.7
87,5°	1.1	1.1	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31Y08JB EAN: 4069025150448	LP number 59540_14
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	11020	72.5	75.7	74.1
95	241	252	10456	67.9	70.8	69.4
90	229	250	9935	63.8	66.6	65.2
85	216	248	9371	59.5	61.9	60.7
80	203	246	8807	55.3	57.5	56.4
75	190	243	8243	51.2	53.2	52.2
70	178	241	7723	47.4	49.4	48.4
65	165	238	7159	43.5	45.3	44.4
60	152	235	6595	39.7	41.3	40.5
55	140	232	6074	36.3	37.7	37.0
50	127	229	5510	32.7	34.0	33.4
45	114	225	4946	29.2	30.3	29.8
40	102	221	4425	26.0	27.0	26.5
35	89	216	3861	22.6	23.6	23.1
30	76	210	3297	19.5	20.2	19.8
25	63	203	2733	16.3	16.9	16.6
20	51	195	2213	13.4	13.9	13.6
15	38	184	1649	10.4	10.7	10.6
10	25	169	1085	7.2	7.4	7.3

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	11020	71.2	73.0	72.1
95	241	252	10455	66.9	68.5	67.7
90	229	250	9935	62.9	64.5	63.7
85	216	248	9371	58.7	60.2	59.4
80	203	246	8807	54.7	55.9	55.3
75	191	244	8286	51.0	52.2	51.6
70	178	241	7722	47.1	48.2	47.7
65	165	238	7158	43.3	44.3	43.8
60	152	235	6594	39.6	40.5	40.0
55	140	232	6074	36.2	37.0	36.6
50	127	229	5510	32.6	33.4	33.0
45	114	225	4946	29.2	29.8	29.5
40	102	221	4425	26.0	26.6	26.3
35	89	216	3861	22.7	23.2	23.0
30	76	210	3297	19.5	19.9	19.7
25	64	204	2777	16.6	16.9	16.8
20	51	195	2213	13.5	13.8	13.6
15	38	184	1649	10.5	10.7	10.6
10	25	169	1085	7.2	7.3	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31Y08JB EAN: 4069025150448	LP number 59540_14
Dimming levels table		environmental temperature: 15°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	11020	71.7	74.8	73.2
95	241	252	10456	67.3	70.1	68.7
90	229	250	9936	63.2	65.8	64.5
85	216	248	9372	59.1	61.4	60.2
80	203	246	8808	54.9	57.0	56.0
75	190	243	8244	50.8	52.8	51.8
70	178	241	7723	47.3	49.1	48.2
65	165	238	7159	43.3	45.1	44.2
60	152	235	6595	39.6	41.1	40.4
55	140	232	6074	36.2	37.6	36.9
50	127	229	5510	32.6	33.8	33.2
45	114	225	4946	29.2	30.2	29.7
40	102	221	4426	26.0	26.9	26.4
35	89	216	3861	22.7	23.5	23.1
30	76	210	3297	19.4	20.1	19.8
25	63	203	2733	16.3	16.9	16.6
20	51	195	2213	13.5	13.9	13.7
15	38	184	1649	10.4	10.7	10.6
10	25	169	1085	7.1	7.4	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31Y08JB EAN: 4069025150448	LP number 59540_14
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	11020.0	72.5
5.0	11020.0	71.2
15.0	11020.0	71.7