

Photometric test report

Family
DL 11 iQ

Order number: 5XA5565CF14H000022
EAN: 4058352955789

LP number
59430_76



Version post-top- or mounting to wall arm
Optic direct, symmetric wide distribution
C120010
Cover cover transparent, PMMA
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 3000 lm
Power consumption = 23.9 W
Luminous efficacy = 125.5 lm/W

serial
documentation
01.02.2024

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 387 cd/klm

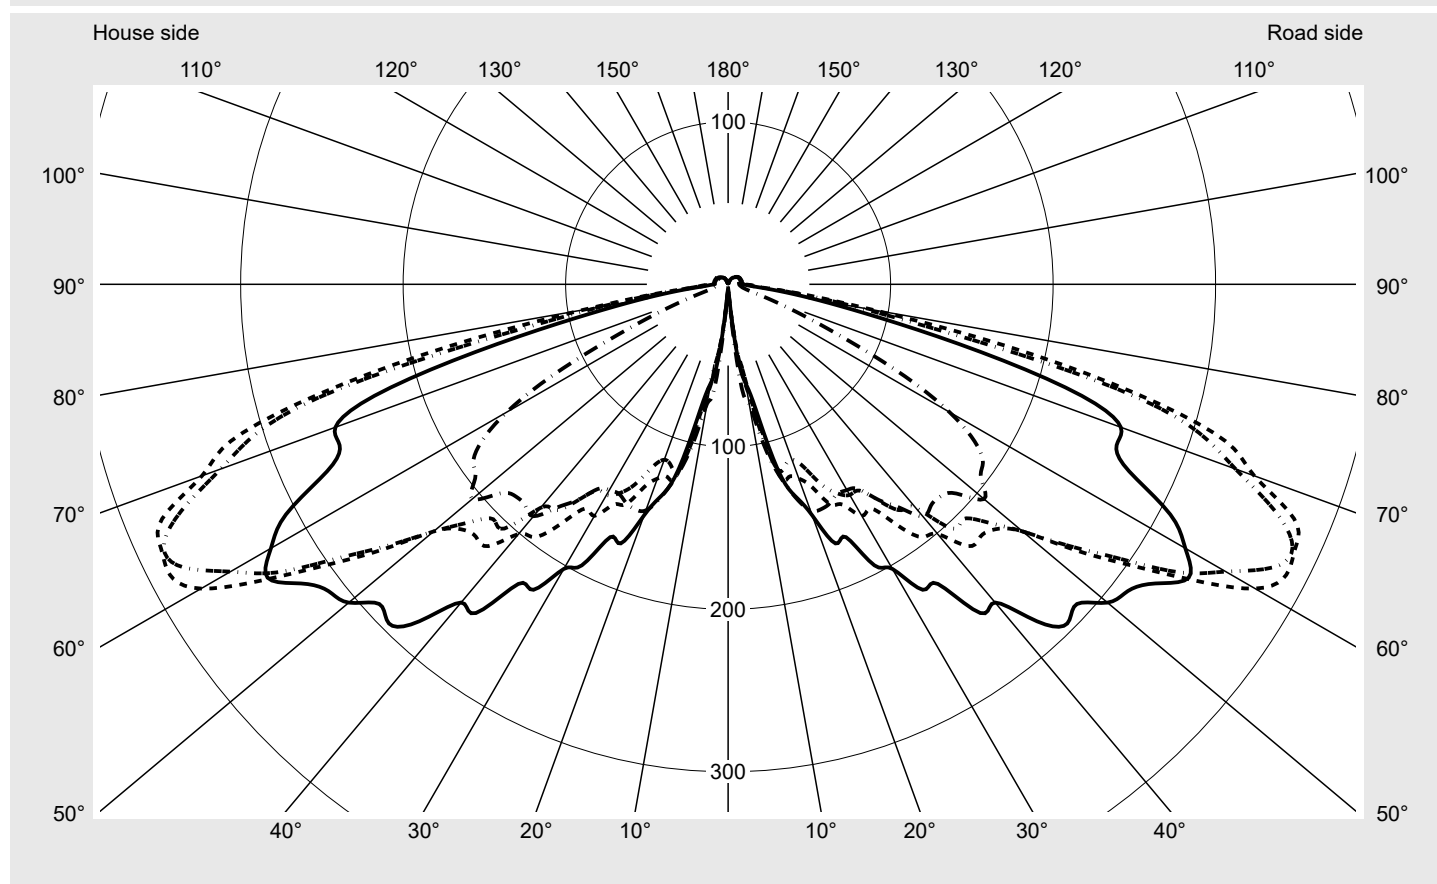

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	96.0%
Eta 90° - 180°	4.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	344.6
Imax 80°	91.8
Imax 90°	9.3
Imax >90°	8.9
Imax >95°	8.8

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
DL 11 iQ

Order number: 5XA5565CF14H000022
EAN: 4058352955789

LP number
59430_76

Envelope curve in cd/klm

KMK 62.5°


KMK 60°

KMK 57.5°

KMK 55°

sit

eco

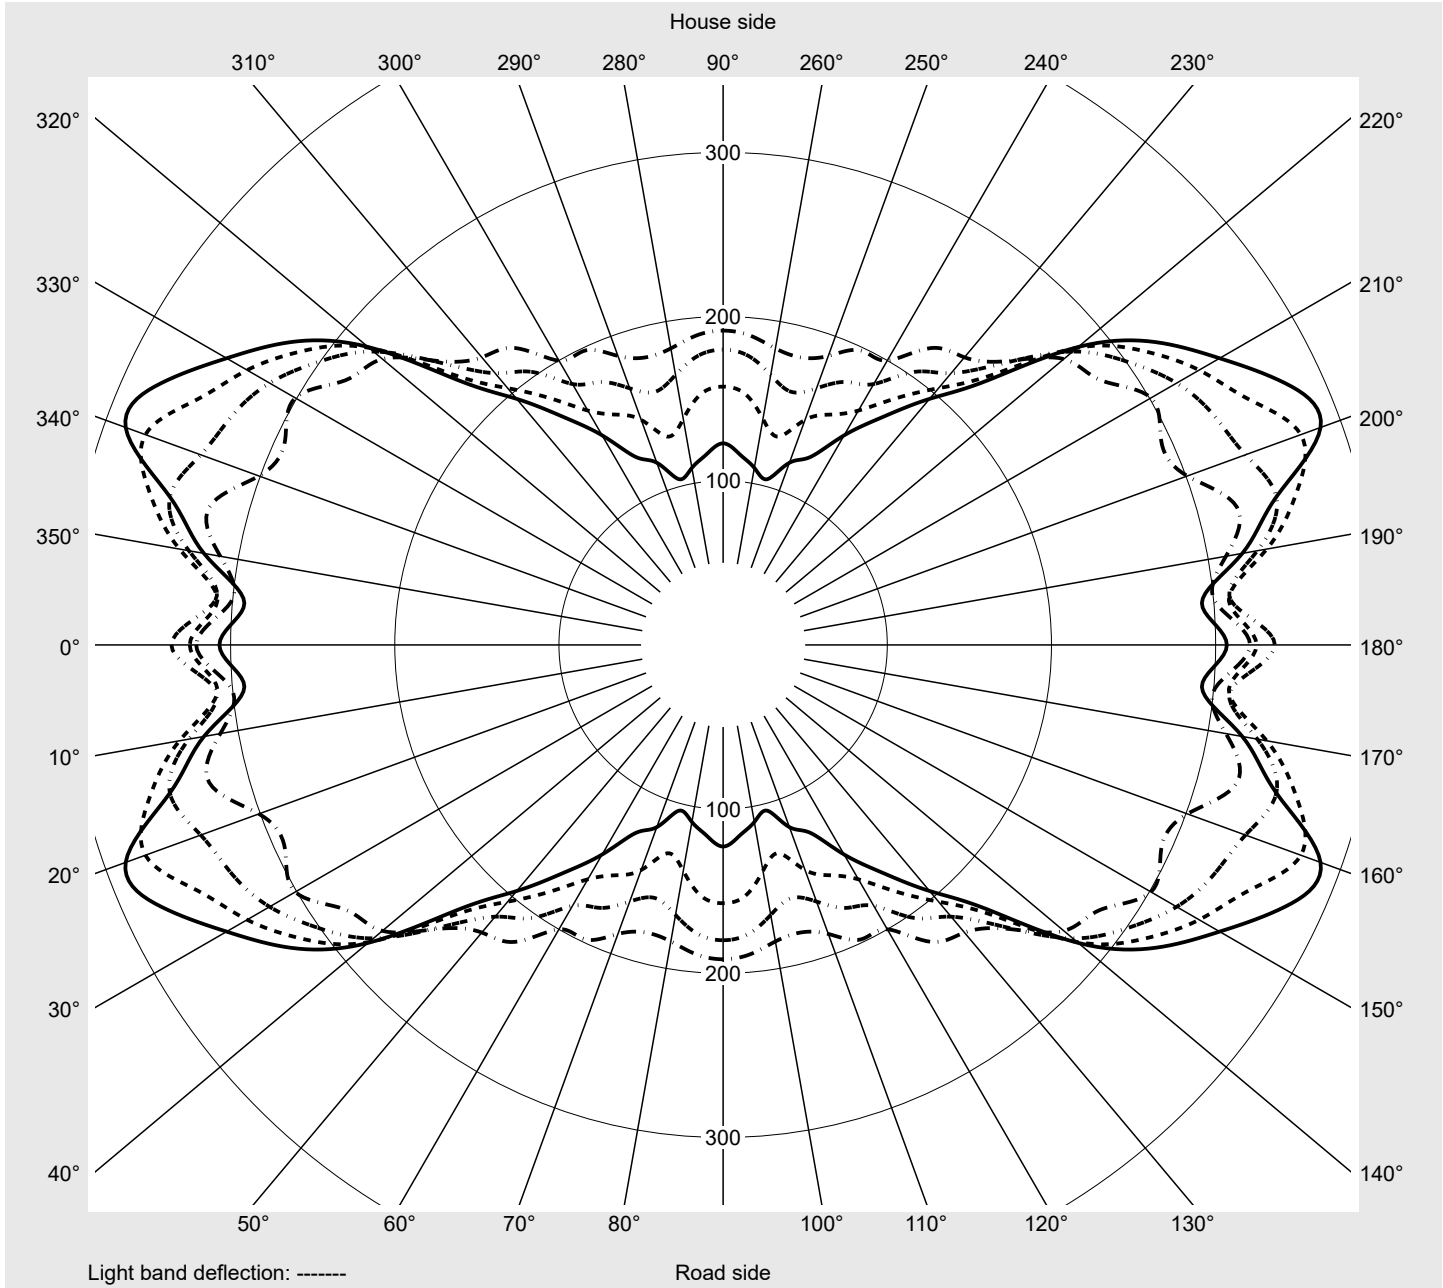

Photometric test report

Family DL 11 iQ	Order number: 5XA5565CF14H000022 EAN: 4058352955789	LP number 59430_76
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	5° 175° 185° 355°	10° 170° 190° 350°	15° 165° 195° 345°	20° 160° 200° 340°	25° 155° 205° 335°	30° 150° 210° 330°	35° 145° 215° 325°	40° 140° 220° 320°	45° 135° 225° 315°
γ	Luminous intensity in cd/klm									
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	4.6	4.6	4.7	4.8	4.8	4.8	4.9	5.0	5.1	5.2
5,0°	10.5	10.4	10.6	11.0	12.4	14.1	15.7	17.0	17.9	18.1
7,5°	45.5	45.3	44.7	42.6	40.4	38.9	37.5	36.1	35.8	36.3
10,0°	61.9	62.7	64.4	66.2	64.1	57.5	52.3	50.2	52.5	57.2
12,5°	79.0	78.2	78.3	81.0	86.1	93.3	98.4	98.7	94.3	88.5
15,0°	117.9	111.3	111.1	117.0	121.4	118.0	109.8	108.9	112.7	114.3
17,5°	136.4	126.2	122.9	129.5	124.3	116.9	114.7	114.9	116.0	115.4
20,0°	151.3	138.4	135.3	134.8	127.2	114.9	111.9	108.3	107.8	108.3
22,5°	172.6	154.6	147.9	150.4	135.1	121.7	115.4	111.4	108.0	109.6
25,0°	171.7	154.5	155.7	162.0	149.5	136.0	126.3	118.4	116.6	116.6
27,5°	195.0	173.0	164.6	168.8	152.9	144.9	138.3	126.7	124.6	127.0
30,0°	202.3	181.6	184.3	182.7	164.5	149.7	141.1	138.4	140.5	140.2
32,5°	222.9	190.1	190.0	184.3	163.6	150.5	136.1	135.9	145.6	152.2
35,0°	225.1	202.5	208.0	196.8	180.4	163.1	156.9	156.7	161.6	169.1
37,5°	255.0	222.6	222.6	212.9	196.1	175.2	162.6	167.5	174.2	177.9
40,0°	255.6	224.3	229.5	218.4	200.6	179.5	177.3	182.7	189.1	196.6
42,5°	281.3	237.4	246.3	235.0	218.5	203.9	201.3	208.5	209.7	216.2
45,0°	295.2	255.8	260.1	241.7	219.6	204.4	205.8	219.0	225.3	228.7
47,5°	291.2	258.3	261.1	246.1	223.1	217.0	224.2	238.3	237.7	232.4
50,0°	304.8	275.2	282.5	265.7	236.6	236.6	247.7	248.5	241.6	236.7
52,5°	310.1	286.0	299.1	301.9	268.2	264.4	266.6	265.9	252.8	241.6
55,0°	321.0	300.9	311.0	324.1	300.9	294.4	300.9	281.0	270.9	244.5
57,5°	336.1	310.5	330.4	348.8	338.6	330.1	319.0	300.7	278.0	243.0
60,0°	324.9	309.2	336.3	361.9	374.5	353.6	334.8	312.3	281.5	233.0
62,5°	306.8	292.7	321.1	349.0	387.3	377.5	349.2	321.6	282.3	227.9
65,0°	272.3	257.2	308.3	353.8	385.0	383.2	356.5	315.4	274.3	223.9
67,5°	258.8	228.2	285.8	335.2	377.0	364.2	351.5	308.1	260.9	208.8
70,0°	257.2	232.3	277.0	328.7	344.6	332.3	319.5	277.2	231.4	192.9
72,5°	228.3	225.8	253.9	307.0	320.9	303.8	256.0	235.0	191.5	152.8
75,0°	161.2	177.4	218.7	262.4	260.0	246.5	194.6	168.1	127.3	107.7
77,5°	96.8	105.7	141.8	175.4	175.2	142.2	115.2	101.1	86.9	77.4
80,0°	57.2	62.3	80.8	91.8	90.5	79.4	77.9	77.1	61.0	45.8
82,5°	32.1	35.0	39.6	45.1	45.6	41.4	50.2	54.0	43.9	30.2
85,0°	16.6	17.3	17.6	18.8	18.3	21.1	30.7	34.1	27.1	16.5
87,5°	11.5	11.9	13.0	14.0	13.9	15.3	17.6	16.7	13.3	10.6
90,0°	8.5	8.7	9.2	9.3	9.2	9.2	9.1	9.0	8.7	8.5
92,5°	8.2	8.5	8.9	8.9	8.8	8.7	8.5	8.3	8.1	7.9
95,0°	8.2	8.5	8.8	8.8	8.8	8.5	8.4	8.2	8.0	7.8
97,5°	8.2	8.5	8.8	8.8	8.7	8.6	8.4	8.2	8.0	7.8
100,0°	8.2	8.4	8.8	8.8	8.7	8.5	8.4	8.2	8.0	7.8
102,5°	8.0	8.3	8.7	8.7	8.6	8.5	8.4	8.2	8.0	7.8
105,0°	8.0	8.3	8.6	8.7	8.6	8.5	8.3	8.2	8.0	7.8
107,5°	7.8	8.2	8.5	8.6	8.5	8.4	8.3	8.1	7.9	7.7
110,0°	7.8	8.1	8.4	8.5	8.5	8.3	8.2	8.0	7.9	7.7

Photometric test report

Family DL 11 iQ	Order number: 5XA5565CF14H000022 EAN: 4058352955789	LP number 59430_76
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	50° 130° 230° 310°	55° 125° 235° 305°	60° 120° 240° 300°	65° 115° 245° 295°	70° 110° 250° 290°	75° 105° 255° 285°	80° 100° 260° 280°	85° 95° 265° 275°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm									Luminous flux in lm/klm	
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	0.0	0.0
2,5°	5.3	5.4	5.7	5.8	5.7	5.7	5.7	5.7	5.7	0.1	0.1
5,0°	18.3	18.2	18.6	18.8	18.6	18.4	18.3	18.3	17.9	0.4	0.5
7,5°	37.8	40.9	44.2	49.4	53.8	57.8	61.2	63.5	64.6	1.6	2.1
10,0°	61.9	64.4	67.2	69.4	72.1	73.8	73.7	74.0	74.6	3.0	5.1
12,5°	82.6	81.1	83.7	89.0	92.7	97.0	98.3	99.8	100.6	5.3	10.4
15,0°	114.3	111.9	107.1	108.3	110.9	115.2	118.5	120.8	121.8	8.1	18.5
17,5°	116.3	116.4	118.8	121.8	125.7	129.7	133.0	135.7	137.3	10.1	28.7
20,0°	109.9	113.9	116.0	121.0	127.8	136.4	142.3	145.7	148.1	11.7	40.4
22,5°	113.2	116.5	120.0	122.3	128.0	135.4	144.2	147.8	149.8	13.7	54.0
25,0°	118.9	122.9	128.7	132.2	137.2	143.0	147.2	148.2	148.5	15.9	70.0
27,5°	131.0	133.2	140.0	143.1	146.0	147.2	147.4	145.7	145.4	18.5	88.4
30,0°	143.7	147.5	150.9	154.1	153.0	150.9	148.7	146.9	146.2	21.3	109.7
32,5°	154.1	157.8	160.8	163.8	160.8	154.2	152.1	150.1	149.4	23.6	133.3
35,0°	171.8	171.8	174.2	173.5	167.9	163.0	161.0	161.5	162.3	27.4	160.7
37,5°	184.6	184.6	186.0	186.6	185.6	176.6	172.8	172.0	173.2	31.3	192.0
40,0°	197.4	199.8	203.8	201.3	194.9	179.0	176.1	180.4	186.3	34.8	226.7
42,5°	213.7	211.3	208.9	207.7	196.5	182.0	182.5	184.3	184.7	39.1	265.8
45,0°	229.1	220.7	221.0	217.1	201.2	184.6	185.1	185.6	184.7	42.5	308.3
47,5°	234.1	230.4	230.2	223.4	200.6	189.0	192.8	191.3	190.6	45.7	354.0
50,0°	234.7	230.2	225.8	222.6	201.2	192.0	195.4	199.8	205.6	49.3	403.3
52,5°	234.3	228.2	216.1	213.1	198.0	194.8	197.3	196.9	196.2	52.9	456.2
55,0°	228.7	220.8	200.0	198.0	187.3	181.4	183.4	189.1	191.5	55.8	512.0
57,5°	216.1	203.0	183.5	176.7	166.3	159.7	167.0	176.7	179.9	57.9	569.9
60,0°	204.2	183.3	164.8	154.8	145.9	131.4	139.8	153.5	157.3	58.2	628.2
62,5°	195.7	169.5	147.4	126.4	118.1	104.5	109.5	116.5	122.8	56.9	685.0
65,0°	185.8	157.6	127.3	100.9	88.7	74.9	78.8	82.3	80.9	54.3	739.3
67,5°	174.7	142.9	107.9	80.6	64.2	47.6	49.5	50.7	50.0	50.5	789.8
70,0°	160.7	126.8	92.1	66.7	46.8	29.0	25.6	27.0	28.8	46.6	836.4
72,5°	127.7	101.2	78.5	53.7	31.1	19.0	15.4	14.7	15.3	40.8	877.2
75,0°	102.2	89.7	72.2	41.5	17.5	13.3	11.5	11.0	10.9	32.5	909.7
77,5°	75.3	68.7	59.1	25.8	12.6	10.8	9.7	9.1	9.0	21.5	931.2
80,0°	35.4	27.8	26.3	13.3	9.9	9.1	8.6	8.4	8.3	12.6	943.7
82,5°	18.8	14.5	11.2	9.4	8.5	8.0	7.8	7.7	7.6	7.4	951.2
85,0°	13.3	11.7	9.8	8.2	7.5	7.3	7.3	7.3	7.2	4.3	955.5
87,5°	10.5	10.7	8.9	7.6	7.2	7.1	7.0	6.9	6.9	3.1	958.6
90,0°	8.3	8.3	7.7	7.2	7.0	6.9	6.9	6.8	6.8	2.3	960.8
92,5°	7.7	7.4	7.2	7.1	7.0	6.9	6.8	6.7	6.8	2.1	963.0
95,0°	7.6	7.4	7.2	7.0	6.9	6.8	6.8	6.8	6.8	2.1	965.1
97,5°	7.6	7.4	7.2	7.0	6.9	6.8	6.7	6.7	6.7	2.1	967.2
100,0°	7.6	7.4	7.2	7.0	6.9	6.9	6.8	6.8	6.7	2.1	969.3
102,5°	7.6	7.4	7.2	7.1	6.9	6.9	6.8	6.8	6.8	2.1	971.3
105,0°	7.6	7.4	7.2	7.1	6.9	6.9	6.8	6.8	6.8	2.0	973.4
107,5°	7.6	7.4	7.2	7.1	6.9	6.9	6.8	6.8	6.8	2.0	975.4
110,0°	7.5	7.4	7.2	7.0	6.9	6.9	6.8	6.8	6.8	2.0	977.4

Photometric test report

Family DL 11 iQ	Order number: 5XA5565CF14H000022 EAN: 4058352955789	LP number 59430_76
Table of values for luminous intensities		Maximum luminous intensity



C- planes	0° 180°	5° 175° 185° 355°	10° 170° 190° 350°	15° 165° 195° 345°	20° 160° 200° 340°	25° 155° 205° 335°	30° 150° 210° 330°	35° 145° 215° 325°	40° 140° 220° 320°	45° 135° 225° 315°
γ	Luminous intensity in cd/klm									
112,5°	7.8	8.0	8.4	8.4	8.3	8.3	8.2	8.0	7.8	7.6
115,0°	7.7	8.0	8.3	8.3	8.3	8.2	8.1	7.9	7.8	7.6
117,5°	7.7	7.9	8.2	8.2	8.2	8.1	8.0	7.8	7.7	7.6
120,0°	7.6	7.8	8.0	8.1	8.1	8.0	7.9	7.8	7.6	7.5
122,5°	7.4	7.7	7.9	8.0	7.9	7.8	7.8	7.6	7.5	7.4
125,0°	7.3	7.5	7.7	7.8	7.7	7.7	7.6	7.5	7.3	7.2
127,5°	7.1	7.3	7.4	7.5	7.5	7.5	7.4	7.3	7.2	7.0
130,0°	6.8	7.0	7.1	7.2	7.2	7.1	7.1	7.0	6.9	6.8
132,5°	6.5	6.6	6.7	6.9	6.8	6.8	6.8	6.7	6.6	6.6
135,0°	6.1	6.3	6.4	6.4	6.4	6.5	6.4	6.4	6.3	6.2
137,5°	5.8	5.9	6.0	6.0	6.1	6.1	6.1	6.0	6.0	5.9
140,0°	5.5	5.6	5.6	5.7	5.7	5.8	5.8	5.7	5.7	5.6
142,5°	5.2	5.3	5.4	5.4	5.4	5.5	5.5	5.5	5.4	5.4
145,0°	5.0	5.0	5.0	5.1	5.1	5.1	5.1	5.1	5.1	5.1
147,5°	4.6	4.7	4.7	4.7	4.7	4.8	4.8	4.8	4.8	4.8
150,0°	4.1	4.2	4.1	4.2	4.2	4.3	4.3	4.3	4.3	4.2
152,5°	3.5	3.6	3.6	3.6	3.6	3.7	3.7	3.6	3.6	3.6
155,0°	2.8	2.8	2.8	2.8	2.8	2.9	2.9	2.9	2.8	2.8
157,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
160,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7
162,5°	1.5	1.5	1.5	1.4	1.4	1.5	1.5	1.5	1.4	1.5
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167,5°	1.2	1.2	1.3	1.4	1.4	1.4	1.4	1.4	1.3	1.3
170,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565CF14H000022 EAN: 4058352955789	LP number 59430_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	50° 130° 230° 310°	55° 125° 235° 305°	60° 120° 240° 300°	65° 115° 245° 295°	70° 110° 250° 290°	75° 105° 255° 285°	80° 100° 260° 280°	85° 95° 265° 275°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm									Luminous flux in lm/klm	
112,5°	7.5	7.3	7.2	7.0	6.9	6.8	6.8	6.8	6.8	1.9	979.3
115,0°	7.5	7.3	7.2	7.0	6.9	6.9	6.8	6.8	6.8	1.9	981.2
117,5°	7.4	7.3	7.1	7.0	6.9	6.8	6.8	6.8	6.8	1.8	983.0
120,0°	7.3	7.2	7.1	6.9	6.9	6.8	6.8	6.8	6.8	1.8	984.8
122,5°	7.2	7.1	6.9	6.9	6.8	6.7	6.7	6.6	6.6	1.7	986.4
125,0°	7.1	7.0	6.8	6.7	6.7	6.6	6.6	6.6	6.6	1.6	988.1
127,5°	6.9	6.8	6.7	6.6	6.5	6.6	6.4	6.4	6.4	1.5	989.6
130,0°	6.7	6.6	6.5	6.4	6.4	6.4	6.4	6.3	6.3	1.4	991.0
132,5°	6.4	6.4	6.3	6.2	6.1	6.1	6.1	6.1	6.1	1.3	992.3
135,0°	6.2	6.0	6.0	5.9	5.9	5.9	5.9	5.8	5.8	1.2	993.5
137,5°	5.9	5.8	5.7	5.7	5.7	5.7	5.6	5.6	5.6	1.1	994.6
140,0°	5.5	5.5	5.5	5.4	5.4	5.4	5.4	5.4	5.4	1.0	995.6
142,5°	5.3	5.3	5.2	5.2	5.2	5.2	5.2	5.2	5.1	0.9	996.4
145,0°	5.1	5.0	5.0	5.0	4.9	4.9	5.0	5.0	5.0	0.8	997.2
147,5°	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.6	4.6	0.7	997.9
150,0°	4.2	4.2	4.2	4.1	4.1	4.1	4.1	4.0	4.1	0.6	998.5
152,5°	3.6	3.5	3.5	3.5	3.4	3.4	3.4	3.4	3.4	0.4	999.0
155,0°	2.8	2.8	2.8	2.8	2.8	2.7	2.7	2.7	2.7	0.3	999.3
157,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	0.2	999.5
160,0°	1.7	1.7	1.6	1.7	1.6	1.6	1.6	1.6	1.5	0.2	999.6
162,5°	1.5	1.5	1.4	1.5	1.5	1.5	1.4	1.4	1.4	0.1	999.8
165,0°	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.3	1.3	0.1	999.9
167,5°	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.3	0.1	999.9
170,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565CF14H000022 EAN: 4058352955789	LP number 59430_76
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	3000	23.9	25.5	24.7
95	241	252	2846	22.5	24.0	23.2
90	229	250	2705	21.2	22.6	21.9
85	216	248	2551	19.9	21.2	20.5
80	203	246	2398	18.6	19.8	19.2
75	190	243	2244	17.4	18.5	18.0
70	178	241	2102	16.2	17.2	16.7
65	165	238	1949	14.9	15.9	15.4
60	152	235	1795	13.8	14.6	14.2
55	140	232	1654	12.7	13.4	13.0
50	127	229	1500	11.5	12.2	11.8
45	114	225	1346	10.3	11.0	10.6
40	102	221	1205	9.4	9.9	9.6
35	89	216	1051	8.2	8.7	8.4
30	76	210	898	7.2	7.6	7.4
25	63	203	744	6.2	6.5	6.4
20	51	195	602	5.3	5.5	5.4
15	38	184	449	4.2	4.4	4.3
15	37	183	437	4.1	4.3	4.2