

Photometric test report

Family
DL 11 iQ

Order number: 5XA5575BF108000022
EAN: 4058352956472

LP number
59373_91

serial
documentation
01.02.2024



Version luminaire insert LED, Siteco® metallic grey (DB 702S), post-top- or mounting to wall arm
Optic asymmetric, extremely wide distribution (P1.0a)
Cover cover transparent, PMMA
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 1460 lm
 Power consumption = 12.9 W
 Luminous efficacy = 113.2 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C190-10

C195-15

C270-90

Imax: 847 cd/klm

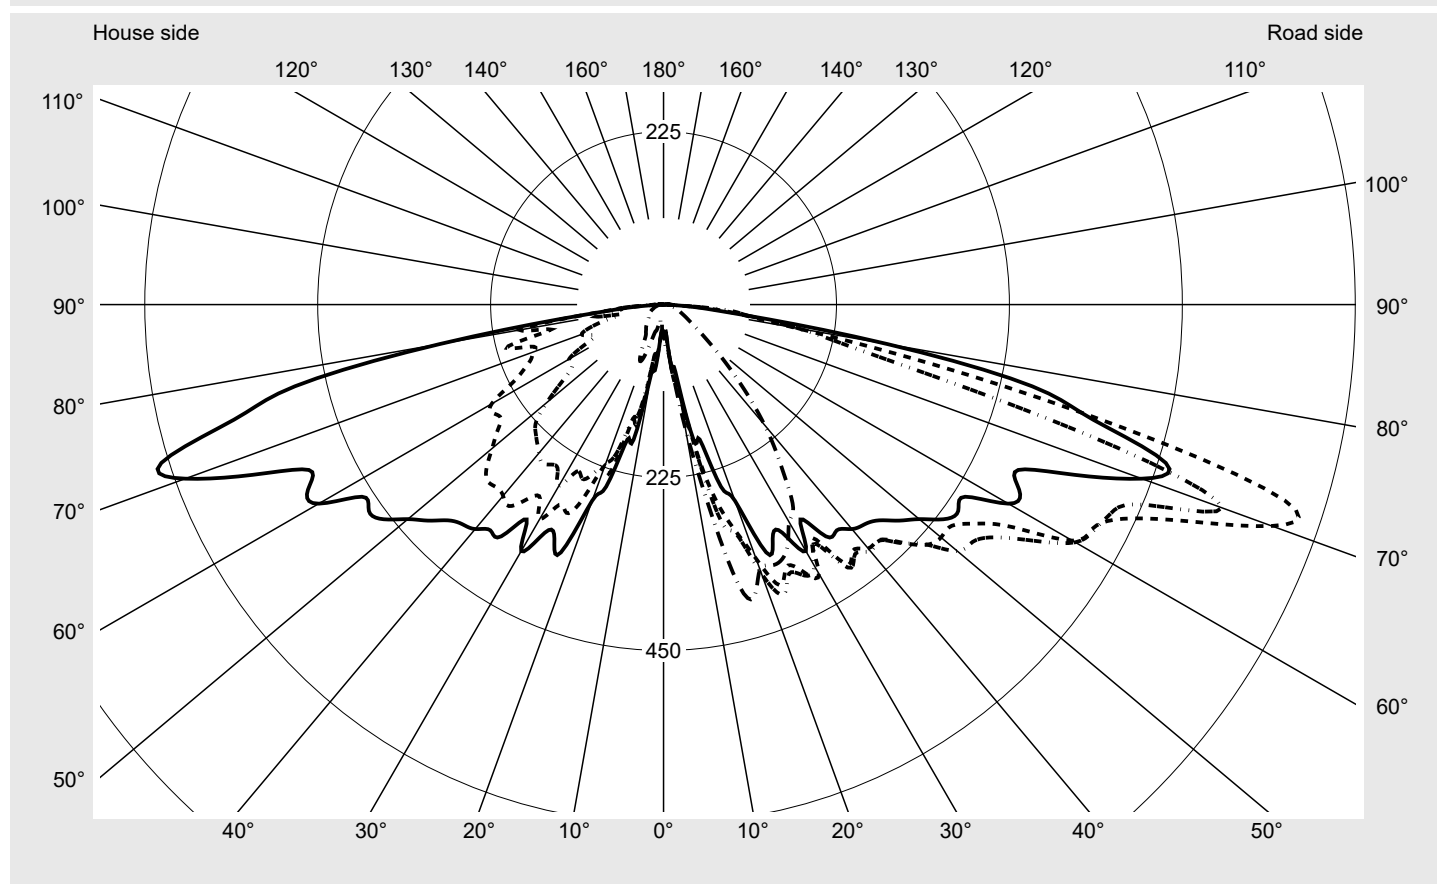

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	98.6%
Eta 90° - 180°	1.4%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	842.2
Imax 80°	295.6
Imax 90°	20.0
Imax >90°	6.8
Imax >95°	4.5

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL 11 iQ	Order number: 5XA5575BF108000022 EAN: 4058352956472	LP number 59373_91
---------------------------	--	------------------------------

Envelope curve in cd/klm

KMK 72.5°


KMK 70°

KMK 67.5°

KMK 65°

sit

eco

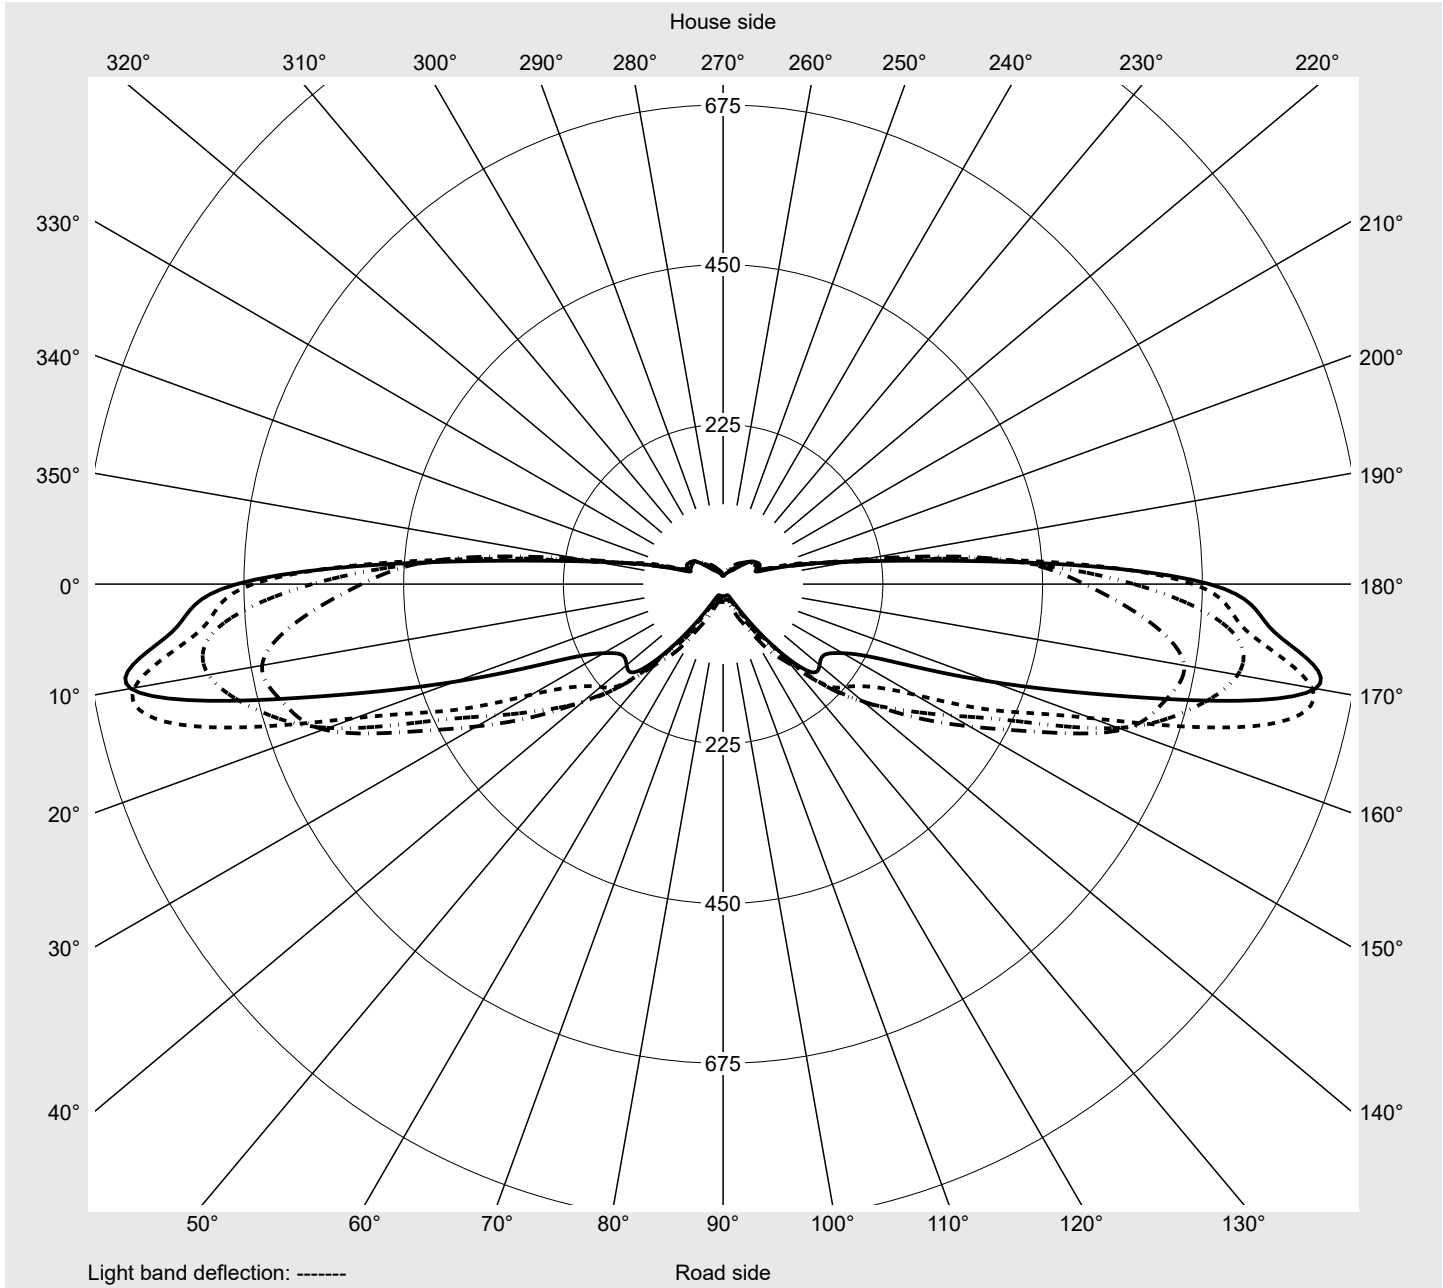

Photometric test report

Family DL 11 iQ	Order number: 5XA5575BF108000022 EAN: 4058352956472	LP number 59373_91
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6
2,5°	42.6	43.1	43.8	44.1	44.0	43.9	43.9	44.1	44.3	44.9	45.6	46.5	47.6
5,0°	38.9	38.6	39.1	40.0	41.6	44.2	51.2	54.2	55.3	56.4	58.5	59.1	57.0
7,5°	86.4	91.7	92.2	94.4	92.0	94.6	98.7	99.7	102.3	103.2	105.8	108.5	106.7
10,0°	88.7	99.8	110.4	122.2	128.7	133.5	141.2	148.9	154.0	162.0	166.0	167.4	173.2
12,5°	179.9	188.6	191.2	196.0	207.0	211.1	227.5	233.6	245.0	257.7	268.4	275.1	278.0
15,0°	181.6	215.8	263.8	294.2	313.7	313.7	317.5	316.5	312.0	331.9	349.7	373.7	369.5
17,5°	248.4	273.0	307.1	311.5	316.9	339.5	367.4	361.9	391.4	404.9	403.3	412.8	410.5
20,0°	271.5	327.7	351.6	372.3	391.6	411.4	418.6	417.9	425.1	430.7	427.2	428.9	423.1
22,5°	349.0	388.3	395.2	408.2	414.3	425.6	423.4	412.5	401.3	404.1	406.1	400.8	387.9
25,0°	336.0	361.6	377.4	386.4	390.4	388.2	395.0	398.6	394.3	390.6	391.2	393.2	380.8
27,5°	334.6	364.6	390.9	397.5	412.5	409.2	411.3	412.4	407.7	400.4	392.8	397.8	376.5
30,0°	370.4	388.0	404.3	392.0	406.3	400.8	394.5	388.7	378.3	376.8	369.5	366.8	354.5
32,5°	331.5	344.7	359.8	368.9	377.5	384.7	395.7	395.9	382.2	380.3	368.2	345.8	326.4
35,0°	368.1	399.3	411.5	417.7	415.4	420.4	404.8	394.2	369.8	356.0	338.3	316.9	294.0
37,5°	370.2	388.4	404.0	409.2	407.0	393.3	392.9	374.6	356.0	335.9	313.0	289.0	265.5
40,0°	381.3	404.0	414.1	418.7	410.9	399.0	386.4	368.2	345.5	317.9	289.4	259.4	236.1
42,5°	387.6	405.4	415.3	416.3	407.5	392.4	382.0	359.8	325.3	296.2	264.3	230.6	213.6
45,0°	397.0	410.1	437.7	439.3	419.7	393.9	381.1	346.6	303.6	270.8	239.5	207.2	195.1
47,5°	416.0	427.3	462.7	461.4	444.9	396.4	368.8	324.5	284.2	249.3	216.7	192.7	178.1
50,0°	434.3	447.9	471.3	498.9	491.0	416.6	364.3	309.9	263.4	228.5	187.7	172.6	162.6
52,5°	458.8	472.4	472.7	507.1	489.2	445.5	378.3	307.0	254.0	209.1	170.2	161.0	149.2
55,0°	468.1	491.5	496.9	528.0	493.5	467.9	392.9	312.8	250.3	197.7	162.6	156.2	129.6
57,5°	465.3	519.5	539.2	572.0	542.9	481.9	389.3	311.7	248.6	198.8	164.9	156.3	115.6
60,0°	518.0	567.0	614.2	618.6	594.1	507.7	390.1	323.2	264.7	207.2	167.6	143.9	116.2
62,5°	521.6	585.3	630.1	632.8	626.9	513.4	403.9	327.0	261.9	207.7	165.3	131.7	98.8
65,0°	509.1	601.9	659.4	642.4	598.9	492.8	400.9	325.8	256.8	201.7	147.9	116.1	76.5
67,5°	578.9	715.1	736.1	681.4	592.3	456.7	370.3	309.6	258.7	200.7	134.8	91.6	52.7
70,0°	662.3	738.6	842.2	773.2	552.1	420.1	311.4	251.9	225.3	198.5	130.2	77.3	40.5
72,5°	685.2	779.9	847.4	619.2	401.9	253.5	194.7	174.0	177.4	175.1	124.8	65.6	30.4
75,0°	578.7	675.4	617.6	375.6	221.4	160.9	136.3	116.8	109.7	114.6	76.3	43.7	19.4
77,5°	491.4	466.2	359.0	243.8	173.6	127.7	108.7	98.8	77.8	56.1	35.0	21.1	12.4
80,0°	295.6	240.9	173.7	178.1	139.5	88.3	76.0	77.6	43.3	29.8	22.8	15.7	10.4
82,5°	111.0	94.6	105.8	111.6	95.8	63.2	65.0	53.5	20.3	12.9	9.9	9.9	9.0
85,0°	47.4	49.6	59.4	81.9	74.6	48.8	44.2	32.4	14.3	9.9	9.2	8.6	8.1
87,5°	9.3	9.2	9.1	8.9	8.5	8.4	8.1	8.3	8.3	8.0	8.0	7.5	7.2
90,0°	7.4	7.5	7.6	7.6	7.5	7.2	7.2	7.4	7.5	7.5	7.4	7.2	6.7
92,5°	5.4	5.7	5.8	5.8	5.8	6.0	6.0	6.3	6.7	6.8	6.5	6.1	5.8
95,0°	4.9	4.9	4.9	4.9	5.1	4.9	5.1	5.1	4.8	4.7	4.5	4.0	4.0
97,5°	4.2	4.4	4.5	4.5	4.5	4.5	4.3	4.2	4.0	4.0	3.7	3.6	3.6
100,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	3.9	3.6	3.6	3.4	3.4	3.1
102,5°	3.6	3.6	3.8	3.9	3.8	3.8	3.6	3.6	3.3	3.1	3.1	3.1	3.1
105,0°	3.4	3.5	3.6	3.6	3.6	3.6	3.3	3.1	3.1	3.1	2.8	2.8	2.7
107,5°	3.1	3.1	3.3	3.4	3.1	3.1	3.1	3.1	2.8	2.7	2.7	2.7	2.7
110,0°	3.1	3.1	3.1	3.1	3.1	3.1	3.0	2.8	2.7	2.7	2.7	2.7	2.7
112,5°	2.9	3.0	3.1	3.1	3.0	3.0	2.7	2.7	2.7	2.7	2.4	2.3	2.2

Photometric test report

Family DL 11 iQ	Order number: 5XA5575BF108000022 EAN: 4058352956472	LP number 59373_91
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6
2,5°	49.7	49.8	51.2	52.4	53.3	53.6	41.9	40.7	39.6	38.1	36.7	35.7	34.9
5,0°	57.1	58.1	59.4	59.5	60.4	60.2	40.1	41.5	44.5	48.4	50.7	50.8	49.9
7,5°	104.4	99.3	95.2	90.9	87.4	86.1	81.2	72.5	66.5	61.1	54.3	47.9	41.2
10,0°	180.3	182.4	180.8	173.0	166.9	164.1	77.5	71.3	65.5	62.1	61.7	66.7	65.4
12,5°	278.5	287.0	280.2	273.1	267.4	262.0	169.5	156.0	140.7	126.8	119.3	98.0	79.2
15,0°	374.6	375.7	378.1	375.8	375.6	377.8	163.9	156.9	153.5	151.6	135.9	120.9	112.5
17,5°	419.8	422.6	411.6	401.8	397.3	395.8	241.4	227.3	202.2	192.7	179.5	154.4	137.1
20,0°	423.5	411.1	387.9	371.8	371.6	366.8	241.4	222.8	219.4	194.5	181.8	152.5	126.0
22,5°	388.8	381.2	367.6	358.5	363.6	367.2	305.0	272.8	237.3	209.5	174.3	140.0	120.8
25,0°	380.0	375.0	364.3	359.0	362.5	365.3	317.3	298.9	250.1	221.8	178.7	133.1	107.0
27,5°	366.5	353.9	345.5	345.2	348.9	350.5	299.0	293.7	244.8	204.4	171.6	140.3	106.7
30,0°	341.8	329.3	325.2	324.3	325.9	326.9	341.6	322.3	272.6	211.1	173.2	132.9	89.0
32,5°	307.6	299.0	302.0	307.2	312.4	313.9	320.3	299.1	256.1	205.5	173.6	119.0	78.7
35,0°	278.5	276.9	278.5	277.4	276.1	276.5	346.6	308.9	254.1	196.9	156.5	100.1	79.0
37,5°	249.4	248.0	246.2	242.7	239.7	240.0	360.1	330.4	259.7	221.2	154.5	101.8	76.3
40,0°	224.2	222.7	216.7	211.1	204.8	204.4	360.2	324.8	251.9	202.2	136.4	95.8	58.7
42,5°	200.1	195.8	187.2	178.1	169.9	167.5	366.9	322.3	243.5	183.5	121.9	78.1	56.0
45,0°	179.5	168.1	156.8	144.9	136.5	132.7	376.7	324.2	235.4	148.5	103.7	64.5	56.8
47,5°	159.3	146.0	132.3	116.6	107.4	104.1	391.9	311.8	224.6	128.1	81.7	60.9	58.0
50,0°	142.0	125.3	108.2	93.3	84.4	79.6	383.4	291.1	198.5	111.2	66.3	59.1	56.0
52,5°	125.1	102.3	89.4	74.0	65.6	62.4	378.2	273.4	169.2	94.1	59.6	55.0	53.4
55,0°	107.1	85.1	74.0	56.5	50.6	49.7	376.8	258.3	146.9	80.5	57.6	51.4	50.0
57,5°	92.9	74.7	60.1	43.7	41.0	40.5	383.4	262.9	142.4	75.7	55.6	48.3	48.0
60,0°	90.3	57.7	44.6	35.3	34.3	34.4	397.3	258.3	141.9	75.5	51.9	47.6	48.0
62,5°	79.7	47.2	33.4	29.9	29.5	29.3	392.4	222.9	120.6	71.6	50.0	49.2	49.2
65,0°	54.9	35.5	27.0	25.5	25.4	25.3	396.6	200.9	98.6	62.2	51.1	51.4	51.1
67,5°	36.5	26.4	23.0	22.3	22.5	22.6	382.1	186.7	104.1	59.9	51.6	53.1	51.1
70,0°	27.0	21.4	19.6	19.4	19.6	19.9	393.6	179.9	113.3	61.4	55.6	58.1	54.4
72,5°	18.6	16.7	16.7	16.9	17.0	17.0	368.8	182.0	101.3	52.2	55.3	57.4	54.6
75,0°	14.3	14.3	14.5	14.4	14.3	14.1	412.1	209.2	76.1	49.7	54.8	61.7	56.5
77,5°	12.1	12.2	12.0	11.4	10.9	10.3	333.8	150.1	58.6	51.0	60.9	61.7	56.6
80,0°	10.2	10.1	9.7	9.1	8.6	8.5	234.9	190.2	89.5	52.9	61.8	60.3	59.8
82,5°	8.9	8.5	7.8	7.3	7.2	7.2	187.4	108.5	59.4	51.3	59.9	60.5	52.2
85,0°	7.2	6.8	6.4	5.9	5.8	5.8	65.2	51.8	58.7	46.6	52.5	48.9	41.5
87,5°	6.0	5.3	4.9	4.8	4.7	4.7	10.5	15.4	25.3	34.8	35.4	27.7	17.2
90,0°	6.0	5.1	4.6	4.5	4.2	4.0	9.0	12.5	17.4	20.0	17.2	13.1	8.6
92,5°	5.5	4.7	4.2	3.9	3.9	3.8	5.4	5.4	5.0	4.9	4.7	4.6	4.2
95,0°	3.9	3.6	3.6	3.6	3.6	3.6	4.5	4.5	4.5	4.4	4.0	4.0	3.7
97,5°	3.6	3.4	3.3	3.1	3.1	3.1	4.0	4.0	4.0	4.0	3.7	3.6	3.4
100,0°	3.1	3.1	3.1	3.1	3.1	3.1	4.0	3.8	3.6	3.6	3.6	3.4	3.1
102,5°	3.0	3.1	2.8	2.8	2.7	2.7	3.6	3.6	3.6	3.2	3.1	3.1	3.0
105,0°	2.7	2.7	2.7	2.7	2.7	2.7	3.4	3.2	3.1	3.1	3.1	3.1	2.9
107,5°	2.7	2.7	2.7	2.7	2.5	2.7	3.1	3.1	3.1	3.1	3.0	2.7	2.7
110,0°	2.5	2.5	2.3	2.4	2.2	2.2	3.0	3.0	2.9	2.7	2.7	2.7	2.7
112,5°	2.4	2.2	2.2	2.2	2.2	2.2	3.0	2.9	2.8	2.7	2.7	2.7	2.7

Photometric test report

Family DL 11 iQ				Order number: 5XA5575BF108000022 EAN: 4058352956472								LP number 59373_91		
Table of values for luminous intensities												Maximum luminous intensity		siteco
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone	
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm		
0,0°	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	36.6	0.1	0.1	
2,5°	34.6	34.6	35.0	36.1	37.8	39.0	39.7	40.7	39.0	37.2	36.6	0.5	0.6	
5,0°	47.9	44.6	39.0	33.7	30.4	27.9	26.2	24.4	23.5	22.9	22.6	1.1	1.6	
7,5°	39.7	40.5	39.2	36.3	33.1	29.5	26.9	24.3	22.5	21.7	21.7	2.5	4.2	
10,0°	60.8	57.3	50.0	37.9	28.7	24.8	23.3	22.4	22.3	22.6	22.6	4.8	8.9	
12,5°	66.7	59.9	53.4	49.0	42.2	36.1	30.3	27.7	25.4	22.7	21.0	9.5	18.5	
15,0°	99.9	89.6	78.5	61.5	46.1	40.0	35.9	35.0	36.6	36.0	34.4	15.0	33.4	
17,5°	119.7	120.9	110.4	97.9	75.4	61.1	50.9	45.0	41.7	40.2	39.4	20.4	53.8	
20,0°	106.6	94.7	87.2	81.7	71.3	67.3	67.9	58.6	60.8	68.5	68.1	24.4	78.3	
22,5°	107.2	91.4	79.9	73.8	74.2	75.1	77.1	64.8	61.3	77.5	79.6	27.8	106.1	
25,0°	86.4	66.9	61.6	62.0	65.7	69.7	71.7	64.0	54.4	67.4	69.6	29.7	135.8	
27,5°	77.6	59.4	55.2	56.0	57.8	60.5	60.7	54.1	42.4	54.1	55.4	32.0	167.8	
30,0°	68.7	57.6	52.6	51.7	52.3	53.3	52.5	48.2	38.1	45.6	46.1	33.8	201.6	
32,5°	67.3	54.2	51.4	51.1	51.0	50.8	48.3	45.6	36.5	41.7	42.7	34.4	236.1	
35,0°	59.5	49.5	48.6	48.9	49.7	48.4	46.6	43.7	33.8	38.5	39.6	36.5	272.6	
37,5°	55.1	52.7	49.7	47.1	46.3	45.7	44.1	41.5	32.5	35.5	37.4	37.2	309.8	
40,0°	52.4	51.4	51.4	50.8	46.9	43.7	40.7	37.6	30.8	32.4	34.2	37.7	347.4	
42,5°	53.0	51.5	50.6	48.0	45.8	43.9	40.5	35.7	28.7	28.8	30.9	37.7	385.1	
45,0°	53.0	52.3	50.5	47.5	44.7	41.0	37.2	34.1	28.1	27.3	29.1	37.9	423.0	
47,5°	54.7	53.0	51.2	48.5	44.0	39.7	35.4	32.0	25.7	24.9	26.9	38.3	461.3	
50,0°	53.9	53.6	53.1	49.8	45.3	40.4	34.6	30.6	25.3	23.7	25.5	38.7	499.9	
52,5°	52.9	52.2	51.8	49.7	45.2	39.6	34.0	29.9	26.1	24.0	25.9	39.0	539.0	
55,0°	50.5	51.0	50.5	47.2	42.9	37.5	32.9	28.7	25.8	23.6	25.0	39.7	578.7	
57,5°	48.2	48.5	48.5	45.3	40.5	35.2	30.2	26.2	23.5	21.5	22.8	41.3	620.0	
60,0°	47.1	46.2	45.9	42.3	37.0	32.0	27.4	23.8	21.0	19.0	20.6	44.1	664.1	
62,5°	46.8	44.5	42.8	38.8	34.0	29.1	25.2	21.8	19.1	17.2	18.6	44.8	708.9	
65,0°	48.3	43.3	38.9	34.7	30.4	26.5	22.7	20.0	17.5	15.6	17.1	44.4	753.2	
67,5°	48.5	41.3	35.9	30.8	27.0	23.6	20.6	18.0	15.9	14.3	15.1	45.7	798.9	
70,0°	50.3	39.4	32.8	27.4	24.0	21.3	18.8	16.7	14.7	13.1	13.6	46.7	845.6	
72,5°	49.1	38.6	30.1	24.4	21.6	19.2	17.1	15.3	13.4	11.8	12.4	41.7	887.3	
75,0°	48.0	38.3	27.6	22.1	19.4	17.2	15.0	13.5	11.9	10.2	10.8	32.9	920.2	
77,5°	50.5	39.1	25.5	19.8	17.1	15.2	13.4	12.1	10.5	9.0	9.2	24.7	944.9	
80,0°	52.1	40.2	23.1	17.6	15.4	13.4	12.1	10.9	9.3	8.0	8.1	18.0	962.9	
82,5°	45.8	30.7	18.6	15.2	13.6	12.2	11.0	9.7	8.1	7.1	7.2	11.8	974.7	
85,0°	26.2	17.3	14.7	12.4	11.4	10.3	9.2	8.2	7.1	6.0	6.3	7.7	982.4	
87,5°	8.3	7.5	5.8	4.8	4.4	3.9	3.9	3.8	3.8	3.5	3.7	2.7	985.1	
90,0°	6.7	6.7	5.1	3.9	3.6	3.4	3.0	2.9	2.7	2.6	2.4	2.0	987.1	
92,5°	4.0	3.8	3.5	3.3	2.9	2.8	2.5	2.6	2.4	2.2	2.2	1.3	988.3	
95,0°	3.6	3.4	3.1	2.9	2.8	2.5	2.5	2.2	2.2	2.1	1.8	1.1	989.4	
97,5°	3.3	3.1	2.9	2.7	2.5	2.4	2.2	2.2	2.2	1.8	1.8	0.9	990.3	
100,0°	3.1	2.9	2.7	2.5	2.4	2.1	2.0	1.9	1.8	1.8	1.8	0.9	991.2	
102,5°	2.8	2.7	2.5	2.2	2.2	2.1	1.8	1.8	1.8	1.8	1.8	0.8	992.0	
105,0°	2.7	2.5	2.4	2.2	2.1	1.8	1.8	1.8	1.8	1.6	1.3	0.7	992.7	
107,5°	2.7	2.4	2.2	2.2	1.9	1.8	1.8	1.6	1.5	1.4	1.3	0.7	993.4	
110,0°	2.5	2.2	2.2	2.0	1.8	1.8	1.6	1.6	1.3	1.3	1.3	0.6	994.1	
112,5°	2.4	2.2	2.1	1.8	1.8	1.8	1.6	1.5	1.3	1.3	1.3	0.6	994.7	

Photometric test report

Family DL 11 iQ	Order number: 5XA5575BF108000022 EAN: 4058352956472	LP number 59373_91
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	2.8	2.9	3.0	2.9	2.8	2.8	2.7	2.7	2.5	2.5	2.2	2.2	2.2
117,5°	2.7	2.7	2.8	2.8	2.7	2.7	2.7	2.7	2.4	2.2	2.2	2.2	2.2
120,0°	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.4	2.2	2.2	2.2	2.2	2.2
122,5°	2.7	2.7	2.7	2.7	2.7	2.5	2.4	2.2	2.2	2.2	2.2	2.2	2.2
125,0°	2.7	2.7	2.7	2.7	2.5	2.4	2.2	2.2	2.2	2.2	2.2	2.1	1.9
127,5°	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.1	1.8	1.8	1.8	1.8
130,0°	2.2	2.2	2.2	2.2	2.2	2.0	2.1	1.8	1.8	1.8	1.8	1.8	1.8
132,5°	2.2	1.8	2.1	1.9	1.8	1.8	1.8	1.8	1.8	1.8	1.7	1.8	1.5
135,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.7	1.8	1.8	1.3
137,5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.7	1.6	1.5	1.3
140,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.7	1.6	1.3	1.4	1.5	1.3	1.3
142,5°	1.3	1.3	1.7	1.3	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3
145,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
147,5°	1.0	1.0	1.0	1.0	1.1	0.9	1.0	0.9	1.1	1.1	1.0	1.0	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575BF108000022 EAN: 4058352956472	LP number 59373_91
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	2.2	2.2	2.2	2.2	2.2	2.2	3.0	2.8	2.7	2.7	2.7	2.7	2.5
117,5°	2.2	2.2	2.2	2.2	2.2	2.2	2.7	2.7	2.7	2.7	2.7	2.7	2.4
120,0°	2.2	2.2	2.2	2.2	2.2	2.2	2.7	2.7	2.7	2.7	2.7	2.7	2.5
122,5°	2.2	2.2	2.1	2.1	2.2	2.2	2.7	2.7	2.7	2.7	2.7	2.7	2.2
125,0°	1.9	2.0	2.0	1.9	2.0	2.0	2.7	2.7	2.7	2.5	2.5	2.4	2.2
127,5°	1.8	1.8	1.8	1.8	1.8	1.8	2.2	2.2	2.2	2.2	2.2	2.2	2.2
130,0°	1.8	1.8	1.8	1.8	1.8	1.8	2.2	2.2	2.2	2.2	2.2	2.2	2.2
132,5°	1.6	1.6	1.6	1.5	1.6	1.8	2.1	2.1	2.0	2.0	1.8	1.9	1.8
135,0°	1.6	1.4	1.4	1.5	1.6	1.6	1.8	1.8	1.9	1.8	1.8	1.8	1.8
137,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.8	1.8	1.8	1.8
140,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.7	1.7	1.7	1.6	1.7	1.6	1.6
142,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.3	1.3
145,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
147,5°	0.9	0.9	0.9	0.9	0.9	1.1	0.9	1.1	1.0	1.0	1.0	1.1	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575BF108000022 EAN: 4058352956472	LP number 59373_91
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	2.4	2.2	2.2	1.9	1.8	1.8	1.6	1.6	1.3	1.3	1.3	0.6	995.3
117,5°	2.2	2.2	2.1	1.8	1.8	1.8	1.6	1.6	1.3	1.3	1.3	0.6	995.8
120,0°	2.2	2.2	2.1	1.8	1.8	1.8	1.6	1.4	1.3	1.3	1.3	0.5	996.4
122,5°	2.2	2.1	2.0	1.8	1.8	1.8	1.5	1.3	1.3	1.3	1.3	0.5	996.9
125,0°	2.2	2.1	1.9	1.8	1.8	1.8	1.5	1.3	1.3	1.3	1.3	0.5	997.4
127,5°	2.2	2.0	1.8	1.8	1.8	1.8	1.3	1.3	1.3	1.3	1.3	0.4	997.8
130,0°	2.1	1.8	1.8	1.8	1.8	1.7	1.3	1.3	1.3	1.3	1.3	0.4	998.2
132,5°	1.8	1.8	1.8	1.8	1.8	1.7	1.3	1.3	1.3	1.3	1.3	0.4	998.5
135,0°	1.8	1.8	1.8	1.8	1.8	1.5	1.3	1.3	1.3	1.3	1.3	0.3	998.9
137,5°	1.8	1.7	1.6	1.4	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.3	999.1
140,0°	1.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.3	999.4
142,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.6
145,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	0.2	999.8
147,5°	1.1	1.1	1.2	1.1	1.2	1.2	1.1	1.3	0.9	1.3	1.2	0.2	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575BF108000022 EAN: 4058352956472	LP number 59373_91
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	1460	12.9	13.3	13.1
95	241	252	1385	12.2	12.6	12.4
90	229	250	1316	11.5	11.9	11.7
85	216	248	1242	10.7	11.1	10.9
80	203	246	1167	10.1	10.5	10.3
75	190	243	1092	9.4	9.8	9.6
70	178	241	1023	8.9	9.1	9.0
65	165	238	948	8.2	8.4	8.3
60	152	235	874	7.6	7.8	7.7
55	140	232	805	7.0	7.2	7.1
50	127	229	730	6.4	6.6	6.5
45	114	225	655	5.8	6.0	5.9
40	102	221	586	5.3	5.4	5.4
35	89	216	512	4.8	4.9	4.8
30	76	210	437	4.3	4.3	4.3
25	63	203	362	3.7	3.8	3.8
24	60	201	345	3.5	3.7	3.6