

Photometric test report

Family

Licross® 21 Opal

Order number: 52TE1DCN4CXM

EAN: 4058352056714

LP number

59520_106

Version

Lamps

Controlgear

Rated values

cover, opal, direct-/ indirect distribution, diffuse

LED 4000 K | CRI ≥ 80

ECG-Multilumen CLOi

Net luminous flux = 12300 lm

Power consumption = 68.4 W


Luminous efficacy = 179.8 lm/W

serial

documentation

29.01.2024

siteco

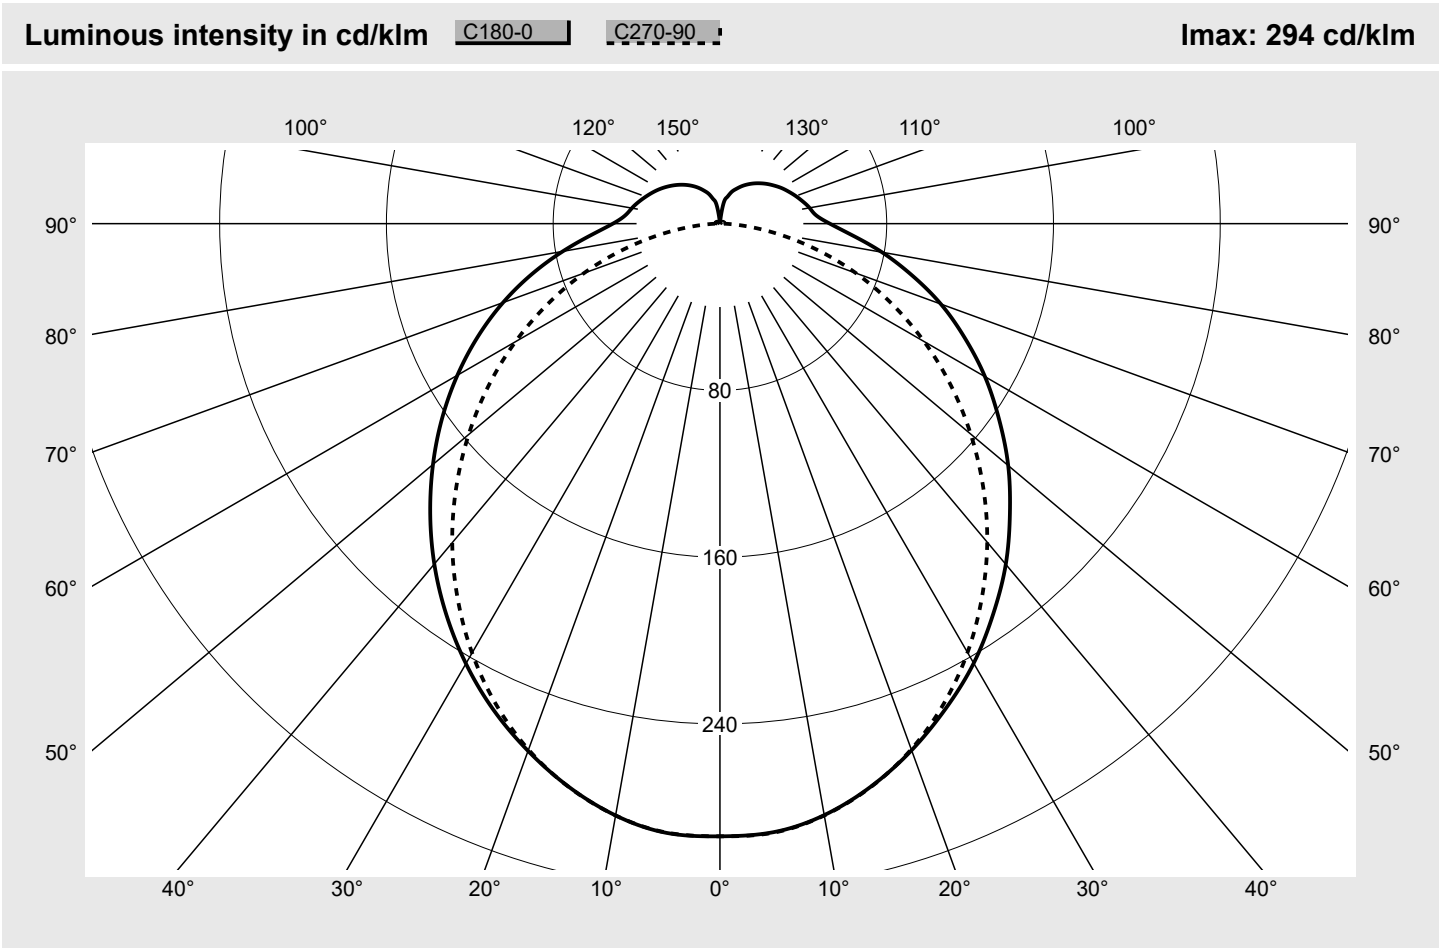

Classifications		Luminaire light output ratios	
DIN 5040	B 3 1	η_{LB}	100.0%
CIE	N1=44 N2=73 N3=91	ϕ_u	87.4%
	N4=87 N5=100	ϕ_o	12.6%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN4CXM EAN: 4058352056714	LP number 59520_106
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN4CXM EAN: 4058352056714	LP number 59520_106
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN4CXM EAN: 4058352056714	LP number 59520_106
----------------------------	--	------------------------

UGR-Table		Standard room									siteco
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions											
x	y	View crosswise (C0)					View endwise (C90)				
2H	2H	22.5	24.0	23.0	24.5	25.0	22.1	23.7	22.6	24.1	24.6
	3H	24.4	25.8	24.9	26.3	26.8	23.7	25.1	24.2	25.6	26.1
	4H	25.2	26.5	25.7	27.0	27.6	24.2	25.5	24.7	26.0	26.6
	6H	26.0	27.2	26.5	27.7	28.3	24.6	25.8	25.1	26.3	26.9
	8H	26.4	27.5	26.9	28.1	28.7	24.7	25.9	25.3	26.4	27.0
	12H	26.7	27.7	27.3	28.3	29.0	24.7	25.8	25.3	26.4	27.0
4H	2H	23.2	24.5	23.7	25.0	25.5	22.8	24.1	23.4	24.7	25.2
	3H	25.2	26.3	25.8	26.9	27.5	24.5	25.6	25.1	26.2	26.8
	4H	26.2	27.2	26.8	27.8	28.5	25.2	26.2	25.8	26.8	27.5
	6H	27.2	28.0	27.8	28.6	29.3	25.7	26.6	26.3	27.2	27.9
	8H	27.6	28.4	28.3	29.1	29.8	25.9	26.7	26.5	27.3	28.0
	12H	28.0	28.7	28.7	29.4	30.1	26.0	26.7	26.6	27.3	28.0
8H	4H	26.5	27.4	27.1	28.0	28.6	25.6	26.4	26.2	27.1	27.8
	6H	27.7	28.4	28.3	29.0	29.7	26.3	27.0	27.0	27.6	28.4
	8H	28.3	28.9	28.9	29.5	30.3	26.6	27.2	27.2	27.8	28.6
	12H	28.8	29.3	29.5	30.0	30.8	26.7	27.2	27.4	27.9	28.7
12H	4H	26.5	27.3	27.1	27.9	28.6	25.7	26.4	26.3	27.0	27.8
	6H	27.7	28.3	28.4	29.0	29.7	26.4	27.0	27.1	27.7	28.4
	8H	28.4	28.9	29.0	29.6	30.3	26.7	27.3	27.4	27.9	28.7

Luminance table		Max. for $\gamma \geq 65^\circ$				Photometric dimensions in mm:		L = 1500 B = 76		H(C0) = 25 H(C90) = 25		H(C180) = 25 H(C270) = 25	
C-planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m²												
45°	22587.1	22561.3	23406.4	26801.1	23500.8	22580.4	22568.5	22551.7	23427.4	26849.7	23511.3	22609.1	
50°	21767.4	21688.4	22341.2	25843.4	22374.9	21628.0	21669.7	21638.0	22330.0	25896.7	22408.6	21678.3	
55°	20915.4	20840.6	21231.7	24845.8	21243.8	20700.9	20822.1	20743.9	21207.4	24890.4	21304.5	20808.3	
60°	20181.8	20001.7	20115.0	23722.5	20088.3	19792.9	19992.5	19850.8	20034.9	23756.5	20181.7	19932.0	
65°	19394.2	19163.8	19000.7	22427.7	18925.9	18884.3	19175.8	18973.2	18866.2	22447.7	19045.5	19087.6	
70°	18688.6	18232.7	17753.2	20945.4	17633.3	17864.6	18353.0	17963.7	17547.6	20945.4	17787.4	18091.2	
75°	17815.5	17176.1	16208.6	18834.2	16020.3	16789.0	17466.9	16853.5	15931.1	18805.6	16243.1	17095.5	
80°	17111.4	16201.8	14495.8	15873.0	14138.3	15804.9	16601.9	15786.0	14123.5	15812.8	14380.7	16126.2	
85°	16556.5	15549.9	12758.0	11719.2	12441.6	14962.2	16090.9	15095.9	12339.6	11585.1	12725.0	15316.9	

Photometric test report

Family
Licross® 21 Opal

Order number: 52TE1DCN4CXM
EAN: 4058352056714

LP number
59520_106

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

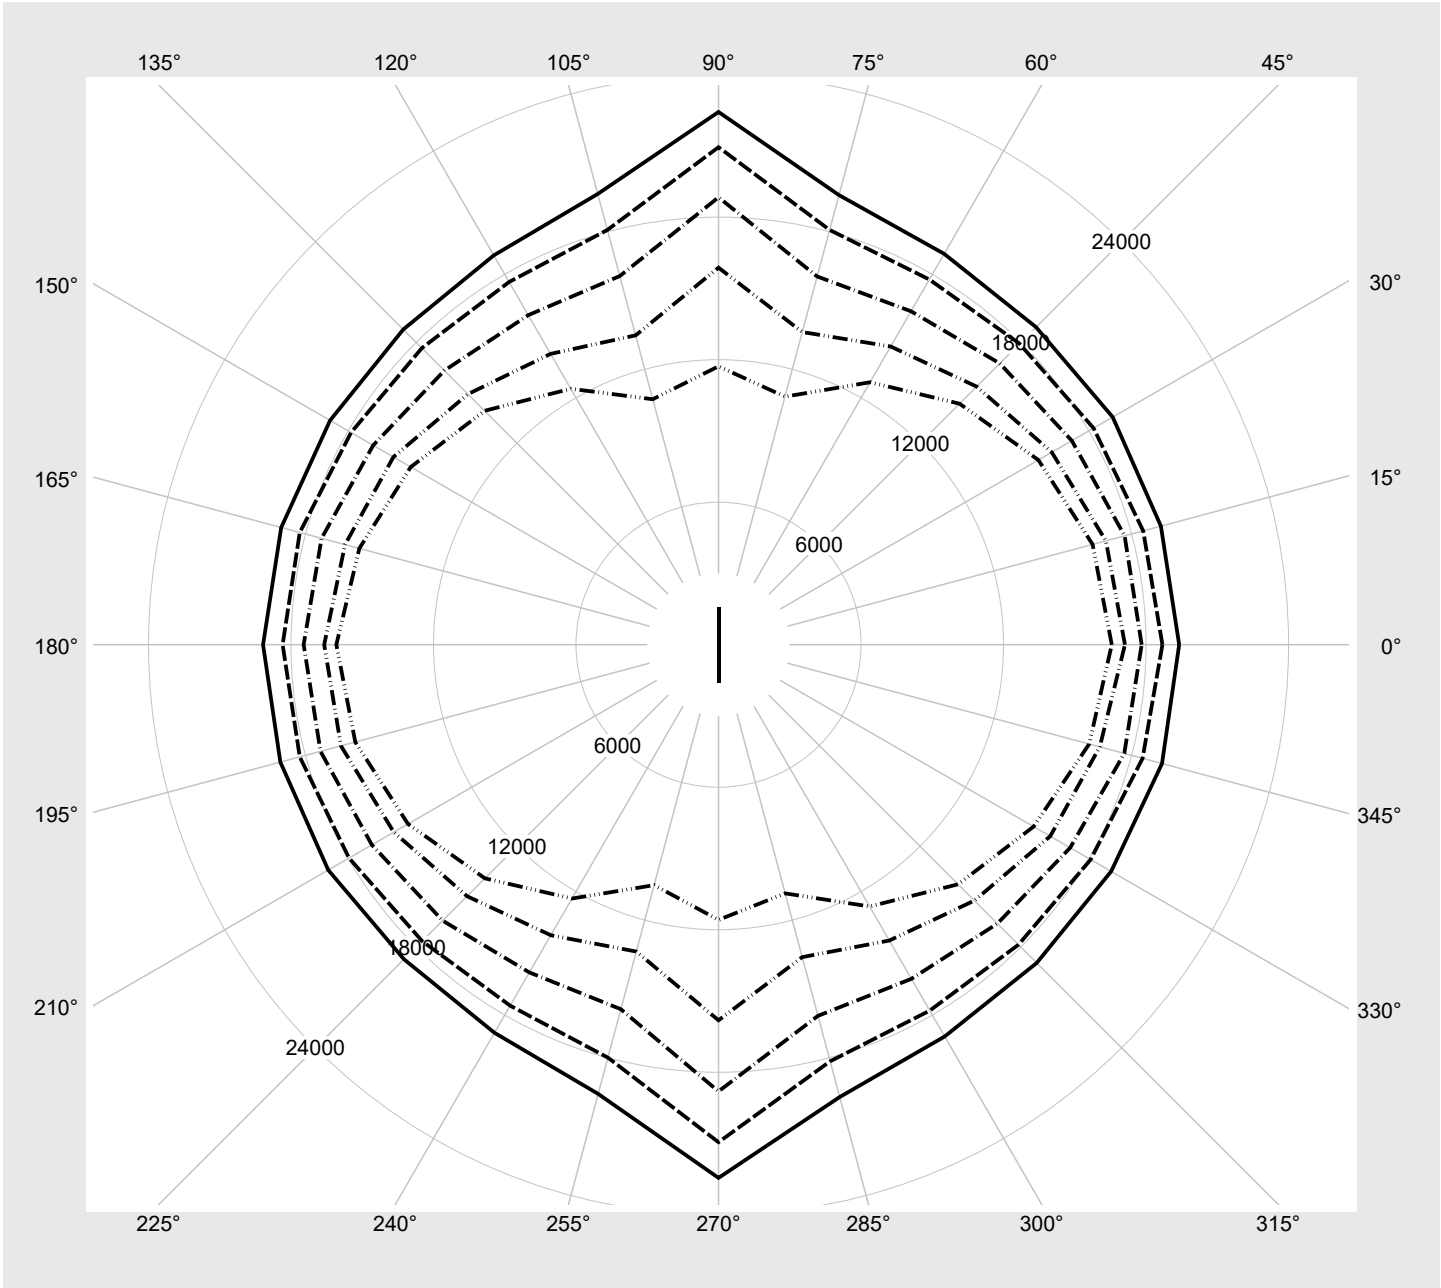

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN4CXM EAN: 4058352056714	LP number 59520_106
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	12300	68.4	83.1	75.8
2	A	C	F	11800	65.4	79.7	72.6
3	A	D	E	10800	59.4	71.9	65.6
4	A	D	F	9850	53.9	64.9	59.4
5	B	C	E	8820	47.9	57.7	52.8
6	B	C	F	7840	42.4	50.9	46.6
7	B	D	E	6860	37.1	44.2	40.7
8	B	D	F	5850	31.6	37.5	34.6