


Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DMN4AXG EAN: 4058352056752	LP number 59520_262
	Version	cover, opal, direct-/ indirect distribution, diffuse
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG Multilumen
	Rated values	Net luminous flux = 10420 lm Power consumption = 60.5 W Luminous efficacy = 172.2 lm/W
		serial documentation 09.02.2024
		siteco

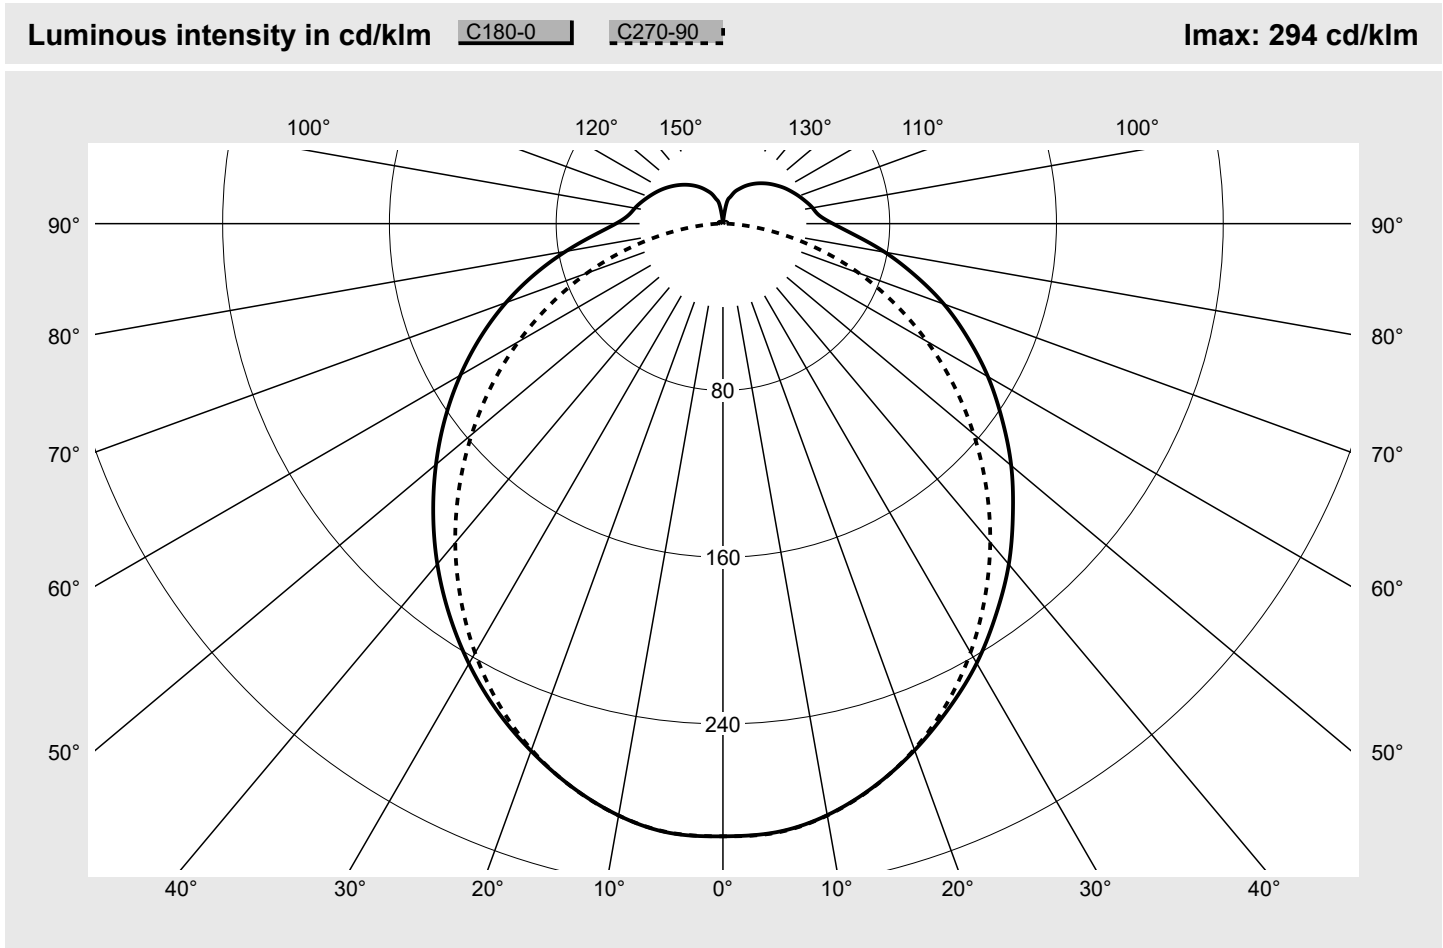

Classifications		Luminaire light output ratios	
DIN 5040	B 3 1	η_{LB}	100.0%
CIE	N1=44 N2=73 N3=91	ϕ_u	87.4%
	N4=87 N5=100	ϕ_o	12.6%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DMN4AXG EAN: 4058352056752	LP number 59520_262
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C- planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DMN4AXG EAN: 4058352056752	LP number 59520_262
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DMN4AXG EAN: 4058352056752	LP number 59520_262
----------------------------	--	------------------------

UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	21.9	23.5	22.4	23.9	24.4	21.6	23.1	22.0	23.6	24.1	
	3H	23.8	25.3	24.3	25.7	26.3	23.1	24.6	23.6	25.0	25.5	
	4H	24.6	26.0	25.2	26.5	27.0	23.6	25.0	24.1	25.5	26.0	
	6H	25.4	26.6	26.0	27.2	27.8	24.0	25.2	24.5	25.8	26.4	
	8H	25.8	26.9	26.4	27.5	28.1	24.1	25.3	24.7	25.9	26.5	
	12H	26.1	27.2	26.7	27.7	28.4	24.2	25.3	24.7	25.8	26.5	
4H	2H	22.6	23.9	23.1	24.4	25.0	22.3	23.6	22.8	24.1	24.7	
	3H	24.6	25.8	25.2	26.3	26.9	23.9	25.1	24.5	25.6	26.2	
	4H	25.7	26.7	26.2	27.2	27.9	24.7	25.7	25.2	26.2	26.9	
	6H	26.6	27.5	27.2	28.1	28.7	25.1	26.0	25.7	26.6	27.3	
	8H	27.1	27.9	27.7	28.5	29.2	25.3	26.2	25.9	26.8	27.4	
	12H	27.5	28.2	28.1	28.8	29.5	25.4	26.1	26.0	26.8	27.5	
8H	4H	25.9	26.8	26.6	27.4	28.1	25.1	25.9	25.7	26.5	27.2	
	6H	27.1	27.8	27.7	28.4	29.1	25.7	26.4	26.4	27.1	27.8	
	8H	27.7	28.3	28.3	28.9	29.7	26.0	26.6	26.6	27.3	28.0	
	12H	28.2	28.7	28.9	29.4	30.2	26.1	26.6	26.8	27.3	28.1	
12H	4H	25.9	26.7	26.6	27.3	28.0	25.1	25.8	25.7	26.4	27.2	
	6H	27.1	27.7	27.8	28.4	29.2	25.9	26.4	26.5	27.1	27.9	
	8H	27.8	28.3	28.4	29.0	29.7	26.2	26.7	26.8	27.4	28.1	

Luminance table		Max. for $\gamma \geq 65^\circ$					Photometric dimensions in mm:		L = 1500 B = 76	H(C0) = 25 H(C90) = 25	H(C180) = 25 H(C270) = 25		
C-planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m²												
45°	19134.8	19112.9	19828.8	22704.7	19908.8	19129.1	19119.0	19104.8	19846.6	22745.9	19917.7	19153.4	
50°	18440.3	18373.4	18926.4	21893.3	18955.0	18322.2	18357.6	18330.8	18916.9	21938.5	18983.5	18364.9	
55°	17718.5	17655.2	17986.5	21048.2	17996.8	17536.9	17639.5	17573.3	17966.0	21086.1	18048.2	17627.9	
60°	17097.1	16944.5	17040.5	20096.6	17017.9	16767.6	16936.8	16816.7	16972.6	20125.4	17097.0	16885.5	
65°	16429.9	16234.7	16096.5	18999.7	16033.2	15997.9	16244.9	16073.2	15982.5	19016.6	16134.5	16170.2	
70°	15832.1	15445.9	15039.7	17744.0	14938.1	15134.1	15547.9	15218.0	14865.5	17744.0	15068.7	15326.0	
75°	15092.5	14550.8	13731.2	15955.5	13571.7	14222.9	14797.2	14277.5	13496.1	15931.2	13760.4	14482.6	
80°	14496.0	13725.4	12280.1	13446.9	11977.3	13389.2	14064.4	13373.2	11964.8	13395.9	12182.7	13661.4	
85°	14025.9	13173.2	10808.0	9928.0	10540.0	12675.3	13631.5	12788.5	10453.5	9814.3	10780.1	12975.8	

Photometric test report

Family
Licross® 21 Opal

Order number: **52TE1DMN4AXG**
EAN: **4058352056752**

LP number
59520_262

Luminance values in cd/m²

γ 65°

γ 70°


γ 75°

γ 80°

γ 85°

sit

eco

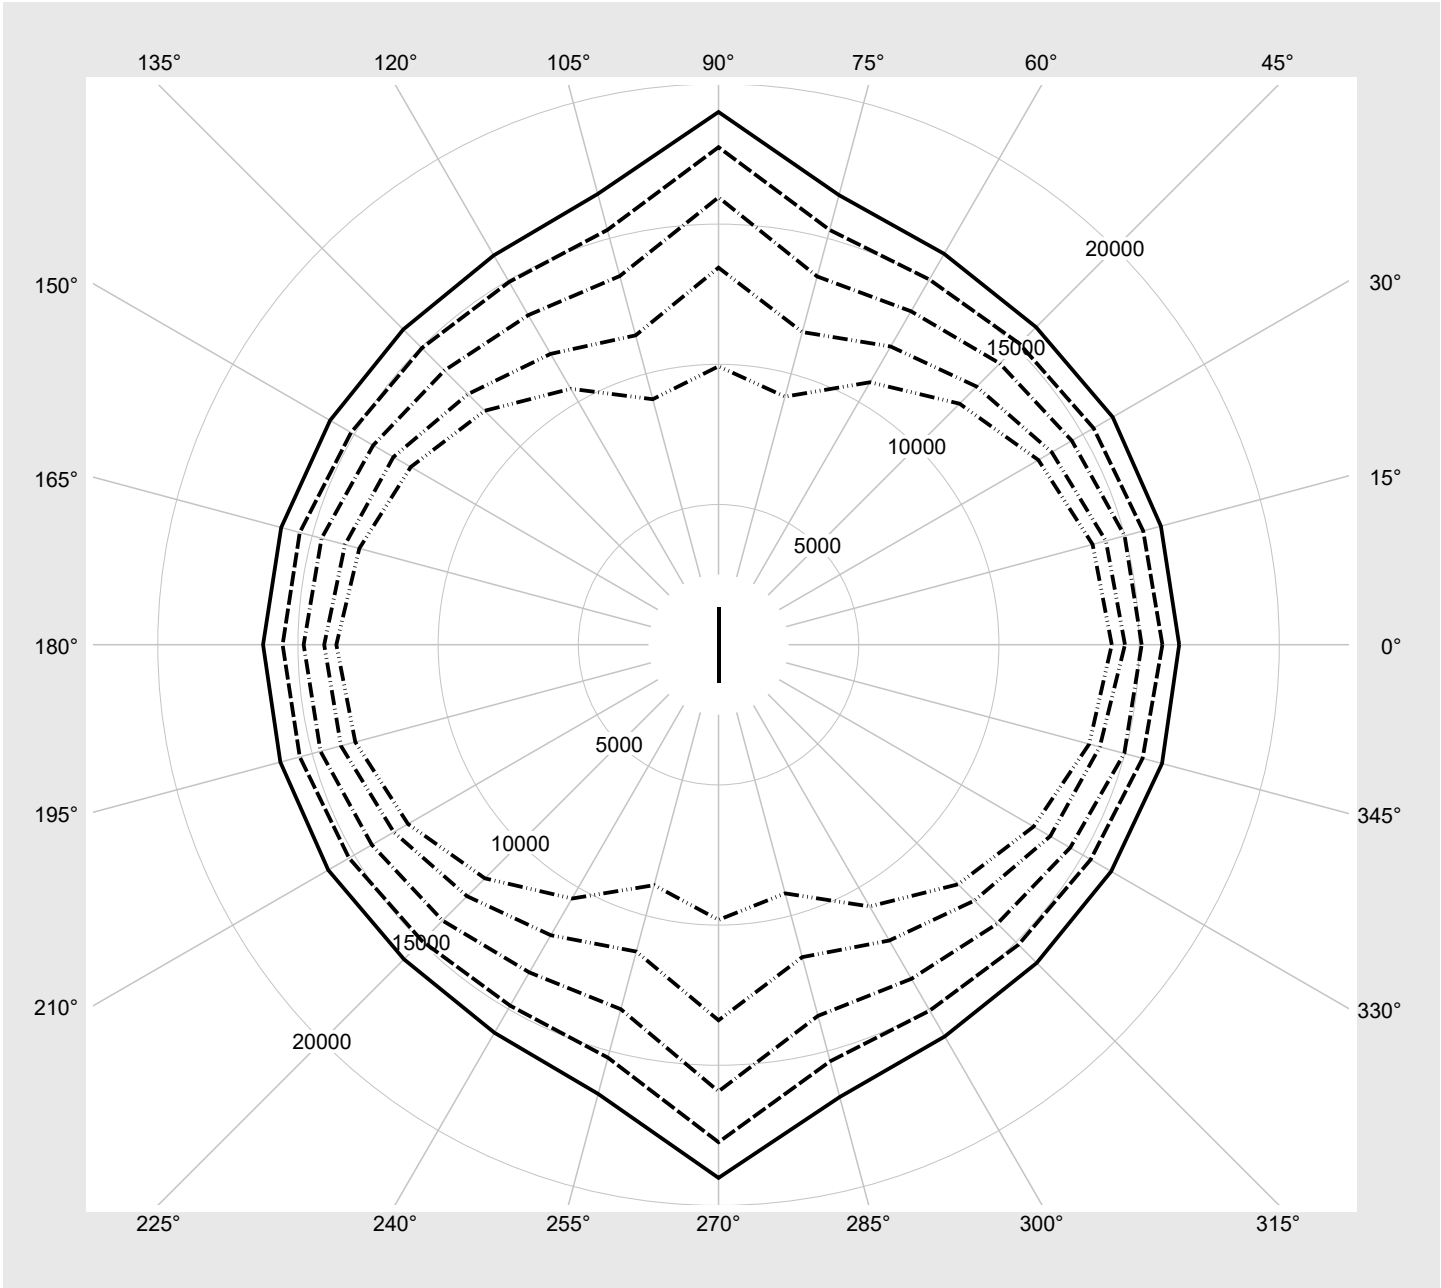

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DMN4AXG EAN: 4058352056752	LP number 59520_262
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	10420	60.5
2	A	C	F	9810	56.5
3	A	D	E	9340	53.4
4	A	D	F	8850	50.3
5	B	C	E	8360	47.3
6	B	C	F	7870	44.4
7	B	D	E	7370	41.4
8	B	D	F	6860	38.4