

Photometric test report

Family
Licross® 21 Opal

Order number: 52TL1DMN4E5M
EAN: 4058352056875

LP number
59520_261



Version cover, opal, direct-/ indirect distribution, diffuse
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 14660 lm
 Power consumption = 83.1 W
 Luminous efficacy = 176.4 lm/W

serial
documentation
09.02.2024


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 294 cd/klm

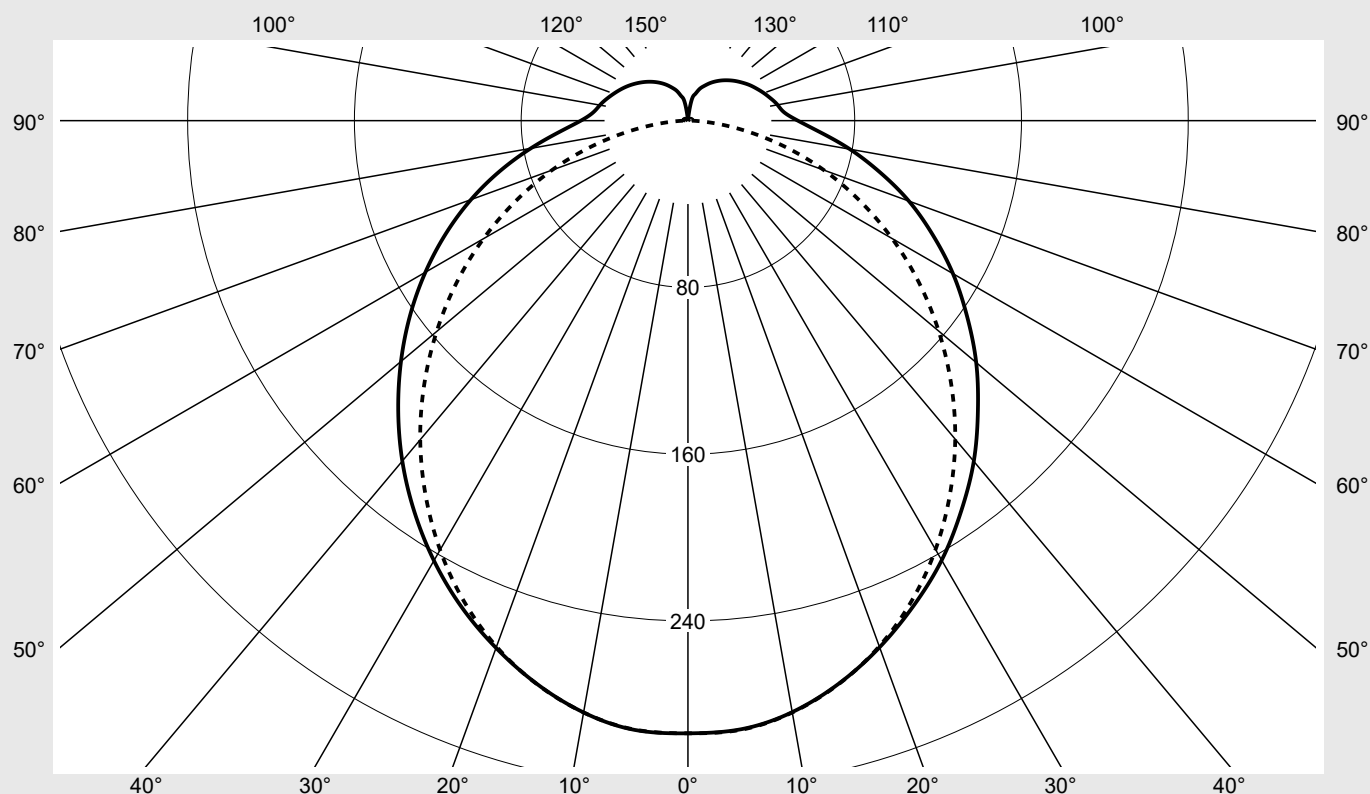

Classifications

DIN 5040 B 3 1
 CIE N1=44 N2=73 N3=91
 N4=87 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 87.4%
 ϕ_o 12.6%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1DMN4E5M EAN: 4058352056875	LP number 59520_261
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C- planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1DMN4E5M EAN: 4058352056875	LP number 59520_261
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1DMN4E5M EAN: 4058352056875	LP number 59520_261
----------------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	23.1	24.7	23.6	25.1	25.6	22.7	24.3	23.2	24.8	25.3
	3H	25.0	26.5	25.5	26.9	27.4	24.3	25.8	24.8	26.2	26.7
	4H	25.8	27.1	26.4	27.7	28.2	24.8	26.2	25.3	26.7	27.2
	6H	26.6	27.8	27.2	28.3	28.9	25.2	26.4	25.7	26.9	27.5
	8H	27.0	28.1	27.6	28.7	29.3	25.3	26.5	25.9	27.1	27.6
	12H	27.3	28.4	27.9	28.9	29.6	25.4	26.5	25.9	27.0	27.6
4H	2H	23.8	25.1	24.3	25.6	26.2	23.5	24.8	24.0	25.3	25.8
	3H	25.8	27.0	26.4	27.5	28.1	25.1	26.3	25.7	26.8	27.4
	4H	26.8	27.9	27.4	28.4	29.1	25.8	26.9	26.4	27.4	28.1
	6H	27.8	28.6	28.4	29.2	29.9	26.3	27.2	26.9	27.8	28.5
	8H	28.2	29.1	28.9	29.7	30.4	26.5	27.3	27.1	27.9	28.6
	12H	28.6	29.4	29.3	30.0	30.7	26.6	27.3	27.2	27.9	28.7
8H	4H	27.1	28.0	27.7	28.6	29.3	26.2	27.1	26.9	27.7	28.4
	6H	28.3	29.0	28.9	29.6	30.3	26.9	27.6	27.6	28.2	29.0
	8H	28.9	29.5	29.5	30.1	30.9	27.2	27.8	27.8	28.4	29.2
	12H	29.4	29.9	30.1	30.6	31.4	27.3	27.8	28.0	28.5	29.3
12H	4H	27.1	27.9	27.8	28.5	29.2	26.3	27.0	26.9	27.6	28.4
	6H	28.3	28.9	29.0	29.6	30.3	27.0	27.6	27.7	28.3	29.0
	8H	29.0	29.5	29.6	30.2	30.9	27.4	27.9	28.0	28.5	29.3

Luminance table		Max. for $\gamma \geq 65^\circ$					Photometric dimensions in mm:		L = 1500 B = 76		H(C0) = 25 H(C90) = 25		H(C180) = 25 H(C270) = 25	
C-planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°	
γ		Luminance in cd/m²												
45°		26920.9	26890.1	27897.4	31943.4	28009.9	26912.9	26898.7	26878.7	27922.4	32001.4	28022.4	26947.1	
50°		25943.9	25849.8	26627.8	30801.9	26668.0	25777.7	25827.5	25789.7	26614.4	30865.5	26708.1	25837.8	
55°		24928.4	24839.2	25305.4	29613.0	25319.9	24672.8	24817.2	24724.0	25276.5	29666.2	25392.2	24800.8	
60°		24054.1	23839.4	23974.4	28274.1	23942.6	23590.5	23828.5	23659.6	23879.0	28314.6	24053.9	23756.3	
65°		23115.4	22840.8	22646.3	26730.9	22557.3	22507.7	22855.1	22613.6	22486.0	26754.7	22699.8	22750.0	
70°		22274.4	21731.0	21159.5	24964.2	21016.6	21292.3	21874.4	21410.3	20914.5	24964.2	21200.3	21562.4	
75°		21233.8	20471.7	19318.5	22448.0	19094.2	20010.3	20818.3	20087.2	18987.8	22413.8	19359.6	20375.6	
80°		20394.6	19310.5	17277.1	18918.5	16851.0	18837.4	19787.3	18814.9	16833.4	18846.8	17139.9	19220.3	
85°		19733.1	18533.5	15205.8	13967.8	14828.8	17832.9	19178.3	17992.3	14707.2	13807.9	15166.6	18255.8	

Photometric test report

Family
Licross® 21 Opal

Order number: **52TL1DMN4E5M**
EAN: **4058352056875**

LP number
59520_261

Luminance values in cd/m²

γ 65°

γ 70°


γ 75°

γ 80°

γ 85°

sit

eco

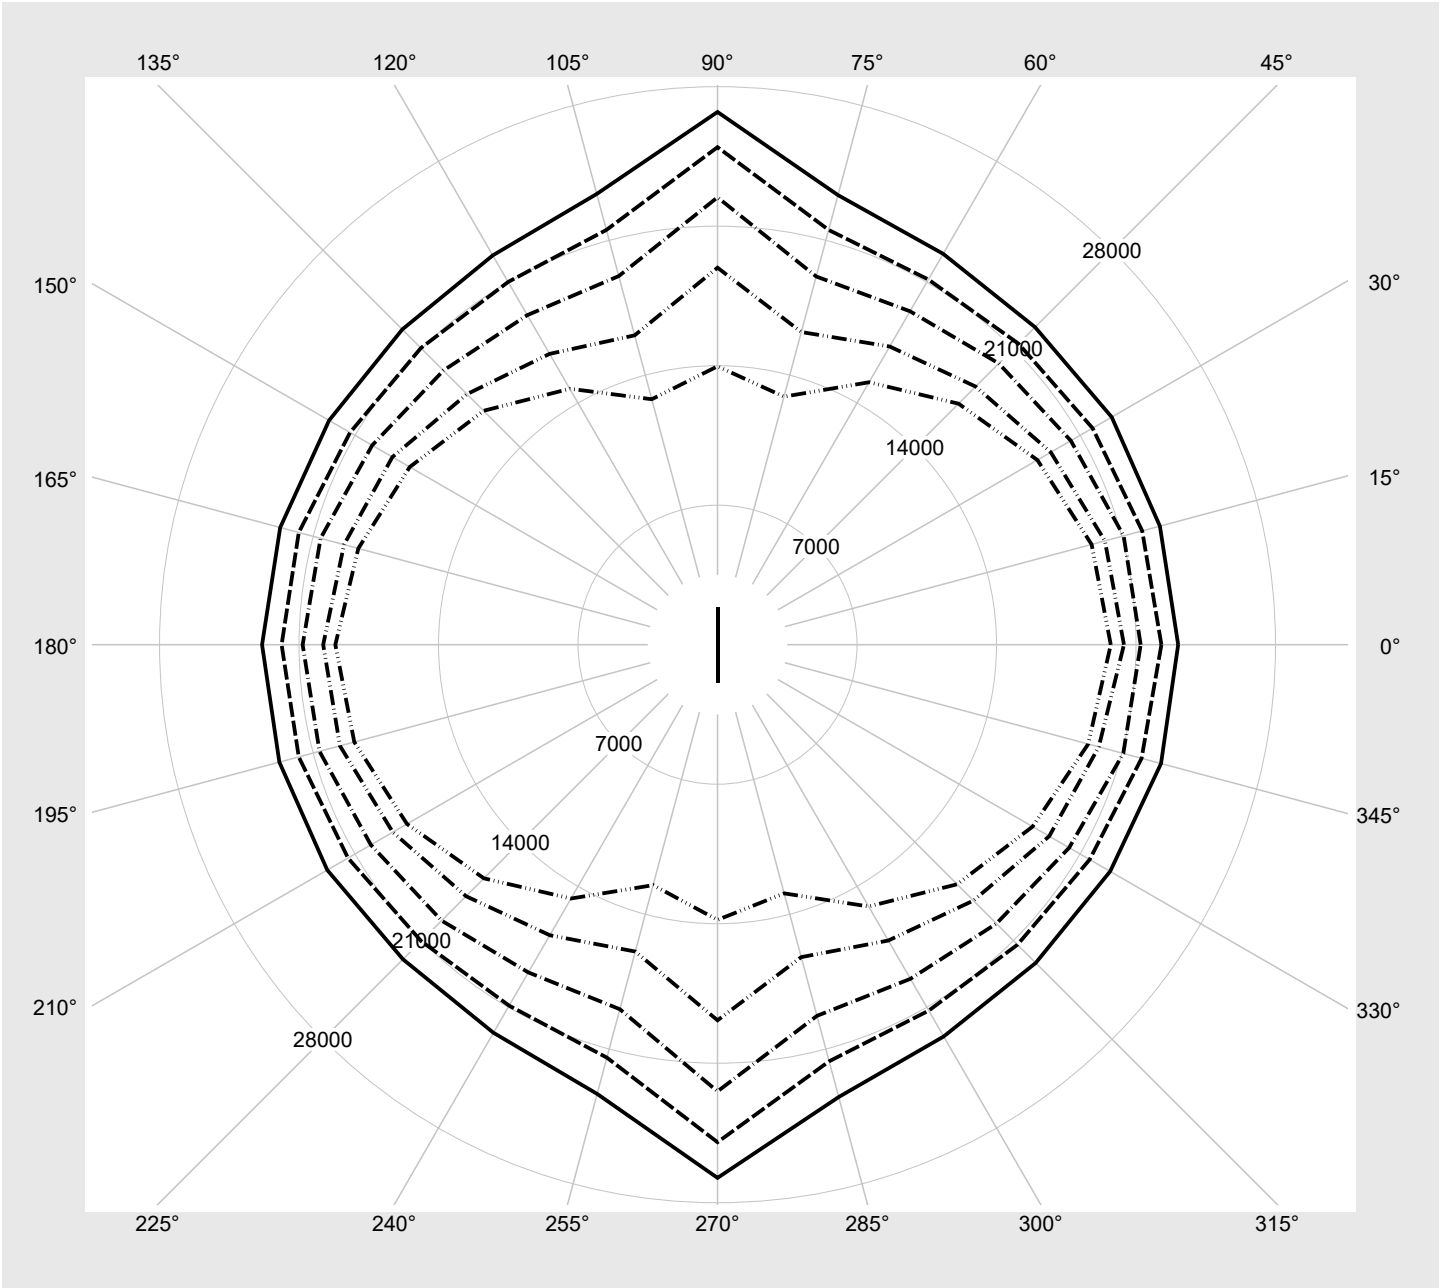

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1DMN4E5M EAN: 4058352056875	LP number 59520_261
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	14660	83.1
2	A	C	F	13770	77.5
3	A	D	E	12730	71.1
4	A	D	F	11810	65.4
5	B	C	E	10800	59.4
6	B	C	F	9850	53.9
7	B	D	E	8820	47.9
8	B	D	F	7840	42.4