


Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
	Version	cover, opal, direct-/ indirect distribution, diffuse
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG Multilumen
	Rated values	Net luminous flux = 6320 lm Power consumption = 34.3 W Luminous efficacy = 184.3 lm/W
		serial documentation 19.02.2024
		

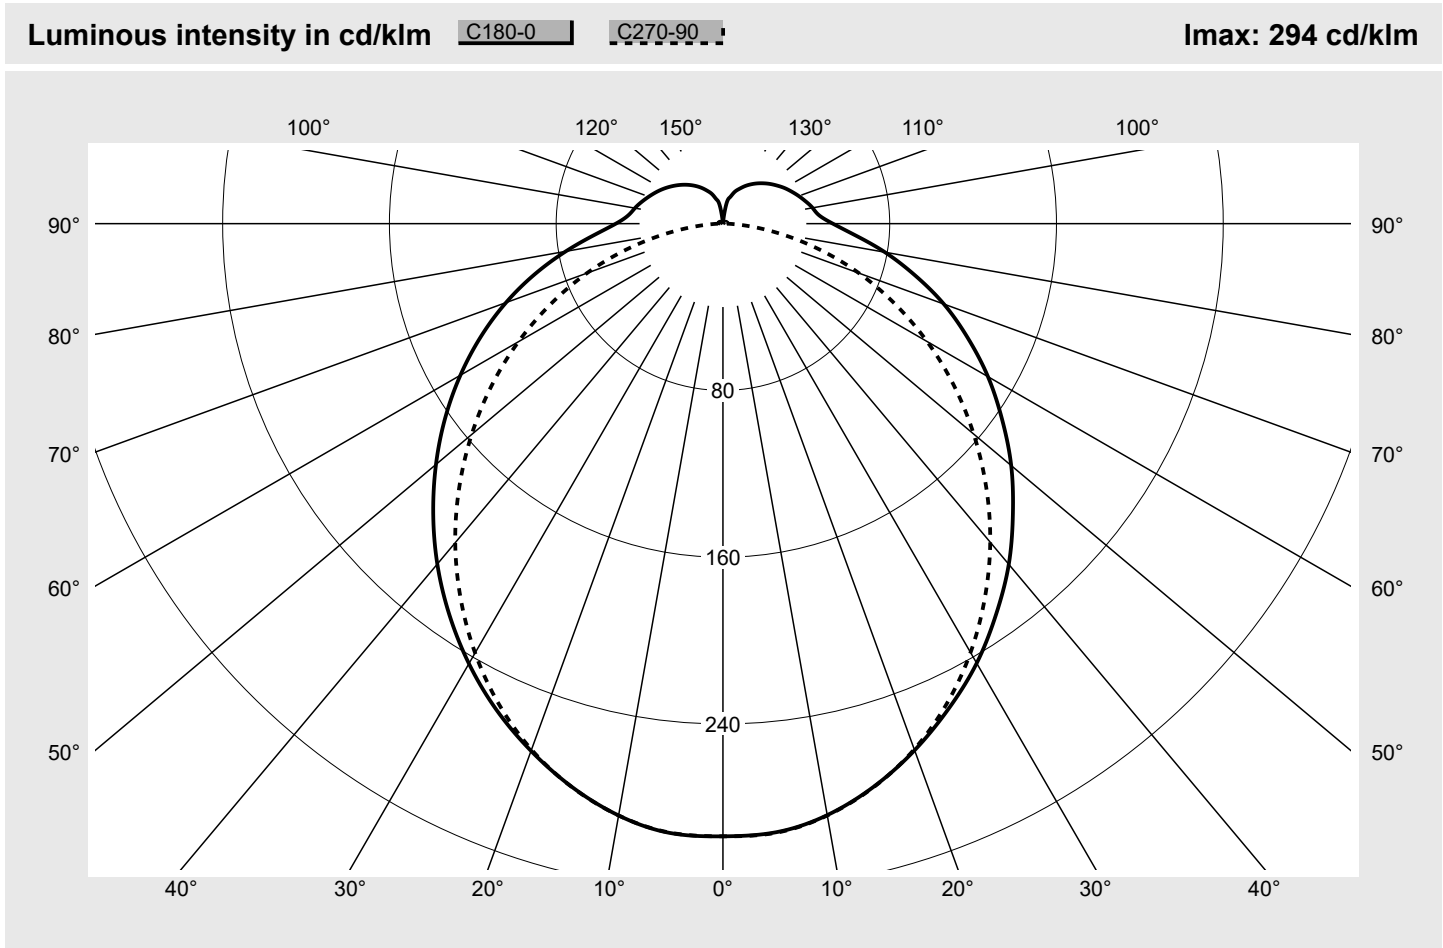

Classifications		Luminaire light output ratios	
DIN 5040	B 3 1	η_{LB}	100.0%
CIE	N1=44 N2=73 N3=91	ϕ_u	87.4%
	N4=87 N5=100	ϕ_o	12.6%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C- planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
--------------------------------	--	------------------------

UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	20.2	21.7	20.6	22.2	22.7	19.8	21.4	20.3	21.8	22.3	
	3H	22.1	23.5	22.6	24.0	24.5	21.4	22.8	21.9	23.3	23.8	
	4H	22.9	24.2	23.4	24.7	25.3	21.9	23.2	22.4	23.7	24.3	
	6H	23.7	24.9	24.2	25.4	26.0	22.3	23.5	22.8	24.0	24.6	
	8H	24.1	25.2	24.6	25.8	26.4	22.4	23.6	23.0	24.1	24.7	
	12H	24.4	25.4	25.0	26.0	26.7	22.4	23.5	23.0	24.1	24.7	
4H	2H	20.8	22.2	21.4	22.7	23.2	20.5	21.8	21.1	22.3	22.9	
	3H	22.9	24.0	23.4	24.6	25.2	22.2	23.3	22.8	23.9	24.5	
	4H	23.9	24.9	24.5	25.5	26.1	22.9	23.9	23.5	24.5	25.1	
	6H	24.8	25.7	25.4	26.3	27.0	23.4	24.3	24.0	24.9	25.6	
	8H	25.3	26.1	25.9	26.7	27.4	23.6	24.4	24.2	25.0	25.7	
	12H	25.7	26.4	26.4	27.1	27.8	23.6	24.4	24.3	25.0	25.7	
8H	4H	24.2	25.0	24.8	25.7	26.3	23.3	24.1	23.9	24.7	25.4	
	6H	25.4	26.1	26.0	26.7	27.4	24.0	24.7	24.6	25.3	26.0	
	8H	25.9	26.6	26.6	27.2	27.9	24.3	24.9	24.9	25.5	26.3	
	12H	26.5	27.0	27.2	27.7	28.5	24.4	24.9	25.1	25.6	26.4	
12H	4H	24.2	24.9	24.8	25.6	26.3	23.4	24.1	24.0	24.7	25.4	
	6H	25.4	26.0	26.1	26.7	27.4	24.1	24.7	24.8	25.4	26.1	
	8H	26.0	26.6	26.7	27.2	28.0	24.4	24.9	25.1	25.6	26.4	

Luminance table		Max. for $\gamma \geq 65^\circ$				Photometric dimensions in mm:		L = 1500 B = 76		H(C0) = 25 H(C90) = 25		H(C180) = 25 H(C270) = 25	
C-planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m²												
45°	11605.7	11592.5	12026.7	13771.0	12075.2	11602.3	11596.2	11587.5	12037.5	13796.0	12080.6	11617.0	
50°	11184.5	11144.0	11479.4	13278.9	11496.7	11112.9	11134.4	11118.1	11473.6	13306.3	11514.0	11138.8	
55°	10746.8	10708.3	10909.3	12766.3	10915.5	10636.6	10698.8	10658.7	10896.8	12789.2	10946.7	10691.8	
60°	10369.8	10277.3	10335.5	12189.1	10321.8	10170.0	10272.6	10199.8	10294.3	12206.6	10369.8	10241.5	
65°	9965.2	9846.8	9762.9	11523.8	9724.5	9703.2	9852.9	9748.8	9693.8	11534.1	9786.0	9807.6	
70°	9602.6	9368.4	9122.0	10762.2	9060.3	9179.2	9430.2	9230.1	9016.3	10762.2	9139.6	9295.6	
75°	9154.0	8825.5	8328.3	9677.4	8231.6	8626.5	8974.9	8659.7	8185.7	9662.7	8346.0	8784.0	
80°	8792.2	8324.8	7448.2	8155.9	7264.6	8120.9	8530.4	8111.2	7257.0	8125.0	7389.1	8286.0	
85°	8507.1	7989.9	6555.3	6021.6	6392.8	7687.9	8267.9	7756.6	6340.3	5952.7	6538.4	7870.2	

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL1DMN46XG
EAN: 4058352051931

LP number
59520_256

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

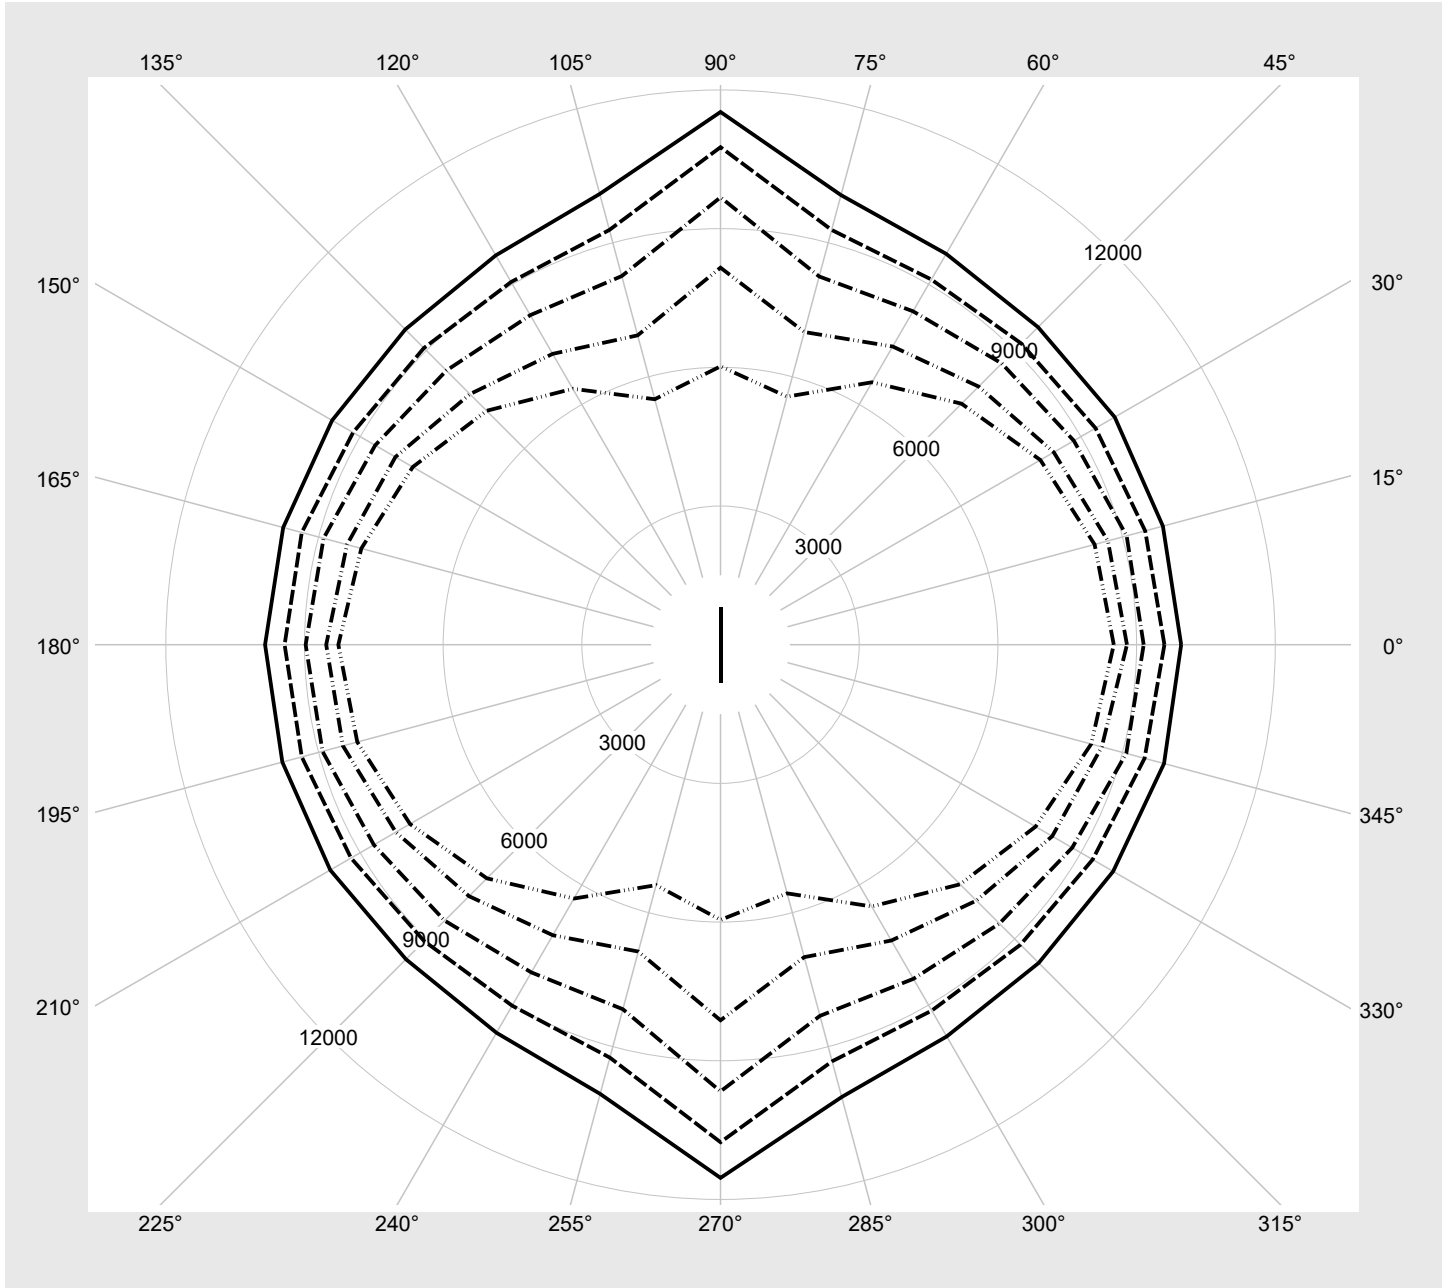

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	6320	34.3
2	A	C	F	6010	32.6
3	A	D	E	5710	30.9
4	A	D	F	5410	29.2
5	B	C	E	5090	27.4
6	B	C	F	4780	25.8
7	B	D	E	4470	24.1
8	B	D	F	4070	21.9