

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE1DMN46XG
EAN: 4058352056578

LP number
59520_267



Version cover, opal, direct-/ indirect distribution, diffuse
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 6320 lm
 Power consumption = 34.3 W
 Luminous efficacy = 184.3 lm/W

serial
documentation
20.02.2024


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 294 cd/klm

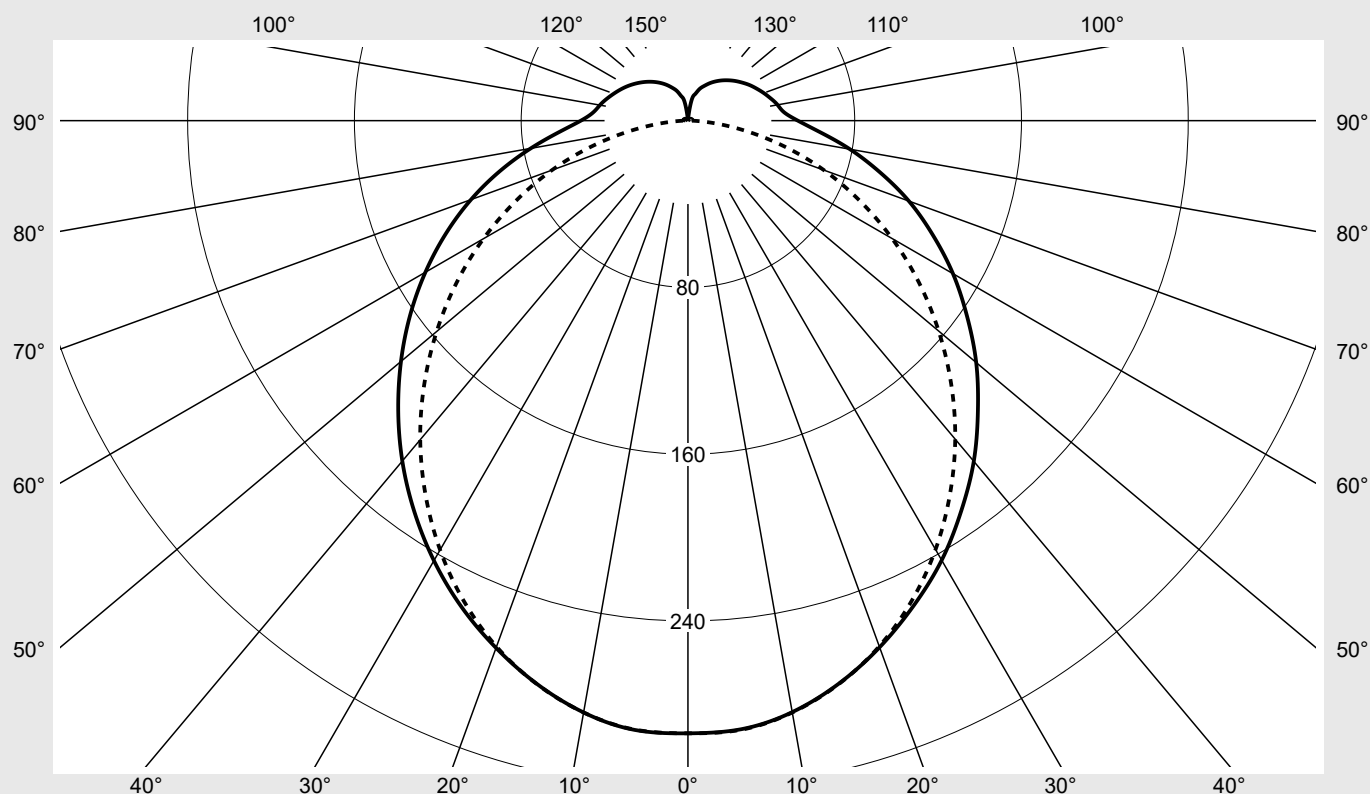

Classifications

DIN 5040 B 3 1
 CIE N1=44 N2=73 N3=91
 N4=87 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 87.4%
 ϕ_o 12.6%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DMN46XG EAN: 4058352056578	LP number 59520_267
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C- planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DMN46XG EAN: 4058352056578	LP number 59520_267
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DMN46XG EAN: 4058352056578	LP number 59520_267
--------------------------------	--	------------------------


UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	20.2	21.7	20.6	22.2	22.7	19.8	21.4	20.3	21.8	22.3	
	3H	22.1	23.5	22.6	24.0	24.5	21.4	22.8	21.9	23.3	23.8	
	4H	22.9	24.2	23.4	24.7	25.3	21.9	23.2	22.4	23.7	24.3	
	6H	23.7	24.9	24.2	25.4	26.0	22.3	23.5	22.8	24.0	24.6	
	8H	24.1	25.2	24.6	25.8	26.4	22.4	23.6	23.0	24.1	24.7	
	12H	24.4	25.4	25.0	26.0	26.7	22.4	23.5	23.0	24.1	24.7	
4H	2H	20.8	22.2	21.4	22.7	23.2	20.5	21.8	21.1	22.3	22.9	
	3H	22.9	24.0	23.4	24.6	25.2	22.2	23.3	22.8	23.9	24.5	
	4H	23.9	24.9	24.5	25.5	26.1	22.9	23.9	23.5	24.5	25.1	
	6H	24.8	25.7	25.4	26.3	27.0	23.4	24.3	24.0	24.9	25.6	
	8H	25.3	26.1	25.9	26.7	27.4	23.6	24.4	24.2	25.0	25.7	
	12H	25.7	26.4	26.4	27.1	27.8	23.6	24.4	24.3	25.0	25.7	
8H	4H	24.2	25.0	24.8	25.7	26.3	23.3	24.1	23.9	24.7	25.4	
	6H	25.4	26.1	26.0	26.7	27.4	24.0	24.7	24.6	25.3	26.0	
	8H	25.9	26.6	26.6	27.2	27.9	24.3	24.9	24.9	25.5	26.3	
	12H	26.5	27.0	27.2	27.7	28.5	24.4	24.9	25.1	25.6	26.4	
12H	4H	24.2	24.9	24.8	25.6	26.3	23.4	24.1	24.0	24.7	25.4	
	6H	25.4	26.0	26.1	26.7	27.4	24.1	24.7	24.8	25.4	26.1	
	8H	26.0	26.6	26.7	27.2	28.0	24.4	24.9	25.1	25.6	26.4	

Luminance table		Max. for $\gamma \geq 65^\circ$				Photometric dimensions in mm:		L = 1500 B = 76		H(C0) = 25 H(C90) = 25		H(C180) = 25 H(C270) = 25	
C-planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ		Luminance in cd/m²											
45°		11605.7	11592.5	12026.7	13771.0	12075.2	11602.3	11596.2	11587.5	12037.5	13796.0	12080.6	11617.0
50°		11184.5	11144.0	11479.4	13278.9	11496.7	11112.9	11134.4	11118.1	11473.6	13306.3	11514.0	11138.8
55°		10746.8	10708.3	10909.3	12766.3	10915.5	10636.6	10698.8	10658.7	10896.8	12789.2	10946.7	10691.8
60°		10369.8	10277.3	10335.5	12189.1	10321.8	10170.0	10272.6	10199.8	10294.3	12206.6	10369.8	10241.5
65°		9965.2	9846.8	9762.9	11523.8	9724.5	9703.2	9852.9	9748.8	9693.8	11534.1	9786.0	9807.6
70°		9602.6	9368.4	9122.0	10762.2	9060.3	9179.2	9430.2	9230.1	9016.3	10762.2	9139.6	9295.6
75°		9154.0	8825.5	8328.3	9677.4	8231.6	8626.5	8974.9	8659.7	8185.7	9662.7	8346.0	8784.0
80°		8792.2	8324.8	7448.2	8155.9	7264.6	8120.9	8530.4	8111.2	7257.0	8125.0	7389.1	8286.0
85°		8507.1	7989.9	6555.3	6021.6	6392.8	7687.9	8267.9	7756.6	6340.3	5952.7	6538.4	7870.2

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DMN46XG EAN: 4058352056578	LP number 59520_267
Luminance values in cd/m²		
γ 65° γ 70° γ 75° γ 80° γ 85°		

siteco

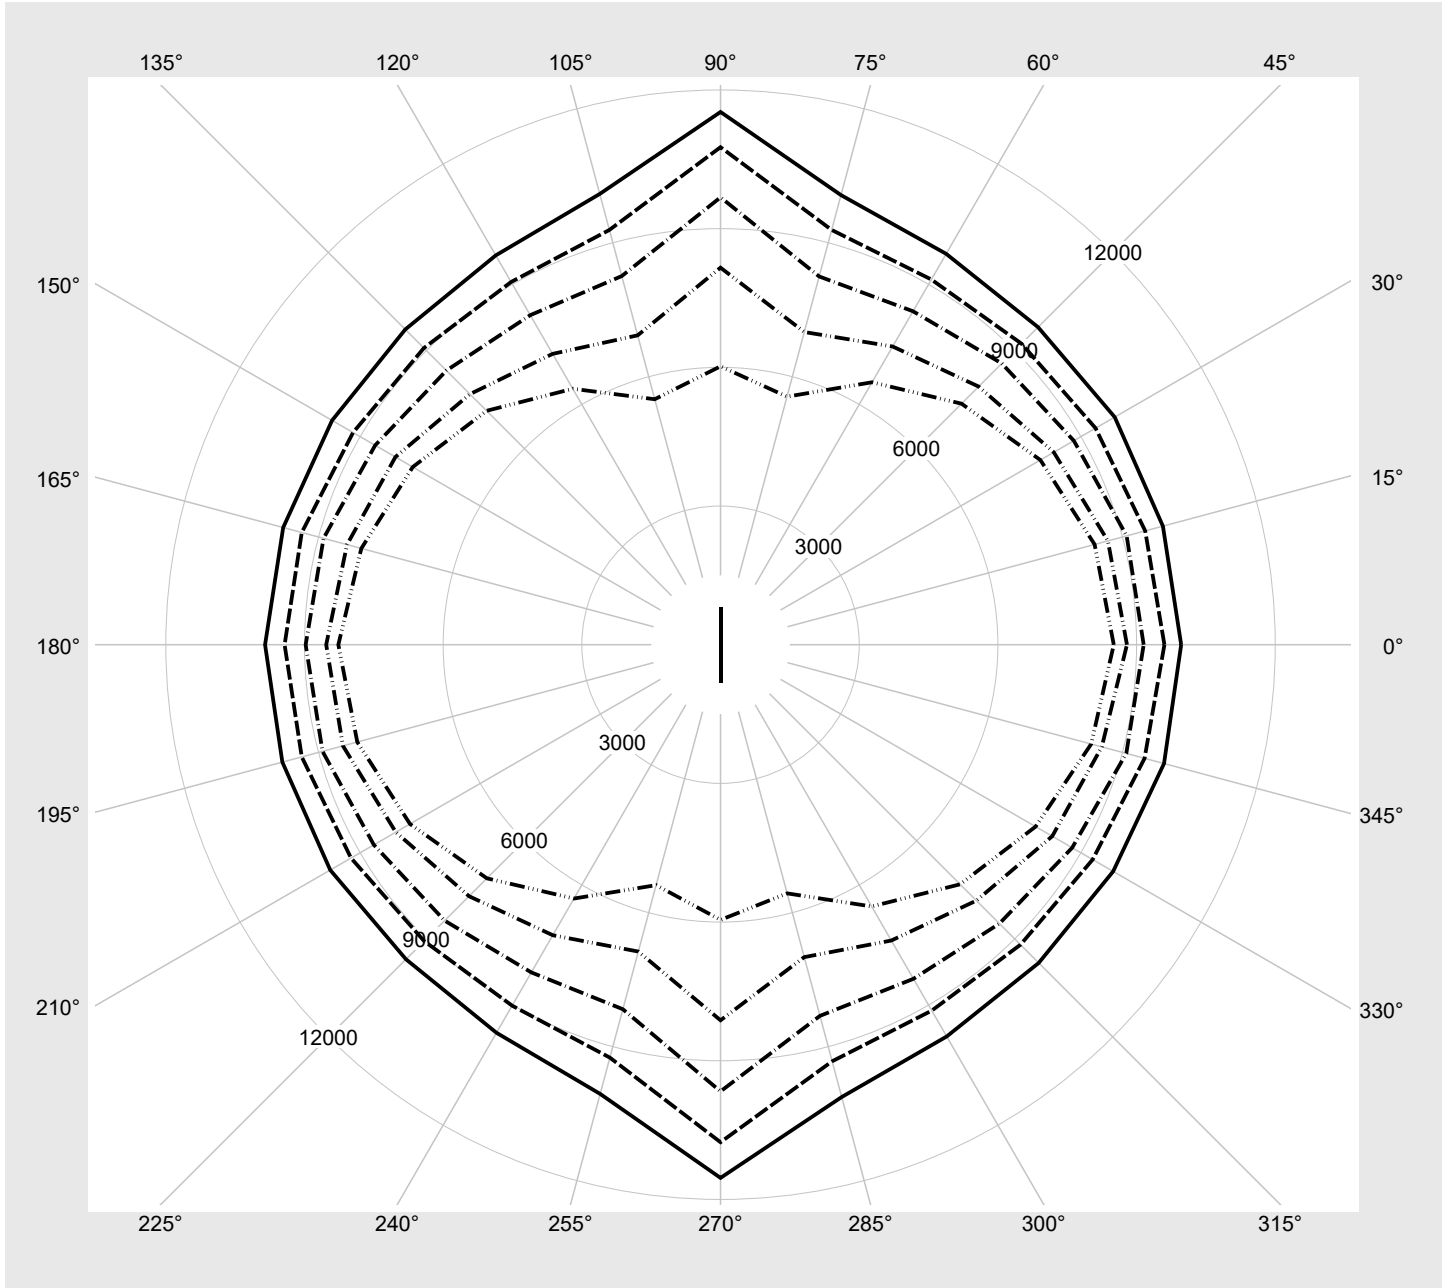

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DMN46XG EAN: 4058352056578	LP number 59520_267
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	6320	34.3
2	A	C	F	6010	32.6
3	A	D	E	5710	30.9
4	A	D	F	5410	29.2
5	B	C	E	5090	27.4
6	B	C	F	4780	25.8
7	B	D	E	4470	24.1
8	B	D	F	4070	21.9