


Photometric test report

Family Licross® 21 Performance	Order number: 52TM16CN445G EAN: 4058352903421	LP number 58520_390
	Version	cover frosted, direct-/ indirect distribution, UGR≤19 (L65≤3000cd/m²)
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-Multilumen CLOi
	Rated values	Net luminous flux = 4500 lm Power consumption = 24.1 W Luminous efficacy = 186.7 lm/W
		serial documentation 20.02.2024
		siteco

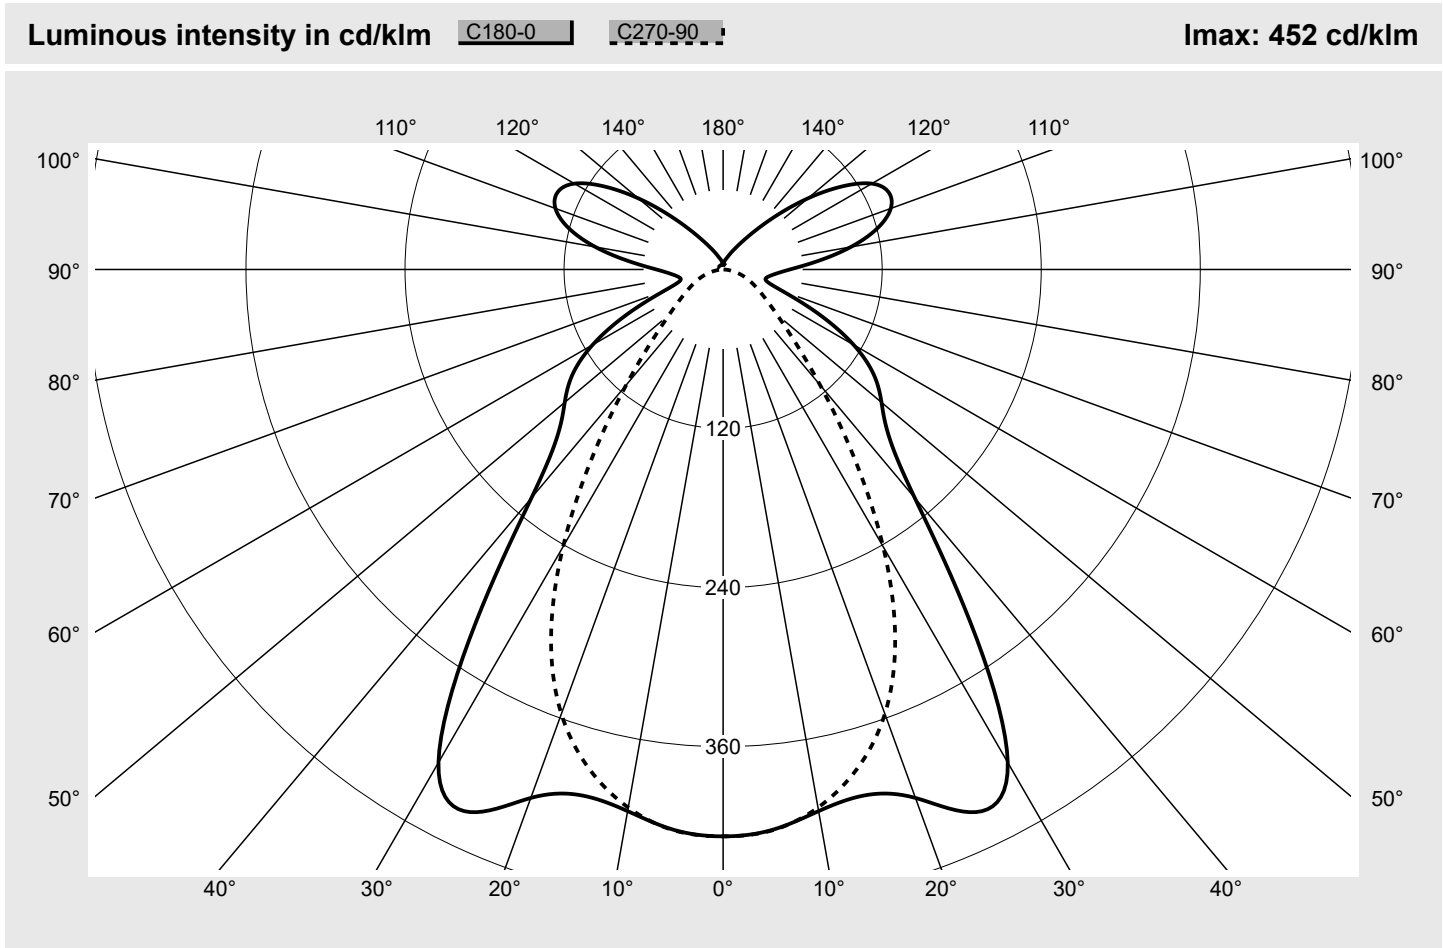

Classifications		Luminaire light output ratios	
DIN 5040	B 5 1	η_{LB}	100.0%
CIE	N1=65 N2=88 N3=96	ϕ_u	79.3%
	N4=79 N5=100	ϕ_o	20.7%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Performance	Order number: 52TM16CN445G EAN: 4058352903421	LP number 58520_390
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	427.7	427.7	427.7	427.7	427.7	427.7	427.7	2.6	2.6
5°	424.4	422.4	420.2	422.1	424.3	424.4	424.8	20.2	22.8
10°	414.9	412.5	408.9	409.5	411.2	411.6	412.2	39.1	61.9
15°	410.8	406.7	398.1	393.2	390.9	389.7	390.1	56.3	118.2
20°	424.3	415.5	394.5	375.8	364.0	357.7	356.8	71.8	190.0
25°	451.7	439.9	403.9	360.3	329.2	311.6	307.2	85.9	275.8
30°	429.5	430.9	412.5	347.4	284.5	251.0	241.5	94.2	370.0
35°	325.6	344.5	379.3	329.0	231.5	183.8	171.0	89.9	460.0
40°	224.9	238.5	293.1	289.7	177.2	125.7	113.8	76.0	535.9
45°	176.4	174.8	199.5	224.7	128.0	84.3	75.7	60.6	596.5
50°	156.0	144.3	136.6	154.2	90.2	58.9	53.2	48.2	644.7
55°	139.0	122.9	98.4	99.7	63.9	43.4	39.8	38.7	683.4
60°	113.7	99.1	72.2	64.7	46.3	33.0	30.8	30.7	714.1
65°	79.7	70.2	51.6	43.8	34.5	25.6	24.0	23.0	737.1
70°	47.7	43.4	35.6	31.1	26.2	19.7	18.2	16.2	753.3
75°	33.9	31.2	26.1	23.2	19.9	14.4	12.7	12.2	765.5
80°	33.7	30.7	23.7	18.2	15.1	9.9	7.5	10.6	776.1
85°	39.3	35.6	26.3	17.2	11.4	6.2	3.2	10.7	786.9
90°	50.4	45.6	32.3	18.9	10.0	3.9	0.6	12.4	799.3
95°	71.3	63.5	42.3	22.5	11.4	4.6	1.0	16.4	815.7
100°	97.9	84.6	52.5	26.5	12.9	5.3	1.6	20.8	836.6
105°	120.7	101.7	62.6	30.2	14.2	6.1	2.4	24.4	860.9
110°	134.6	112.6	69.4	33.2	15.3	6.7	2.9	26.3	887.2
115°	137.8	115.5	72.0	34.6	16.0	7.2	3.2	26.1	913.3
120°	129.6	108.9	68.7	33.6	15.7	7.4	3.5	23.8	937.1
125°	109.1	92.2	59.5	30.3	14.7	7.4	3.7	19.5	956.6
130°	83.4	71.0	47.4	25.5	13.2	7.2	3.7	14.5	971.2
135°	58.6	50.3	35.1	20.5	11.4	6.8	3.7	10.0	981.2
140°	39.2	34.3	25.3	16.3	9.8	6.3	3.7	6.7	987.9
145°	26.6	23.8	18.6	13.0	8.2	5.4	3.7	4.4	992.3
150°	18.7	17.2	14.2	10.0	6.9	5.0	3.7	2.9	995.2
155°	13.8	12.8	10.8	7.8	6.8	4.4	3.6	2.0	997.2
160°	10.2	9.8	7.9	6.8	5.6	4.6	3.5	1.3	998.5
165°	8.2	7.8	6.5	5.6	5.0	4.1	3.7	0.8	999.3
170°	6.4	5.6	4.7	4.7	5.0	4.1	3.9	0.5	999.8
175°	4.2	3.7	4.1	4.1	4.1	4.2	4.2	0.2	1000.0
180°	3.7	3.7	3.7	3.7	3.7	3.7	3.7	0.0	1000.0

Photometric test report

Family Licross® 21 Performance	Order number: 52TM16CN445G EAN: 4058352903421	LP number 58520_390
-----------------------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.3	17.6	16.9	18.1	18.8	12.5	13.8	13.1	14.3	15.0
	3H	16.9	18.0	17.5	18.6	19.3	12.9	14.0	13.5	14.6	15.3
	4H	17.1	18.1	17.7	18.7	19.4	13.1	14.2	13.7	14.8	15.5
	6H	17.3	18.2	18.0	18.9	19.6	13.3	14.2	13.9	14.8	15.6
	8H	17.6	18.4	18.3	19.0	19.8	13.2	14.1	13.9	14.8	15.5
	12H	17.9	18.6	18.6	19.3	20.1	13.3	14.1	13.9	14.8	15.5
4H	2H	16.3	17.4	16.9	18.0	18.7	13.0	14.0	13.6	14.6	15.3
	3H	17.0	17.8	17.6	18.5	19.3	13.5	14.4	14.2	15.0	15.8
	4H	17.2	18.0	17.9	18.7	19.5	13.8	14.6	14.5	15.3	16.1
	6H	17.7	18.3	18.4	19.0	19.9	14.0	14.7	14.7	15.4	16.2
	8H	18.0	18.6	18.7	19.3	20.2	14.1	14.7	14.8	15.4	16.3
	12H	18.5	19.0	19.3	19.8	20.7	14.1	14.7	14.9	15.4	16.3
8H	4H	17.2	17.8	17.9	18.5	19.4	14.0	14.6	14.7	15.3	16.1
	6H	17.8	18.3	18.5	19.0	19.9	14.4	14.8	15.1	15.6	16.5
	8H	18.3	18.7	19.0	19.5	20.3	14.5	15.0	15.3	15.7	16.6
	12H	19.0	19.4	19.8	20.2	21.1	14.6	15.0	15.4	15.8	16.7
12H	4H	17.1	17.7	17.9	18.4	19.3	14.0	14.5	14.8	15.2	16.1
	6H	17.7	18.2	18.5	18.9	19.8	14.5	14.9	15.2	15.6	16.6
	8H	18.3	18.7	19.1	19.4	20.4	14.7	15.1	15.5	15.8	16.8

Luminance table		Max. for $\gamma \geq 65^\circ$			Photometric dimensions in mm:	L = 1480 B = 115	H(C0) = 36 H(C90) = 0	H(C180) = 36 H(C270) = 0
C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
γ	Luminance in cd/m²							
45°	5023.8	5018.4	5868.8	6879.2	4139.9	2916.3	2828.9	
50°	4673.3	4361.9	4245.2	5019.1	3127.8	2210.6	2187.0	
55°	4427.7	3957.5	3270.4	3492.8	2407.2	1793.0	1833.6	
60°	3898.2	3440.1	2596.9	2473.4	1928.0	1532.5	1628.5	
65°	2985.1	2662.3	2040.1	1858.2	1618.1	1365.9	1503.6	
70°	1981.6	1832.2	1577.3	1497.1	1413.8	1244.8	1409.5	
75°	1599.3	1496.2	1325.8	1297.9	1285.1	1132.2	1298.5	
80°	1850.5	1723.3	1422.0	1227.1	1220.0	1034.8	1143.0	
85°	2602.2	2426.8	1945.7	1478.4	1236.9	978.2	973.2	

Photometric test report

Family
Licross® 21 Performance

Order number: 52TM16CN445G
EAN: 4058352903421

LP number
58520_390

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

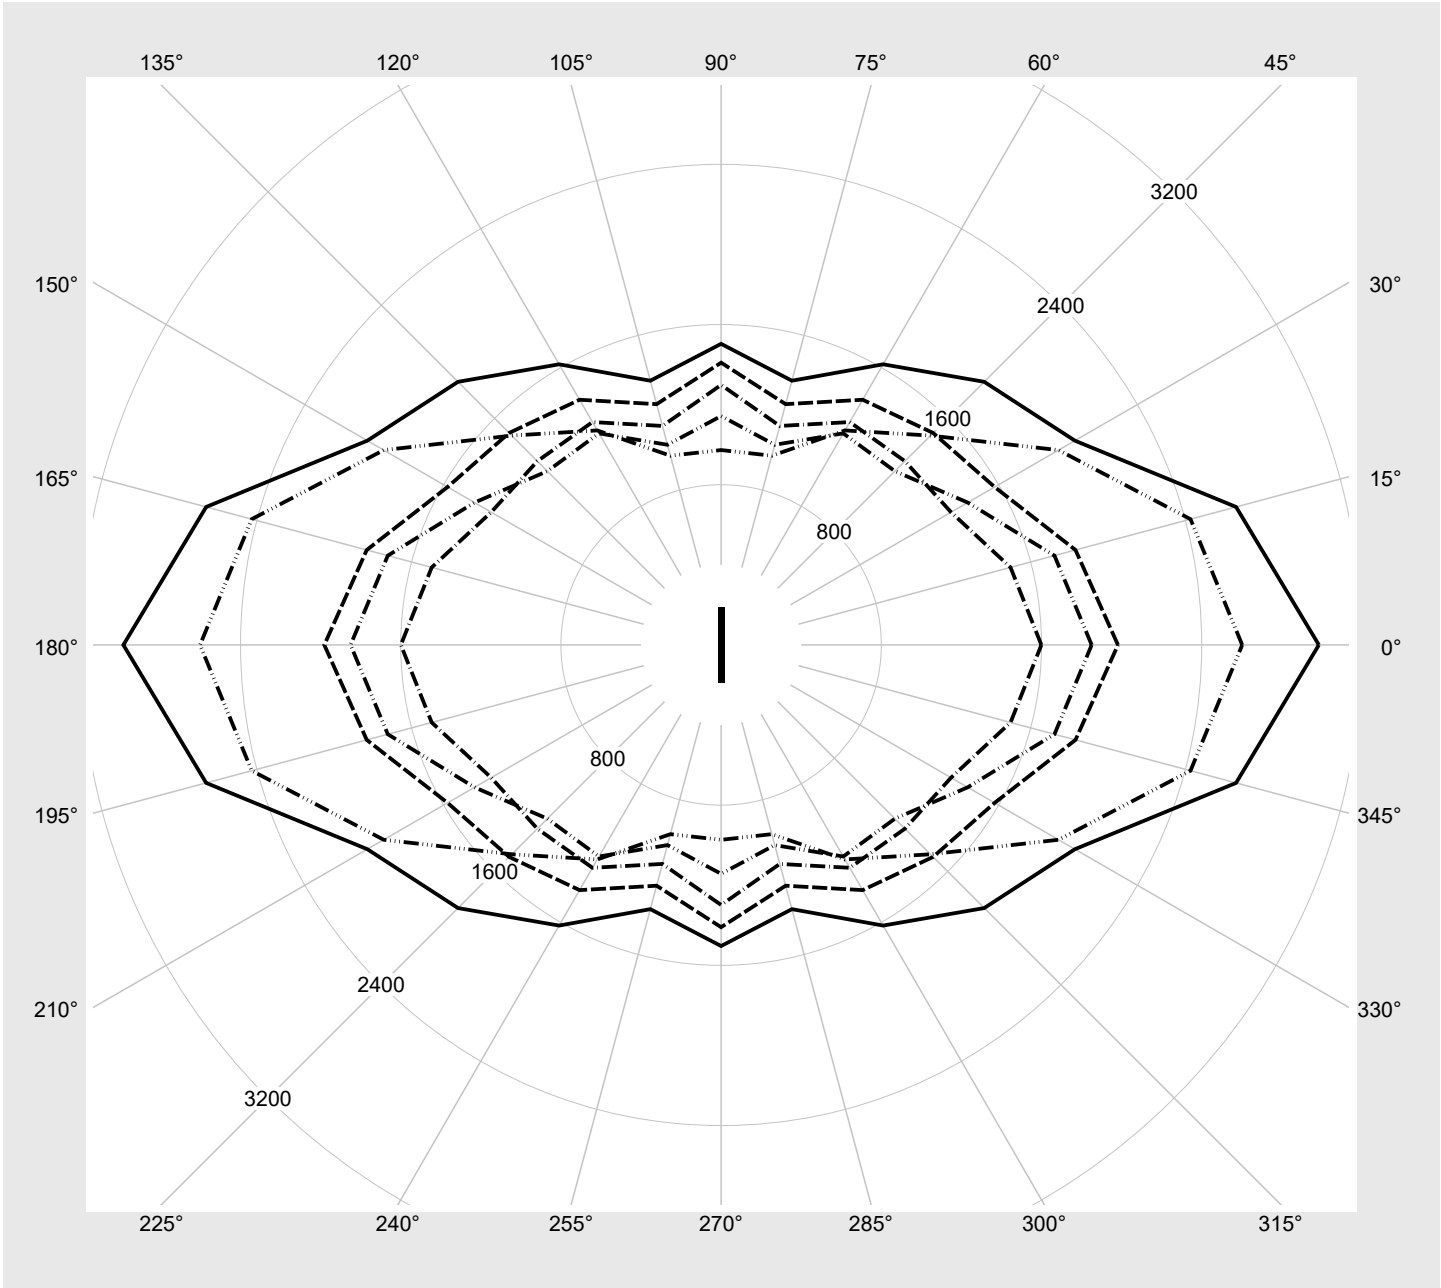

Photometric test report

Family Licross® 21 Performance	Order number: 52TM16CN445G EAN: 4058352903421	LP number 58520_390
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	4500	24.1	28.2	26.2
2	A	C	F	4420	23.7	27.9	25.8
3	A	D	E	4340	23.2	27.4	25.3
4	A	D	F	4270	22.8	27.0	24.9
5	B	C	E	4180	22.3	26.2	24.2
6	B	C	F	4100	22.0	25.7	23.8