

Photometric test report

Family
Silhouette® 21

Order number: **51LN12MNM70A3G**
EAN: **4058352011645**

LP number
59582_24



Version

surface-mounted luminaire, white, diffuser,
PMMA, opal, with homogeneous illumination,
extremely wide distribution, adjustable color
temperature: 3000K | 4000K | 5000K,
emergency light element 3h operating duration

Lamps

LED 4000 K | CRI ≥ 80

Controlgear

ECG Multilumen

Setting

colour temperature 4000K

Rated values

Net luminous flux = 7150 lm
Power consumption = 48.5 W
Luminous efficacy = 147.4 lm/W

serial
documentation
14.03.2024


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 296 cd/klm

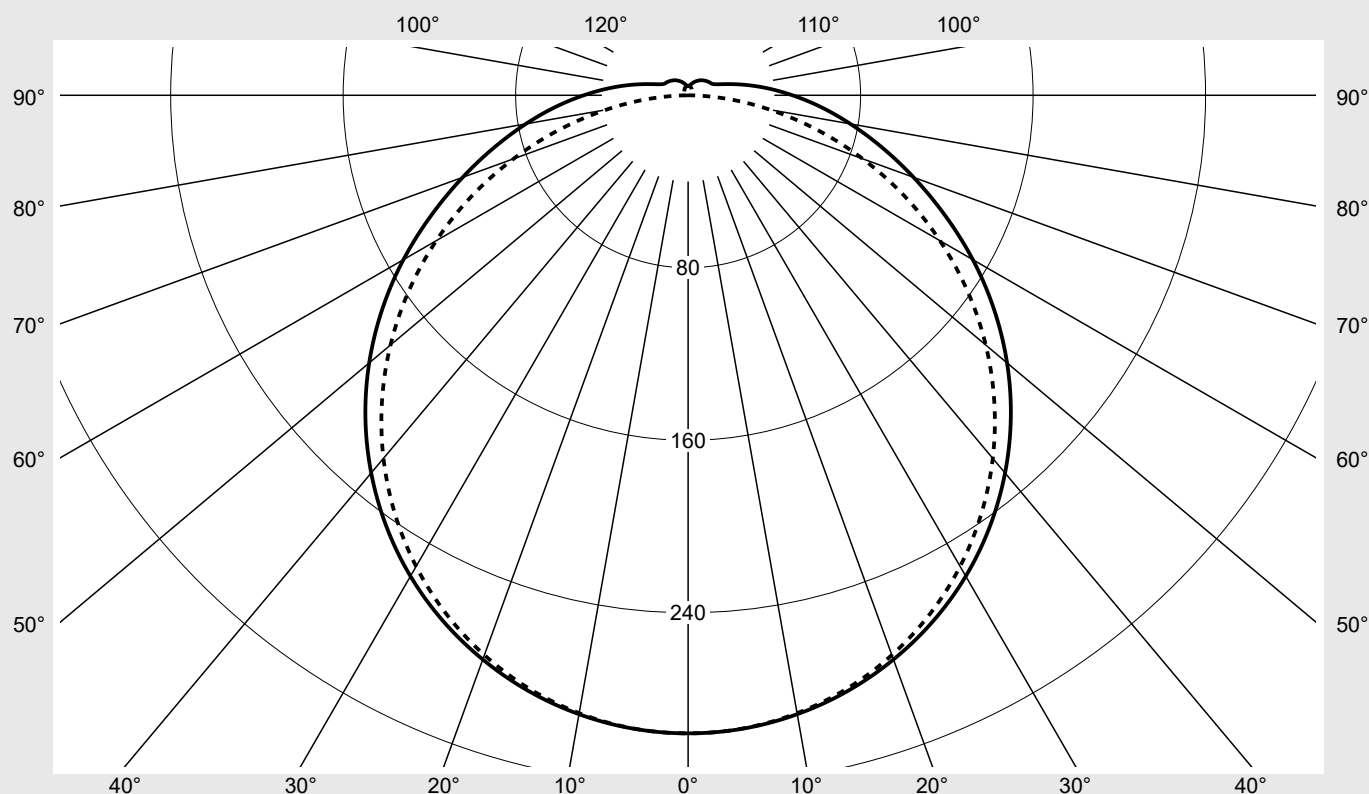

Classifications

DIN 5040 A 3 1
CIE N1=43 N2=73 N3=92
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 93.9%
 ϕ_o 6.1%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silhouette® 21	Order number: 51LN12MNM70A3G EAN: 4058352011645	LP number 59582_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	295.9	295.9	295.9	295.9	295.9	295.9	295.9	1.8	1.8
5°	294.8	294.8	294.8	294.8	294.7	294.7	294.7	14.1	15.9
10°	291.5	291.5	291.4	291.2	291.1	291.0	291.0	27.7	43.6
15°	286.0	286.0	285.8	285.5	285.1	284.9	284.9	40.5	84.1
20°	278.5	278.4	277.9	277.3	276.8	276.4	276.3	52.0	136.1
25°	269.0	268.7	268.0	267.0	266.1	265.6	265.4	61.9	197.9
30°	257.6	257.2	256.2	254.8	253.4	252.6	252.3	69.8	267.8
35°	244.0	243.7	242.4	240.6	238.6	237.4	237.0	75.6	343.4
40°	228.7	228.2	226.6	224.4	222.0	220.3	219.8	79.0	422.4
45°	211.7	211.0	209.2	206.5	203.7	201.4	200.8	80.0	502.4
50°	193.1	192.3	190.2	187.0	183.7	181.0	180.2	78.4	580.9
55°	173.2	172.4	169.9	166.3	162.4	159.2	158.1	74.5	655.4
60°	152.5	151.5	148.7	144.5	140.0	136.2	134.9	68.4	723.8
65°	131.3	130.2	126.9	122.2	117.0	112.6	110.8	60.4	784.2
70°	111.3	109.8	105.4	99.6	93.6	88.4	86.2	51.1	835.3
75°	92.9	91.2	86.0	78.5	70.7	64.7	62.0	41.3	876.7
80°	76.4	74.5	68.7	60.2	50.1	42.0	38.6	31.8	908.5
85°	61.7	59.7	53.7	44.6	33.4	22.3	17.3	23.0	931.5
90°	48.4	46.4	40.5	31.6	20.6	9.3	0.5	15.8	947.3
95°	37.0	35.0	29.6	21.4	11.8	3.6	0.6	10.9	958.2
100°	27.5	25.8	21.0	14.1	7.2	3.0	0.8	7.7	965.9
105°	20.0	18.6	14.7	9.9	5.9	2.9	1.1	5.5	971.4
110°	14.9	13.8	11.4	8.5	5.7	3.0	1.4	4.3	975.7
115°	12.5	11.8	10.3	8.2	5.5	3.0	1.6	3.8	979.5
120°	11.7	11.3	10.0	7.7	5.3	3.1	1.8	3.5	983.0
125°	11.1	10.6	9.3	7.1	5.1	3.1	2.0	3.1	986.2
130°	10.5	10.0	8.7	6.8	4.9	3.2	2.2	2.8	989.0
135°	9.8	9.4	8.0	6.3	4.7	3.2	2.4	2.4	991.4
140°	9.1	8.7	7.2	5.9	4.6	3.3	2.7	2.1	993.5
145°	8.3	8.0	6.6	5.5	4.4	3.5	3.0	1.8	995.3
150°	7.5	7.2	6.0	5.1	4.3	3.7	3.3	1.5	996.7
155°	6.8	6.3	5.5	4.8	4.2	3.9	3.6	1.1	997.9
160°	6.0	5.4	4.9	4.5	4.2	4.0	3.8	0.9	998.7
165°	5.3	4.7	4.4	4.4	4.3	4.2	4.1	0.6	999.4
170°	4.8	4.2	4.3	4.3	4.3	4.3	4.2	0.4	999.8
175°	4.4	4.0	4.2	4.3	4.4	4.4	4.4	0.2	1000.0
180°	4.3	4.3	4.3	4.3	4.3	4.3	4.3	0.0	1000.0

Photometric test report

Family Silhouette® 21	Order number: 51LN12MNM70A3G EAN: 4058352011645	LP number 59582_24
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.6	21.3	19.9	21.6	21.9	19.6	21.3	19.9	21.6	22.0
	3H	21.4	23.0	21.8	23.3	23.7	21.3	22.9	21.6	23.2	23.6
	4H	22.3	23.8	22.7	24.1	24.5	22.0	23.5	22.4	23.8	24.2
	6H	23.1	24.5	23.5	24.9	25.3	22.5	23.9	22.9	24.3	24.7
	8H	23.6	24.9	24.0	25.2	25.6	22.7	24.1	23.2	24.4	24.8
	12H	23.9	25.2	24.4	25.6	26.0	22.9	24.1	23.3	24.5	24.9
4H	2H	20.3	21.8	20.7	22.2	22.6	20.4	21.9	20.8	22.2	22.6
	3H	22.4	23.7	22.8	24.0	24.4	22.2	23.5	22.6	23.9	24.3
	4H	23.4	24.6	23.8	25.0	25.4	23.1	24.2	23.5	24.6	25.1
	6H	24.4	25.4	24.8	25.9	26.3	23.7	24.8	24.2	25.2	25.6
	8H	24.9	25.9	25.4	26.3	26.8	24.0	24.9	24.4	25.4	25.8
	12H	25.4	26.3	25.9	26.7	27.2	24.2	25.0	24.6	25.5	26.0
8H	4H	23.8	24.7	24.2	25.2	25.6	23.5	24.4	23.9	24.9	25.3
	6H	25.0	25.8	25.5	26.3	26.8	24.3	25.1	24.8	25.6	26.1
	8H	25.6	26.3	26.1	26.8	27.3	24.6	25.4	25.1	25.9	26.4
	12H	26.3	26.9	26.8	27.4	27.9	24.9	25.6	25.4	26.0	26.6
12H	4H	23.8	24.7	24.3	25.2	25.6	23.6	24.4	24.1	24.9	25.4
	6H	25.1	25.8	25.6	26.3	26.8	24.5	25.2	25.0	25.7	26.2
	8H	25.8	26.4	26.3	26.9	27.4	24.9	25.5	25.4	26.0	26.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1433 B = 148		H(C0) = 30 H(C90) = 0		H(C180) = 30 H(C270) = 0	
C-planes	0° 180°	15°	30°	45°	60°	75°	90° 270°				
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°					
γ	Luminance in cd/m²										
45°	8391.1	8414.7	8484.5	8610.9	8817.8	9124.2	9574.3				
50°	8157.5	8179.0	8248.9	8378.2	8595.2	8933.2	9451.0				
55°	7896.6	7918.4	7985.1	8111.8	8337.6	8702.6	9294.4				
60°	7609.3	7630.6	7687.1	7805.0	8028.0	8417.6	9093.1				
65°	7300.9	7313.8	7353.2	7453.2	7665.0	8071.6	8842.0				
70°	7046.0	7039.9	7011.3	7046.7	7216.8	7618.0	8495.3				
75°	6891.2	6864.6	6768.2	6660.3	6683.5	7049.4	8074.1				
80°	6900.5	6850.2	6683.5	6444.5	6178.8	6288.8	7498.3				
85°	7191.3	7126.4	6909.5	6537.1	5989.2	5401.6	6691.5				

Photometric test report

Family
Silhouette® 21

Order number: 51LN12MNM70A3G
EAN: 4058352011645

LP number
59582_24

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

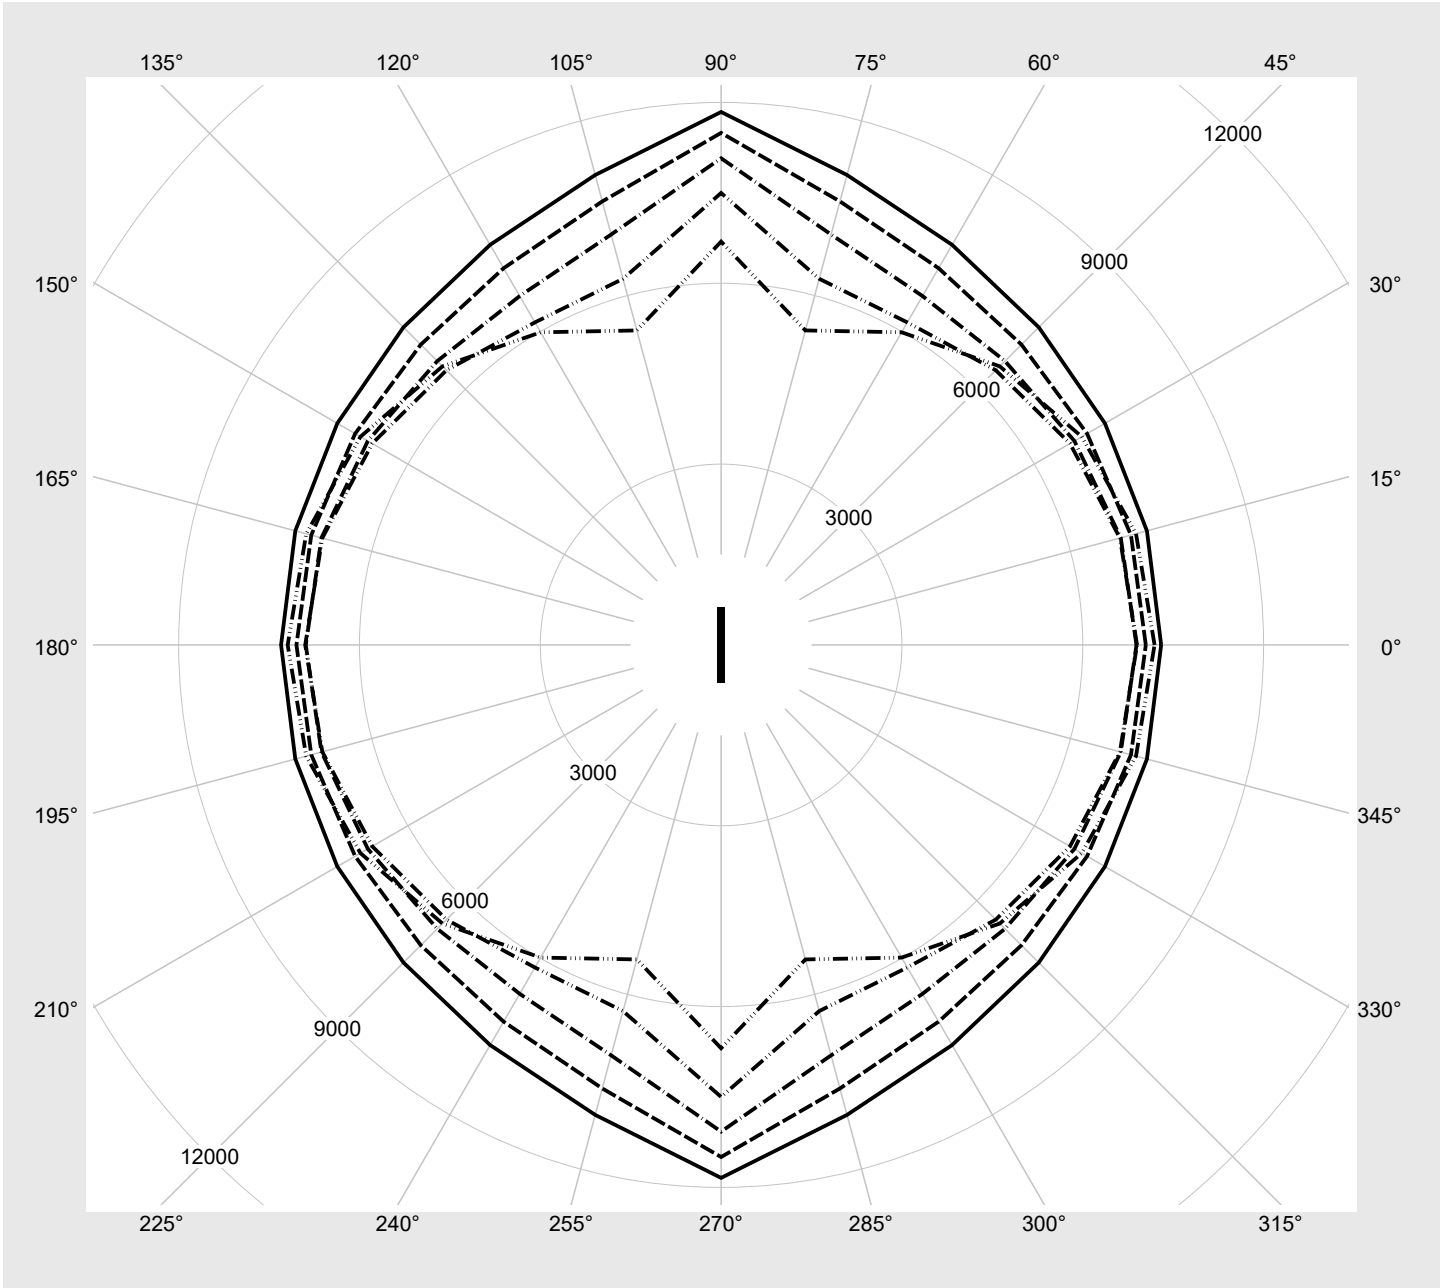

Photometric test report

Family Silhouette® 21	Order number: 51LN12MNM70A3G EAN: 4058352011645	LP number 59582_24
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
4	OFF	OFF	ON	4250	28.2
2	OFF	ON	OFF	5310	35.4
1	ON	OFF	OFF	6290	42.2
0	OFF	OFF	OFF	7150	48.5