

Photometric test report

Family

Streetlight 31 midi toolless



Order number: 5XH7H4AA08MA

EAN: 4069025096487

LP number

59066_1383

Version

post-top or side-entry mounting

Optic

direct, asymmetric
A520002

Cover

toughened safety glass

Lamps

LED 4000 K | CRI ≥ 70

Controlgear

ECG SITECO


Rated values

Net luminous flux = 19840 lm
Power consumption = 145.3 W
Luminous efficacy = 136.5 lm/W

serial documentation

10.04.2024


siteco

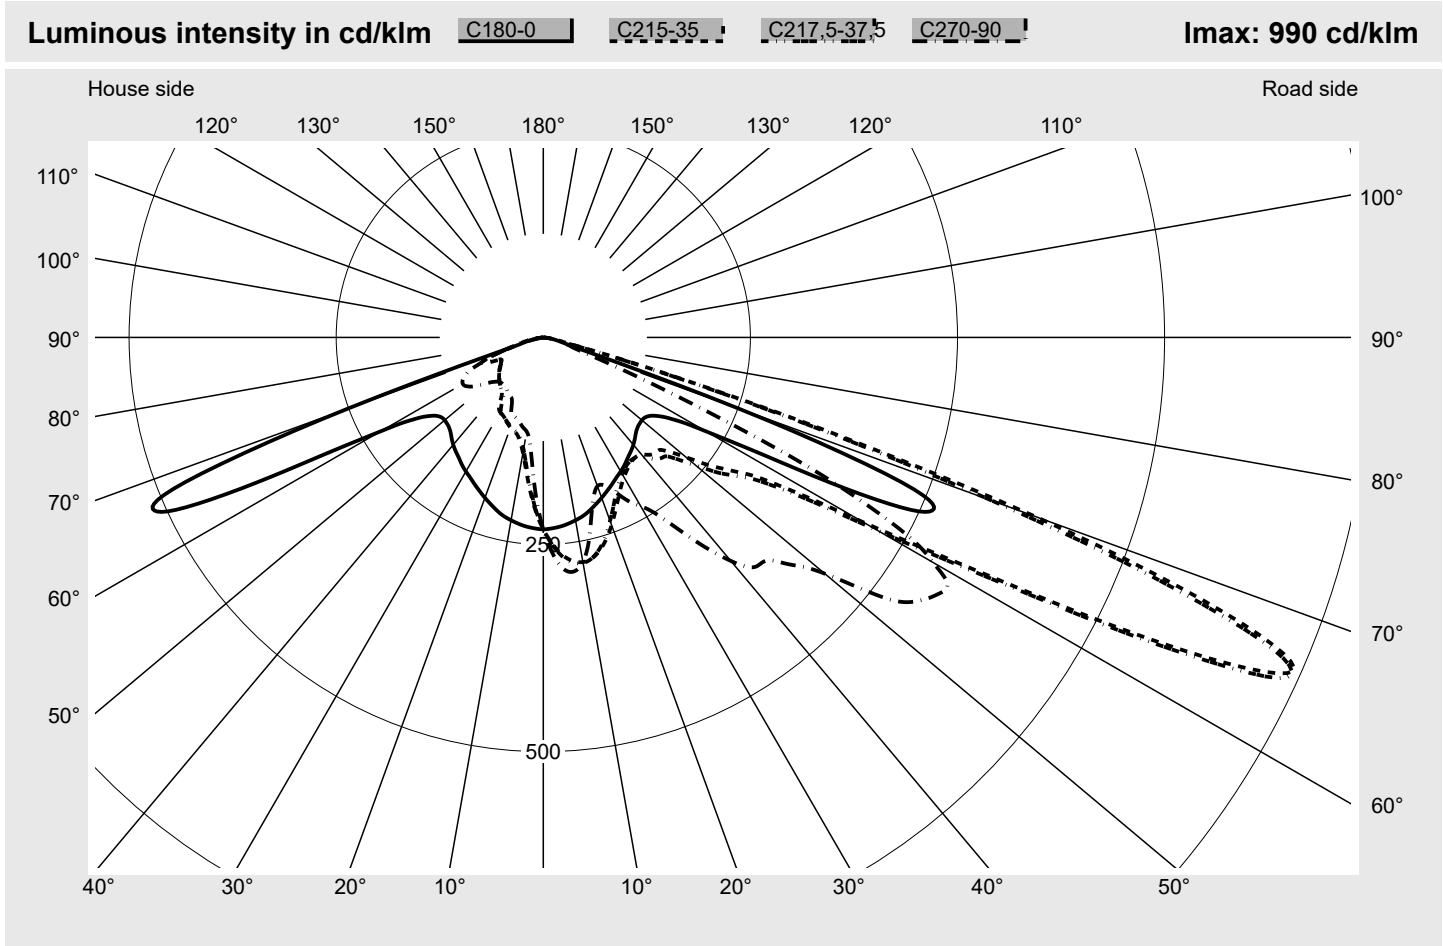

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	685.4
Eta 90° - 180°	0.0%	Imax 80°	32.5
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Envelope curve in cd/klm KMK 66° KMK 65° KMK 64° KMK 63°		siteco

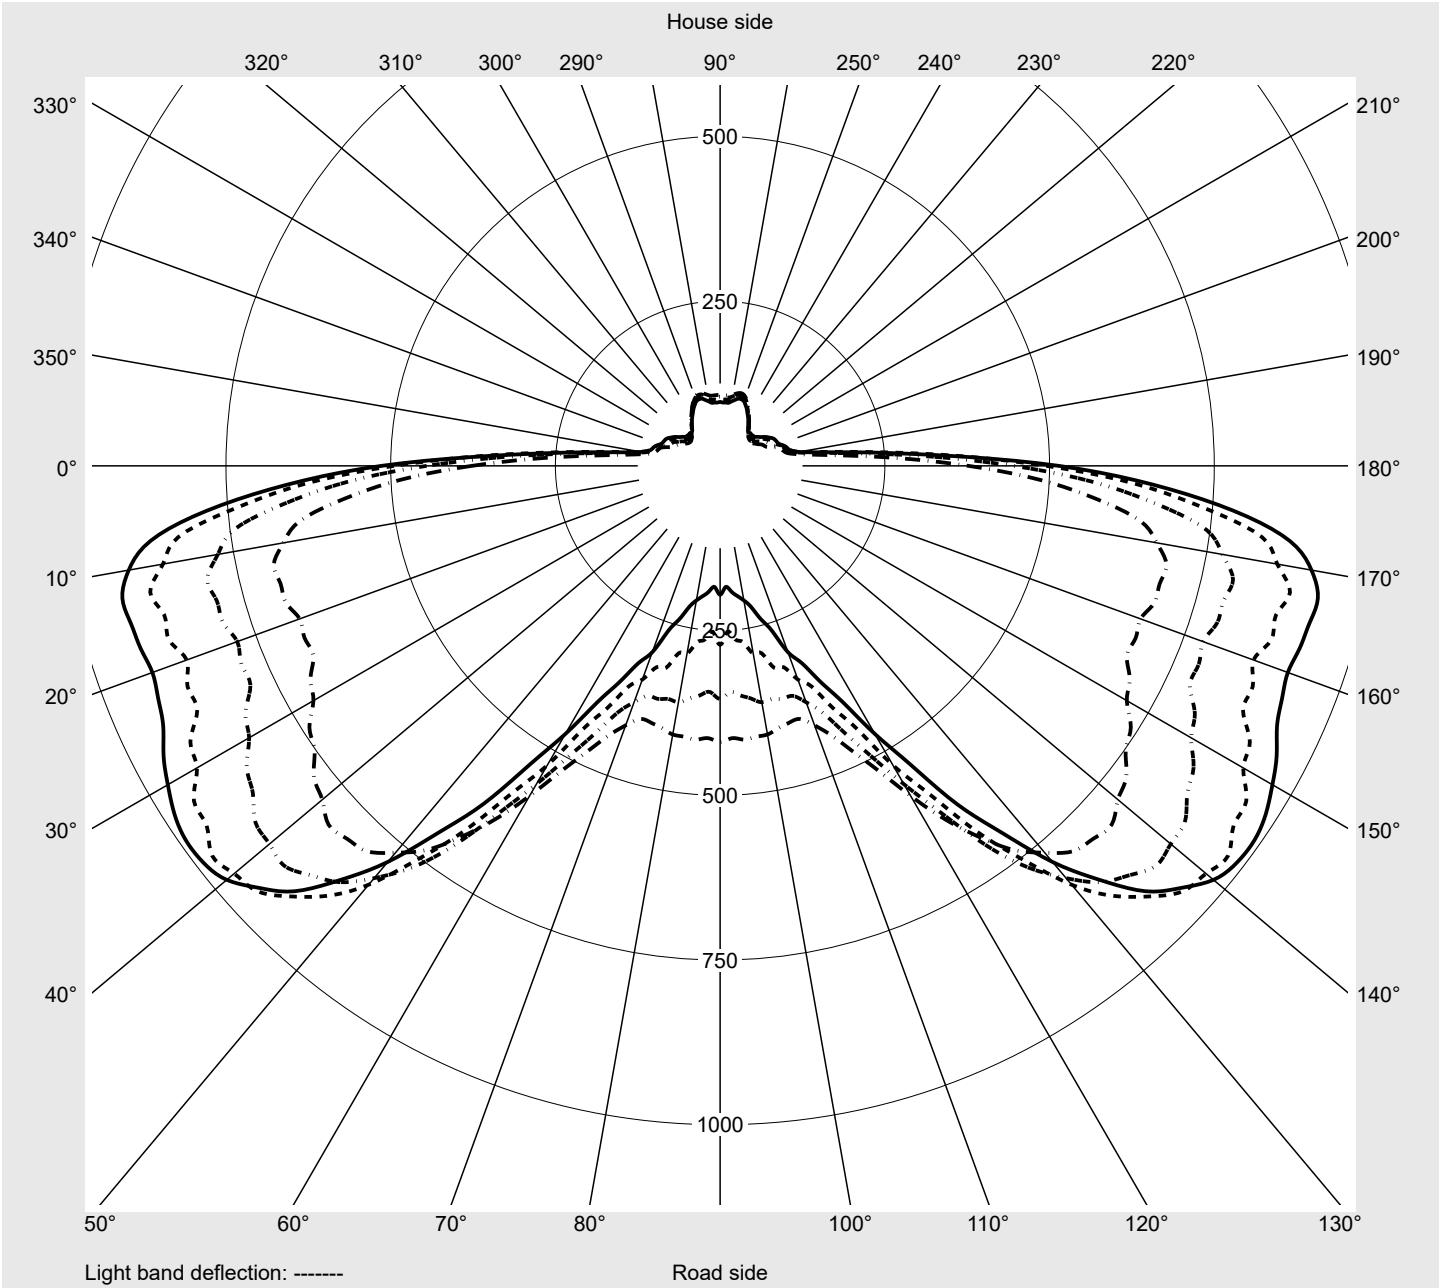

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	230.8	232.1	233.5	235.0	236.4	238.0	239.2	240.8	242.2	243.7	244.7	246.0	247.0	248.4	249.3
5,0°	229.3	232.1	235.0	237.8	240.5	243.5	246.0	248.8	251.2	253.8	255.7	258.0	259.7	261.9	263.5
7,5°	227.0	231.2	235.4	239.5	243.3	247.2	250.8	254.3	257.4	260.6	263.2	265.8	268.0	270.2	272.1
10,0°	224.1	229.7	235.1	240.2	244.8	249.6	253.9	257.8	261.5	264.7	267.4	269.7	272.0	273.9	275.3
12,5°	220.8	227.4	233.9	239.8	245.2	250.5	255.1	259.2	262.7	265.7	268.2	270.0	271.5	272.2	272.9
15,0°	216.3	223.7	231.1	237.8	243.7	249.2	254.1	258.2	261.5	263.8	265.7	266.4	266.8	266.1	265.4
17,5°	211.1	219.7	227.9	235.1	241.3	247.0	251.9	255.6	258.4	259.9	260.5	260.0	258.9	256.8	254.3
20,0°	206.0	215.3	224.3	232.1	238.6	244.3	249.2	252.2	254.3	254.4	254.0	251.4	249.2	244.8	241.1
22,5°	200.8	211.2	221.0	229.4	236.2	241.9	246.2	248.6	249.4	248.2	246.1	242.2	237.9	232.5	227.1
25,0°	195.8	207.2	218.1	226.9	234.0	239.6	243.3	244.7	244.4	241.7	238.3	232.4	227.1	220.2	214.2
27,5°	190.9	203.6	215.3	225.0	232.4	237.9	240.9	241.5	239.8	235.9	230.6	223.8	216.8	209.7	203.2
30,0°	186.8	200.6	213.2	223.7	231.5	237.0	239.4	238.8	235.9	230.4	223.9	216.1	208.4	201.0	194.9
32,5°	182.5	197.3	211.0	222.2	230.5	235.8	237.5	236.0	232.1	225.4	217.9	209.1	201.4	194.1	188.7
35,0°	177.6	193.9	208.6	220.8	229.5	234.6	235.6	233.2	228.2	220.8	212.4	203.4	195.6	189.1	184.4
37,5°	173.5	191.2	207.1	220.1	228.6	233.4	234.1	231.1	225.0	216.7	207.7	198.7	191.0	185.4	182.5
40,0°	169.1	188.4	205.3	218.3	227.6	232.7	233.2	229.4	222.7	214.0	204.7	196.0	189.0	185.2	184.7
42,5°	164.0	184.7	202.5	217.7	227.6	233.1	233.4	229.1	221.7	212.6	203.4	195.4	190.3	189.1	192.0
45,0°	159.1	180.8	200.1	216.8	227.3	232.5	231.9	226.5	218.1	208.1	198.9	191.2	187.9	188.7	194.7
46,0°	157.8	179.9	200.1	217.5	228.1	233.2	232.3	226.3	217.0	206.6	197.0	189.7	186.7	188.6	195.5
47,0°	156.7	179.5	200.9	218.9	230.0	235.2	233.9	227.5	217.7	206.9	197.3	190.6	188.6	192.0	200.3
48,0°	156.1	179.8	202.1	221.0	232.4	237.9	236.5	229.8	219.7	209.2	199.4	193.6	192.4	197.4	207.1
49,0°	155.6	180.5	204.0	224.2	235.9	242.0	239.9	233.7	223.2	212.9	202.9	198.6	198.0	205.1	215.2
50,0°	155.4	181.5	206.6	227.9	240.4	246.6	244.9	238.4	227.9	217.4	208.6	204.7	205.9	213.5	225.4
51,0°	155.6	183.4	210.0	232.5	245.5	252.1	250.6	244.1	233.8	223.6	215.5	212.7	215.0	223.6	236.0
52,0°	156.5	186.4	214.6	238.5	252.7	259.8	258.3	251.4	241.1	231.7	224.6	222.9	226.3	235.7	248.7
53,0°	158.2	190.2	220.0	245.5	260.8	268.3	266.7	259.9	249.5	240.4	233.8	233.0	237.2	247.0	259.7
54,0°	160.8	195.0	227.2	254.3	270.6	278.7	276.8	269.9	259.3	250.3	244.2	244.0	248.1	257.9	270.2
55,0°	165.0	202.0	236.7	266.3	283.7	292.2	290.2	283.0	272.0	262.5	256.4	256.1	260.8	270.5	281.8
56,0°	170.4	210.7	248.2	280.4	298.7	307.9	305.3	298.2	286.1	276.2	269.4	269.7	273.9	283.6	294.0
57,0°	177.7	223.0	262.3	299.8	316.8	329.5	324.0	318.7	302.6	295.2	285.9	289.1	290.8	303.2	311.4
58,0°	188.5	238.1	282.9	322.2	342.1	354.2	349.7	342.4	327.5	318.8	311.1	314.1	318.0	331.0	340.5
59,0°	202.8	259.2	308.4	353.4	373.8	388.0	382.3	376.1	359.5	353.2	345.2	351.7	355.6	371.7	381.9
60,0°	226.7	292.6	348.5	400.9	422.6	439.3	432.7	428.0	410.5	408.2	401.1	412.1	417.2	437.5	446.9
61,0°	258.9	337.3	402.8	461.1	485.1	504.4	496.9	495.0	478.9	479.9	474.0	489.2	495.1	517.8	526.5
62,0°	305.9	397.9	474.0	538.2	566.1	585.7	580.0	579.3	566.8	569.4	566.9	583.1	592.2	615.2	626.6
63,0°	376.8	485.7	572.4	643.8	673.0	693.9	690.7	691.1	679.0	682.7	681.2	701.0	712.7	739.1	751.5
64,0°	445.5	568.1	665.1	744.5	774.1	797.4	790.9	791.3	779.9	786.4	786.6	812.3	825.4	852.0	865.8
65,0°	495.0	632.1	738.6	829.7	858.7	886.0	873.6	877.2	861.5	875.0	875.6	906.4	916.8	946.9	951.5
66,0°	513.8	658.5	782.3	871.9	911.4	929.3	925.7	922.2	917.0	923.1	932.7	952.3	967.9	982.2	990.2
67,0°	508.5	661.1	795.9	889.2	934.5	951.1	947.5	940.1	933.8	932.2	938.8	945.2	958.1	960.7	964.9
68,0°	466.0	617.4	764.5	863.0	925.7	939.0	938.7	922.0	913.7	896.4	897.6	890.7	899.1	886.6	886.2
69,0°	371.7	497.6	641.9	733.7	818.0	835.7	853.6	833.8	831.3	805.0	808.8	792.2	799.4	776.0	771.5
70,0°	249.4	329.2	462.6	512.5	616.1	619.2	684.6	658.9	685.4	649.9	668.6	640.4	659.0	623.9	631.0
71,0°	120.6	165.3	231.1	264.3	329.8	356.3	414.7	435.7	481.5	475.9	492.1	480.1	491.4	471.4	468.5
72,0°	57.4	71.1	94.1	106.4	137.1	155.7	195.8	224.8	285.6	304.7	329.0	324.3	338.2	325.6	326.9

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	250.6	251.2	252.4	253.0	254.3	254.8	255.7	256.1	257.0	257.4	258.3	258.7	259.6	259.8	260.5
5,0°	265.5	266.7	268.4	269.4	271.0	271.9	273.4	273.9	275.2	275.7	277.0	277.3	278.4	278.6	279.4
7,5°	273.9	275.4	276.8	277.9	279.1	280.0	280.8	281.5	282.1	282.5	283.0	283.5	283.7	284.0	284.2
10,0°	276.5	277.5	278.1	278.5	278.5	278.7	278.5	278.5	277.9	277.8	277.1	277.1	276.5	276.5	275.8
12,5°	272.7	272.7	271.5	271.0	269.2	268.5	266.3	265.5	262.9	262.2	259.5	259.0	256.6	256.4	254.1
15,0°	263.6	262.1	259.2	257.0	253.5	250.9	247.5	245.1	241.5	239.2	235.9	234.3	231.3	230.0	227.6
17,5°	250.9	247.5	243.2	239.5	235.1	231.3	227.1	223.6	219.8	216.9	213.7	211.6	209.1	207.4	205.7
20,0°	235.6	231.8	225.5	221.6	215.9	212.5	207.7	205.2	201.3	199.5	196.7	195.5	193.5	193.1	191.7
22,5°	221.1	215.7	209.8	205.4	200.9	197.8	194.8	192.9	191.1	190.2	189.4	189.2	189.2	189.4	189.8
25,0°	207.5	202.8	197.5	194.4	191.1	189.7	188.6	188.6	189.4	190.0	191.6	192.5	194.4	195.2	197.3
27,5°	197.7	193.5	190.0	188.3	187.7	188.4	190.0	192.4	195.5	198.5	201.5	203.9	206.2	207.7	209.5
30,0°	190.2	187.3	185.7	186.1	188.0	191.3	195.8	200.9	206.5	211.1	215.5	217.9	220.1	221.0	222.6
32,5°	185.1	183.8	184.2	186.7	191.2	197.3	204.6	211.8	219.6	225.3	230.7	233.3	235.9	236.5	238.9
35,0°	182.5	182.9	185.7	190.5	197.4	205.9	215.5	224.8	234.4	242.3	249.2	253.7	257.2	259.8	263.6
37,5°	182.7	185.8	191.6	199.1	209.1	220.7	233.2	245.6	258.3	268.5	277.7	283.9	289.9	294.3	299.7
40,0°	187.9	194.3	203.9	215.0	229.1	243.5	259.2	274.0	289.7	301.3	312.2	318.8	325.4	328.9	334.1
42,5°	199.3	210.1	224.3	239.2	256.1	273.1	289.7	304.7	319.3	330.8	340.2	346.9	351.7	354.8	358.5
45,0°	204.5	217.9	233.2	249.0	265.0	280.5	294.0	306.4	317.4	327.0	334.8	340.6	344.7	348.4	352.6
46,0°	206.5	220.9	237.3	253.7	269.6	284.3	296.6	307.8	317.5	325.9	333.1	338.9	343.3	347.8	353.1
47,0°	212.7	228.1	245.0	261.0	276.5	289.8	301.0	310.7	319.2	326.6	334.2	340.8	346.4	352.1	358.9
48,0°	220.9	236.3	253.2	268.7	283.5	295.6	305.5	313.6	321.4	328.4	336.6	344.1	351.5	358.4	366.8
49,0°	230.7	245.4	262.5	276.7	290.9	301.0	310.1	316.8	324.1	330.9	339.9	348.5	358.2	365.9	376.3
50,0°	240.7	256.0	271.5	285.4	297.9	307.1	314.6	320.4	327.1	334.5	344.0	354.1	364.5	374.0	385.5
51,0°	251.4	266.4	281.1	293.5	304.7	312.7	318.9	324.1	330.5	338.5	348.6	359.7	371.7	383.2	397.5
52,0°	263.7	277.7	290.8	301.8	311.4	318.2	323.3	328.0	334.7	343.1	354.5	367.8	383.9	399.7	418.6
53,0°	273.9	286.9	298.6	308.1	316.2	322.1	326.7	331.5	338.9	349.1	364.7	382.0	402.7	421.5	442.5
54,0°	283.5	295.3	306.0	314.2	320.6	325.7	330.5	336.3	347.4	362.2	382.9	403.3	427.0	448.0	468.4
55,0°	293.9	304.3	313.9	320.8	327.0	332.2	339.4	350.0	367.8	386.9	411.5	433.6	455.3	472.0	486.9
56,0°	305.8	315.2	324.4	330.5	338.2	345.8	359.1	374.9	398.3	418.2	442.5	458.6	472.7	484.1	495.5
57,0°	326.3	332.2	344.5	348.0	361.4	371.7	397.0	411.3	439.6	451.4	468.8	475.4	484.0	490.3	499.6
58,0°	355.1	362.7	375.0	381.7	400.5	418.3	444.6	461.3	478.0	482.6	488.9	489.6	490.8	493.8	501.5
59,0°	399.4	405.6	421.8	431.9	458.5	477.3	502.4	507.9	514.5	509.9	507.2	500.1	495.8	495.0	499.9
60,0°	466.4	472.7	495.5	509.7	542.1	553.6	566.0	559.6	554.3	538.4	524.6	508.9	496.8	490.4	488.2
61,0°	548.8	556.9	585.1	600.9	627.0	625.8	625.2	606.8	588.1	560.5	536.1	511.6	489.7	475.0	464.7
62,0°	648.8	661.9	690.0	699.6	708.4	696.2	680.6	650.3	616.5	577.3	539.0	501.5	470.3	452.2	441.2
63,0°	776.9	788.2	806.0	800.6	793.3	766.4	735.4	688.6	636.5	578.4	522.3	479.1	443.2	419.1	402.8
64,0°	888.9	892.8	897.9	878.6	856.9	816.8	768.4	702.3	624.6	557.9	497.0	447.2	404.8	381.9	366.0
65,0°	971.8	962.7	954.7	924.1	885.4	829.8	752.1	676.0	590.1	524.8	450.2	405.9	362.2	345.2	320.4
66,0°	988.9	977.5	948.3	913.1	852.2	784.8	701.4	626.6	537.4	470.0	405.4	362.7	324.0	301.0	263.1
67,0°	949.7	932.5	888.7	849.7	775.5	711.3	627.4	556.9	475.6	420.4	360.1	318.1	277.7	257.2	212.6
68,0°	855.2	831.2	772.5	730.8	655.3	598.9	524.2	472.3	406.6	355.2	298.2	265.8	236.2	218.4	168.6
69,0°	731.2	703.7	643.1	604.5	535.5	491.5	437.0	393.4	330.4	293.0	253.4	228.5	201.7	185.0	134.8
70,0°	577.9	565.0	499.2	476.7	415.0	393.7	332.9	307.3	263.9	243.4	207.5	190.7	164.7	152.0	105.1
71,0°	434.8	414.3	373.8	351.6	310.3	282.6	253.4	237.7	210.9	192.0	167.9	152.1	133.3	121.0	84.2
72,0°	303.8	292.7	265.7	246.0	214.4	207.7	189.9	180.5	162.0	149.7	132.0	120.1	105.5	96.4	69.2

Photometric test report

Family	Order number: 5XH7H4AA08MA	LP number
Streetlight 31 midi toolless	EAN: 4069025096487	59066_1383

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	260.4	260.9	260.8	261.4	261.2	261.6	261.3	229.1	227.6	225.9	224.4	222.7	221.6	219.9	218.8
5,0°	279.4	280.0	280.0	280.6	280.5	281.0	280.5	225.9	222.7	219.1	216.1	212.4	209.6	205.9	203.2
7,5°	284.2	284.2	284.5	284.5	284.7	284.7	284.9	221.9	216.9	211.7	206.8	201.5	196.9	191.7	187.1
10,0°	275.8	275.1	275.4	274.9	275.4	274.9	275.3	217.6	211.1	204.2	197.7	190.9	184.8	178.2	172.3
12,5°	254.3	252.3	253.2	251.7	253.1	251.8	253.1	212.7	204.8	196.5	188.9	180.5	173.5	165.6	159.3
15,0°	227.1	225.2	225.0	223.7	224.2	223.3	224.0	206.7	197.4	188.0	179.0	169.8	162.0	153.9	147.0
17,5°	204.7	203.5	203.0	202.2	202.2	201.8	202.0	200.6	190.0	179.6	169.5	159.8	151.4	143.4	136.9
20,0°	191.7	191.0	191.2	190.6	191.0	190.7	191.1	193.9	182.7	170.6	160.5	149.8	141.9	134.0	128.7
22,5°	190.2	191.0	191.7	192.5	193.0	193.5	193.6	187.7	175.0	162.5	151.4	141.0	133.0	126.4	121.7
25,0°	198.2	200.7	201.9	204.3	204.9	206.9	206.2	181.4	167.9	154.6	143.4	133.2	126.1	120.0	116.6
27,5°	211.3	214.1	217.1	219.8	221.7	222.7	222.7	175.7	161.0	147.6	136.1	126.7	120.0	115.4	112.9
30,0°	224.3	227.9	232.0	235.6	236.6	235.9	235.1	170.3	154.9	141.0	129.6	120.7	114.9	111.3	109.6
32,5°	240.8	246.6	251.4	255.8	254.7	253.5	252.0	164.7	148.5	134.3	123.3	115.0	110.3	107.5	106.2
35,0°	268.7	276.4	281.5	283.5	282.0	281.5	281.2	158.8	141.7	127.7	117.1	110.0	106.1	104.1	103.1
37,5°	304.7	311.0	314.1	315.7	315.8	317.2	317.5	153.0	135.2	121.2	111.2	105.0	102.3	100.8	100.0
40,0°	337.5	343.5	346.4	349.2	349.3	351.9	352.2	147.2	128.9	114.9	105.8	100.6	98.7	97.6	97.0
42,5°	362.4	367.0	370.2	372.4	373.5	375.5	376.2	140.9	122.3	108.9	100.8	96.8	95.4	94.4	93.6
45,0°	358.7	364.3	369.8	373.7	376.8	380.1	381.0	135.0	115.9	103.1	96.1	93.3	92.2	91.3	90.5
46,0°	360.7	368.3	375.1	380.1	383.5	387.2	388.4	133.0	113.9	101.2	94.6	92.0	91.1	90.0	89.3
47,0°	367.5	377.2	385.0	391.0	395.0	399.0	400.4	131.3	111.8	99.2	93.1	90.7	89.6	88.7	88.0
48,0°	375.6	387.1	395.5	402.4	406.0	410.7	411.8	129.8	110.0	97.6	91.9	89.5	88.6	87.5	86.9
49,0°	384.8	397.9	406.2	414.8	418.0	424.4	424.5	128.3	108.4	96.0	90.6	88.2	87.5	86.4	85.7
50,0°	396.0	410.0	420.8	430.9	436.2	442.8	443.7	127.4	106.8	94.6	89.3	87.2	86.4	85.4	84.6
51,0°	411.8	428.8	442.2	454.1	461.0	467.8	469.2	126.7	105.6	93.4	88.2	86.2	85.4	84.4	83.6
52,0°	435.8	454.7	468.9	482.4	489.8	498.2	499.3	126.4	104.5	92.2	87.3	85.4	84.6	83.6	82.4
53,0°	461.4	482.3	496.6	509.6	517.3	524.9	526.7	126.5	103.7	91.4	86.4	84.7	83.7	83.0	81.2
54,0°	486.3	504.2	516.5	527.8	535.2	541.5	543.7	127.4	103.5	90.7	85.9	84.1	83.1	82.4	79.9
55,0°	502.0	517.7	528.8	538.1	545.5	551.4	553.9	128.9	103.6	90.2	85.3	83.5	82.5	81.7	78.4
56,0°	509.0	524.3	535.7	545.5	553.6	559.9	562.2	131.6	104.4	90.1	85.0	83.0	82.2	81.4	76.7
57,0°	513.0	530.3	542.0	552.3	560.1	566.9	568.6	135.6	106.0	90.7	85.1	83.0	82.1	81.0	75.1
58,0°	516.1	532.7	545.9	556.0	564.9	570.9	573.3	141.7	109.0	92.0	85.5	83.4	82.3	81.1	73.4
59,0°	513.9	528.3	541.3	549.1	558.4	562.3	566.7	150.7	113.6	94.1	86.6	84.0	82.9	81.4	72.4
60,0°	498.1	506.1	517.8	523.8	534.2	538.2	543.3	166.2	121.4	98.4	88.8	85.7	84.6	82.5	72.4
61,0°	471.3	480.1	492.8	500.0	510.2	512.5	518.2	187.6	133.2	104.9	92.4	88.3	86.8	84.4	73.8
62,0°	444.4	449.1	458.1	462.5	469.4	469.7	475.2	219.1	151.6	114.8	98.2	92.8	90.7	87.5	77.2
63,0°	403.7	407.6	414.0	414.7	417.1	413.7	419.1	270.0	182.5	132.1	107.6	99.9	96.7	92.7	82.9
64,0°	366.1	362.5	364.3	356.0	349.6	343.7	353.8	321.3	216.4	151.0	117.3	106.4	102.2	97.8	88.9
65,0°	317.4	291.4	289.3	270.1	264.4	252.1	271.8	355.7	238.4	162.6	123.2	109.7	105.4	101.0	93.7
66,0°	241.7	220.2	207.4	199.1	191.1	184.2	195.6	348.6	231.5	157.6	121.4	108.9	105.4	101.7	96.3
67,0°	175.0	157.4	148.3	141.7	137.2	131.1	138.8	316.8	193.3	134.1	110.9	102.8	101.1	98.3	95.2
68,0°	117.8	104.2	99.6	95.9	93.4	89.4	95.1	258.3	142.7	99.1	89.6	86.6	89.3	87.2	87.0
69,0°	82.1	70.5	67.8	64.9	63.7	62.0	65.3	185.3	97.0	71.2	68.1	67.2	71.2	71.7	73.1
70,0°	58.7	49.5	49.0	46.5	46.8	44.7	48.0	111.0	62.7	49.7	50.0	48.0	52.3	52.4	56.6
71,0°	45.2	40.1	39.7	39.0	38.8	38.4	38.6	60.9	42.5	38.9	38.8	38.7	39.9	40.3	42.3
72,0°	40.2	36.8	36.7	35.7	35.4	34.9	35.2	39.6	35.4	33.9	34.1	34.4	35.0	34.9	35.7

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	216.9	215.6	213.9	212.7	211.1	210.0	208.2	207.3	205.6	204.8	203.2	202.6	201.1	200.6	199.2
5,0°	199.3	196.5	192.8	190.4	186.8	184.7	181.1	179.2	176.0	174.3	171.1	169.9	167.1	165.9	163.4
7,5°	182.0	177.4	172.5	168.6	164.1	160.5	156.4	153.4	149.9	147.3	144.2	142.3	139.5	138.1	135.8
10,0°	165.9	160.5	154.8	150.1	145.3	141.4	137.3	134.5	131.1	128.9	126.3	124.6	122.8	121.6	120.0
12,5°	152.1	146.7	140.8	136.6	132.2	129.1	125.7	123.6	121.2	119.7	118.1	117.3	116.2	115.7	114.9
15,0°	140.4	135.2	130.6	127.1	123.8	121.6	119.7	118.5	117.5	116.7	115.8	114.9	114.1	113.3	112.5
17,5°	131.4	127.0	123.6	121.2	119.5	118.4	117.4	116.6	115.6	114.7	113.6	112.7	111.7	110.7	109.8
20,0°	123.7	120.9	118.4	117.4	116.5	115.8	114.7	113.9	112.8	112.1	110.9	110.2	109.2	108.4	107.5
22,5°	118.1	116.4	115.2	114.3	113.3	112.5	111.6	110.8	110.0	109.3	108.4	107.8	107.1	106.5	105.8
25,0°	114.4	113.2	112.0	111.3	110.1	109.4	108.6	108.0	107.1	106.8	106.2	105.8	105.2	104.9	104.2
27,5°	111.3	110.3	109.3	108.3	107.4	106.5	105.9	105.2	104.1	103.2	102.2	101.1	99.8	97.6	93.5
30,0°	108.2	107.5	106.3	105.5	104.8	104.2	102.6	99.3	96.3	94.4	92.4	90.9	88.8	87.0	86.2
32,5°	105.1	104.4	103.5	102.8	101.7	99.5	92.6	88.5	86.7	86.2	85.5	85.3	85.1	85.3	85.3
35,0°	102.2	101.2	99.9	98.0	95.0	88.5	84.3	84.0	83.7	83.7	83.8	84.0	84.1	83.8	83.3
37,5°	99.1	96.1	91.9	88.5	84.8	82.2	81.9	82.0	82.1	82.2	82.2	81.9	81.5	81.2	80.9
40,0°	95.6	87.2	82.1	80.5	79.7	79.7	79.8	80.2	80.3	80.1	79.7	79.5	79.1	78.9	78.5
42,5°	90.5	79.2	77.1	77.0	76.9	77.3	77.6	77.8	77.7	77.7	77.5	77.5	77.3	77.2	77.1
45,0°	85.6	74.9	74.0	74.0	74.3	74.7	75.0	75.3	75.4	75.7	75.9	76.0	76.0	76.0	76.2
46,0°	83.7	73.6	72.8	73.0	73.3	73.7	73.9	74.4	74.6	75.0	75.3	75.6	75.7	75.7	76.0
47,0°	81.8	72.1	71.7	71.9	72.1	72.5	72.8	73.3	73.7	74.3	74.6	75.0	75.2	75.6	75.8
48,0°	79.9	70.8	70.5	70.8	71.0	71.4	71.9	72.4	73.0	73.6	74.1	74.6	75.0	75.3	75.9
49,0°	77.8	69.7	69.4	69.8	69.8	70.5	70.7	71.4	72.0	72.8	73.4	74.1	74.7	75.3	75.9
50,0°	75.8	68.2	68.2	68.6	68.6	69.3	69.5	70.4	71.1	71.9	72.7	73.6	74.4	75.1	75.9
51,0°	73.8	66.9	67.1	67.4	67.5	68.1	68.6	69.4	70.2	71.2	72.1	73.1	73.9	75.0	76.0
52,0°	71.7	65.6	65.9	66.2	66.3	66.8	67.5	68.4	69.2	70.2	71.3	72.5	73.7	74.7	76.2
53,0°	69.7	64.5	64.7	65.0	65.2	65.8	66.5	67.4	68.4	69.5	70.6	71.9	73.4	74.7	76.4
54,0°	67.8	63.4	63.5	63.7	64.0	64.7	65.5	66.5	67.5	68.7	70.0	71.4	73.2	74.9	76.9
55,0°	65.8	62.1	62.2	62.4	62.7	63.5	64.2	65.3	66.5	67.8	69.2	71.0	73.0	75.0	77.3
56,0°	63.9	60.9	60.9	61.1	61.5	62.3	63.1	64.3	65.5	67.1	68.6	70.5	72.8	75.3	78.2
57,0°	62.0	59.8	59.6	60.0	60.3	61.3	61.8	63.3	64.3	66.1	67.9	70.1	72.6	75.4	78.9
58,0°	60.8	58.8	58.5	58.7	59.1	60.0	60.8	62.1	63.5	65.3	67.3	69.8	72.5	75.9	79.7
59,0°	60.1	58.3	57.8	57.6	57.9	58.7	59.6	61.0	62.6	64.3	66.6	69.3	72.5	76.2	80.4
60,0°	60.7	58.9	57.8	57.1	57.1	57.6	58.4	59.8	61.4	63.5	65.9	68.9	72.4	76.5	81.2
61,0°	63.4	61.1	59.5	57.7	57.0	57.0	57.5	58.7	60.3	62.6	65.3	68.5	72.3	76.6	81.6
62,0°	68.4	65.8	63.3	60.3	58.5	57.2	57.1	57.9	59.5	61.7	64.6	68.0	72.0	76.6	81.8
63,0°	75.8	73.2	70.4	65.9	62.8	59.6	58.3	57.8	59.0	60.9	63.7	67.5	71.7	76.5	82.0
64,0°	83.7	81.1	78.3	73.2	69.2	64.2	61.4	59.5	59.7	60.9	63.3	66.8	71.2	76.2	81.5
65,0°	90.3	88.1	86.0	80.4	76.5	70.1	66.8	63.0	62.7	62.6	64.2	66.3	70.5	75.6	80.8
66,0°	93.8	92.5	90.3	86.0	81.7	76.2	72.3	68.6	67.8	67.2	67.5	66.8	69.7	74.5	79.6
67,0°	93.7	93.4	91.5	88.1	84.0	79.2	76.0	73.6	73.6	73.8	73.9	69.4	69.4	73.2	78.0
68,0°	86.4	88.2	87.5	86.2	82.7	79.6	77.3	76.9	79.8	82.3	83.4	75.7	70.4	71.5	75.7
69,0°	73.6	76.6	77.2	78.6	76.4	75.6	74.9	77.8	84.4	89.9	91.4	82.7	73.1	70.4	73.0
70,0°	56.5	61.7	62.4	66.5	65.0	67.1	67.6	74.9	85.5	94.5	94.6	86.4	76.3	69.7	69.5
71,0°	43.3	46.4	48.7	52.5	53.6	55.7	57.8	66.7	80.5	91.6	90.7	83.8	75.0	68.7	65.8
72,0°	36.3	38.0	39.6	42.3	43.9	45.8	47.4	55.3	68.1	79.7	80.4	76.2	69.1	64.5	61.1

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	0.3	0.3
2,5°	199.0	197.7	197.6	196.3	196.2	195.2	195.4	194.4	194.6	193.9	194.4	193.7	194.2	2.7	3.1
5,0°	162.6	160.2	159.8	157.6	157.4	155.7	155.7	154.3	154.3	153.4	153.9	152.8	153.7	5.3	8.4
7,5°	134.6	132.8	132.0	130.5	129.8	128.7	128.4	127.4	127.4	126.7	126.8	126.3	126.5	7.7	16.1
10,0°	119.2	118.1	117.7	116.8	116.6	116.1	115.9	115.7	115.5	115.3	115.3	115.2	115.4	9.8	25.9
12,5°	114.6	113.9	113.6	113.1	112.9	112.4	112.3	111.9	111.9	111.6	111.7	111.5	111.6	11.7	37.6
15,0°	111.8	110.9	110.3	109.5	109.3	108.7	108.4	107.9	107.7	107.5	107.4	107.3	107.4	13.3	50.9
17,5°	108.9	108.0	107.3	106.5	106.0	105.5	105.1	104.7	104.5	104.3	104.2	103.9	103.9	14.7	65.6
20,0°	106.8	105.8	105.1	104.4	103.9	103.4	103.1	102.6	102.5	102.2	102.1	101.9	101.9	16.0	81.5
22,5°	105.1	104.5	103.9	103.0	102.1	101.3	100.9	100.6	100.7	100.6	100.8	100.6	100.8	17.3	98.8
25,0°	103.1	99.7	96.7	92.5	91.6	90.1	90.5	89.5	90.2	89.3	90.1	89.2	90.1	18.6	117.5
27,5°	89.9	87.4	86.2	85.4	84.8	84.3	83.8	83.5	83.3	83.0	82.8	82.8	82.8	20.1	137.6
30,0°	85.9	85.5	85.4	84.9	84.6	84.1	83.5	83.0	82.5	82.2	81.8	81.6	81.6	21.7	159.3
32,5°	85.2	84.7	84.1	83.3	82.5	81.8	81.3	80.5	80.3	79.8	79.7	79.4	79.4	23.4	182.7
35,0°	82.8	82.3	81.8	81.1	80.4	79.6	79.0	78.4	77.9	77.6	77.2	77.0	76.9	25.4	208.1
37,5°	80.6	80.0	79.6	79.1	78.6	78.0	77.6	77.0	76.7	76.2	75.9	75.6	75.4	27.8	235.9
40,0°	78.4	78.3	78.0	77.6	77.3	77.1	76.9	76.5	76.0	75.6	75.2	74.7	74.7	30.5	266.3
42,5°	77.0	76.9	76.9	76.8	76.9	76.9	76.9	76.8	76.4	75.9	75.3	74.7	74.6	33.2	299.5
45,0°	76.4	76.6	76.9	77.1	77.3	77.6	77.8	77.9	77.7	77.1	76.6	75.9	75.7	24.0	323.5
46,0°	76.4	76.7	77.1	77.3	77.8	78.0	78.5	78.6	78.5	78.0	77.6	77.0	76.9	14.1	337.5
47,0°	76.4	76.9	77.5	78.0	78.5	79.0	79.5	79.8	79.8	79.5	79.0	78.5	78.3	14.5	352.0
48,0°	76.4	77.1	77.8	78.6	79.5	80.2	80.8	81.0	81.1	81.0	80.5	80.3	80.2	14.9	366.9
49,0°	76.6	77.5	78.4	79.6	80.5	81.7	82.3	83.0	82.9	83.0	82.5	82.5	82.1	15.4	382.3
50,0°	76.9	77.9	79.2	80.7	82.1	83.6	84.7	85.4	85.4	85.4	85.1	85.1	84.9	15.9	398.2
51,0°	77.2	78.5	80.2	82.1	84.0	85.9	87.2	88.1	88.2	88.2	88.0	88.2	88.0	16.6	414.7
52,0°	77.7	79.5	81.7	84.2	86.6	89.0	90.7	91.8	91.6	91.6	91.6	91.9	91.8	17.3	432.1
53,0°	78.4	80.7	83.4	86.3	89.3	92.2	94.3	95.2	95.1	95.1	95.2	95.6	95.6	18.1	450.2
54,0°	79.2	82.0	85.3	88.9	92.6	95.9	97.9	98.7	98.5	98.5	98.7	99.2	99.1	18.9	469.1
55,0°	80.2	83.7	87.6	92.1	96.3	100.0	102.2	102.6	102.2	102.1	102.3	102.9	102.9	19.8	488.9
56,0°	81.4	85.3	89.9	95.2	99.8	103.9	105.8	106.2	105.2	105.1	105.4	106.1	106.2	20.7	509.7
57,0°	82.7	87.2	92.2	98.3	103.1	107.7	109.2	109.4	108.0	107.7	107.9	108.7	108.6	21.8	531.5
58,0°	84.0	88.8	94.7	101.0	106.3	110.7	112.2	111.9	110.3	109.6	109.7	110.5	110.7	23.1	554.6
59,0°	85.1	90.5	96.6	103.4	108.9	113.2	114.5	113.8	111.8	110.8	110.9	111.6	111.9	24.7	579.3
60,0°	86.2	91.9	98.4	105.2	110.9	115.1	116.0	114.8	112.6	111.3	111.3	112.0	112.1	26.6	605.9
61,0°	86.9	92.7	99.5	106.2	112.1	115.8	116.5	114.8	112.3	110.9	110.9	111.4	111.6	28.9	634.8
62,0°	87.4	93.4	99.9	106.7	112.3	115.7	116.0	114.1	111.3	109.5	109.6	110.1	110.2	31.5	666.3
63,0°	87.5	93.4	99.9	106.2	111.5	114.5	114.5	112.2	109.4	107.4	107.4	107.6	107.9	34.6	700.8
64,0°	87.0	93.0	99.2	105.1	110.1	112.5	112.2	109.7	106.8	104.7	104.5	104.8	105.0	37.2	738.0
65,0°	86.3	91.8	97.8	103.0	107.9	109.4	109.3	106.2	103.5	100.9	101.1	100.9	101.7	38.6	776.6
66,0°	84.9	89.9	95.6	100.4	104.7	106.0	105.5	102.3	99.3	96.5	96.5	96.1	97.0	38.4	815.0
67,0°	82.9	87.5	92.7	97.1	101.1	101.6	100.6	96.3	92.6	88.2	87.9	86.7	87.7	36.9	852.0
68,0°	80.3	84.3	88.9	92.2	94.8	93.1	90.9	86.7	84.1	80.5	80.2	79.6	80.2	33.8	885.8
69,0°	77.1	80.4	83.8	84.6	86.9	85.4	84.3	80.8	77.6	74.7	74.5	73.7	74.3	29.4	915.2
70,0°	73.1	74.4	77.1	78.2	79.8	78.6	77.5	71.9	69.9	65.3	65.4	63.4	64.6	23.5	938.6
71,0°	67.4	68.7	70.6	71.4	71.9	69.3	67.3	63.6	61.4	57.9	57.4	57.0	57.5	17.0	955.6
72,0°	61.8	62.6	63.5	63.4	63.5	62.4	60.1	57.0	54.0	50.6	50.0	49.2	50.1	11.7	967.4

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	35.2	38.4	44.0	47.9	56.3	63.4	78.3	94.3	136.6	163.2	187.0	188.9	200.9	197.3	202.2
74,0°	29.0	30.2	32.5	33.7	36.7	38.2	42.7	47.1	67.2	83.1	102.3	104.2	116.8	114.8	121.0
75,0°	25.0	25.4	26.8	27.6	29.1	29.4	31.0	31.7	38.9	45.5	55.5	56.9	63.5	63.0	66.6
76,0°	21.4	21.6	22.5	22.8	23.9	24.0	25.1	25.1	27.1	28.9	31.9	32.2	35.2	35.1	36.0
77,0°	18.6	18.6	19.3	19.2	20.1	20.2	20.9	21.1	22.2	22.6	24.0	24.1	25.4	25.3	25.9
78,0°	16.2	15.8	16.3	15.8	16.8	16.7	17.5	17.4	18.4	18.6	19.7	19.5	20.5	20.2	21.4
79,0°	13.6	13.4	13.5	13.1	13.6	13.7	14.3	14.4	15.1	15.3	16.1	16.2	16.7	16.8	17.5
80,0°	11.4	10.9	11.0	10.6	11.0	11.1	11.6	11.7	12.3	12.5	13.2	13.2	13.7	13.8	14.5
81,0°	8.8	8.2	8.4	8.2	8.4	8.5	9.0	9.1	9.6	9.8	10.3	10.3	10.8	11.1	11.6
82,0°	6.5	6.1	6.1	6.1	6.4	6.4	6.7	6.9	7.3	7.3	7.8	7.9	8.4	8.6	9.0
83,0°	4.6	4.3	4.4	4.4	4.6	4.6	5.0	5.0	5.3	5.4	5.8	5.9	6.1	6.3	6.7
84,0°	3.0	2.7	3.0	2.7	3.0	3.0	3.2	3.2	3.4	3.5	3.9	3.9	4.3	4.4	4.7
85,0°	1.9	1.9	1.9	1.9	2.0	1.9	2.0	2.0	2.2	2.2	2.5	2.5	2.7	2.7	3.0
86,0°	1.4	1.3	1.4	1.3	1.3	1.2	1.3	1.2	1.4	1.3	1.4	1.3	1.5	1.5	1.8
87,0°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
89,0°	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383 siteco
--	--	---------------------------------------

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	190.7	183.9	152.7	136.4	133.9	142.5	133.0	128.1	117.1	109.9	98.2	90.8	80.7	74.3	56.2
74,0°	109.9	98.2	75.3	71.3	84.6	97.3	90.8	89.9	82.8	80.3	71.4	67.9	60.4	56.5	43.6
75,0°	55.6	48.5	42.3	44.5	56.6	64.5	60.4	60.8	56.4	55.5	49.2	46.5	42.5	41.7	35.7
76,0°	31.8	31.5	30.6	31.9	37.0	40.7	38.8	39.4	36.7	36.8	34.1	33.6	32.3	32.5	29.7
77,0°	25.2	25.7	25.5	26.0	27.6	29.3	28.3	28.9	27.8	28.1	26.8	27.4	27.2	27.6	25.7
78,0°	20.8	21.8	21.6	22.5	22.5	23.8	22.8	23.4	22.4	23.5	24.4	26.3	27.6	25.5	22.8
79,0°	17.4	18.1	18.3	18.8	18.9	19.5	19.2	19.3	19.7	22.2	26.1	30.2	30.9	26.0	21.1
80,0°	14.4	15.0	15.3	15.7	15.7	16.2	16.1	16.4	17.5	21.5	27.2	32.5	31.5	25.4	18.8
81,0°	11.6	11.8	12.1	12.5	12.5	13.0	13.0	13.2	14.4	18.4	23.7	28.5	27.2	22.0	15.6
82,0°	9.1	9.6	9.7	10.1	10.2	10.4	10.2	10.4	11.0	14.0	18.2	22.0	20.7	17.1	12.4
83,0°	6.9	7.3	7.3	7.7	7.6	7.9	7.8	8.0	8.3	10.1	12.2	14.5	13.8	12.5	9.3
84,0°	4.6	5.1	5.1	5.3	5.3	5.7	5.6	5.8	5.7	6.4	7.3	8.9	8.6	8.4	6.5
85,0°	3.1	3.3	3.2	3.5	3.5	3.7	3.7	3.9	3.8	4.3	4.4	5.1	5.1	5.0	4.0
86,0°	1.7	2.0	1.8	2.1	2.0	2.2	2.0	2.5	2.2	2.5	2.2	2.6	2.2	2.6	2.1
87,0°	0.9	0.9	0.9	1.1	1.1	1.2	1.2	1.3	1.2	1.3	1.2	1.3	1.2	1.3	1.2
88,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.8	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH7H4AA08MA
EAN: 4069025096487

LP number
59066_1383

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	36.5	33.7	33.2	32.3	32.0	31.6	31.9	31.5	31.1	30.6	30.7	31.1	31.7	31.6	31.8
74,0°	33.0	30.9	30.5	29.4	29.3	28.7	29.6	27.3	27.8	27.4	27.8	28.0	28.7	28.4	28.9
75,0°	30.2	28.1	27.6	26.1	26.1	25.4	26.3	24.1	25.0	24.6	25.0	25.2	25.5	25.4	25.9
76,0°	27.1	24.6	23.7	22.6	22.4	22.0	22.5	21.3	22.0	21.5	21.9	21.9	22.2	22.5	22.8
77,0°	24.1	21.4	20.7	19.7	19.5	19.0	19.6	18.7	19.2	18.6	18.9	19.3	19.2	19.5	20.1
78,0°	21.3	18.4	18.0	16.8	16.7	16.3	16.8	16.3	16.7	15.7	16.3	16.3	16.4	16.6	17.4
79,0°	18.6	16.1	15.3	14.4	14.1	14.0	14.4	14.5	14.5	13.1	13.4	13.5	13.5	14.1	14.5
80,0°	15.8	13.7	12.8	12.1	11.8	11.9	12.1	12.4	12.1	10.6	10.9	11.0	11.1	11.6	12.1
81,0°	12.8	11.2	10.4	9.7	9.5	9.3	9.7	9.7	9.1	7.9	8.3	8.5	8.8	9.1	9.6
82,0°	10.3	9.1	8.3	7.7	7.5	7.3	7.6	7.1	6.6	5.9	6.1	6.4	6.7	7.0	7.3
83,0°	7.9	6.9	6.3	5.7	5.6	5.4	5.7	5.0	4.4	4.3	4.5	4.6	4.8	5.1	5.3
84,0°	5.7	4.7	4.4	3.9	3.8	3.7	4.0	3.0	2.8	2.8	3.0	3.1	3.2	3.3	3.4
85,0°	3.8	3.1	2.8	2.6	2.6	2.4	2.6	1.9	1.9	1.9	2.0	2.0	2.1	2.1	2.2
86,0°	2.1	1.9	1.8	1.4	1.7	1.4	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
87,0°	1.2	1.2	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.8	0.7	0.8	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family	Order number: 5XH7H4AA08MA	LP number
Streetlight 31 midi toolless	EAN: 4069025096487	59066_1383
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	32.4	33.6	34.6	36.5	37.7	38.8	39.5	43.3	51.1	60.7	64.6	64.9	59.5	56.5	55.0
74,0°	29.3	30.5	31.3	32.8	33.8	35.2	35.6	37.3	39.9	46.0	50.4	52.9	50.3	49.4	49.0
75,0°	26.3	27.3	28.1	29.6	30.5	31.9	32.4	33.7	34.9	37.7	40.0	42.8	42.6	43.5	43.4
76,0°	23.1	24.0	24.7	26.1	26.8	28.1	28.6	29.8	30.6	32.3	33.7	35.6	36.5	37.7	38.2
77,0°	20.1	21.2	21.9	23.1	23.7	24.7	25.2	26.3	26.8	28.5	29.7	31.2	31.8	33.2	33.2
78,0°	17.3	18.4	18.7	20.1	20.1	21.3	21.2	22.6	22.9	24.7	25.1	26.8	27.1	28.5	28.0
79,0°	14.8	15.6	16.1	16.8	16.9	17.6	18.0	19.0	19.5	20.7	21.3	22.6	22.9	23.7	23.8
80,0°	12.4	13.1	13.6	13.8	13.8	14.3	14.8	15.7	16.2	17.1	17.7	18.7	18.9	19.6	19.6
81,0°	9.8	10.3	10.5	10.8	10.9	11.2	11.5	12.2	12.5	13.2	13.7	14.5	14.7	15.4	15.3
82,0°	7.6	7.9	8.0	8.4	8.4	8.6	8.8	9.1	9.3	10.1	10.6	11.2	11.6	11.9	11.8
83,0°	5.4	5.8	5.8	6.0	6.0	6.3	6.3	6.6	6.7	7.3	7.6	8.0	8.3	8.6	8.8
84,0°	3.4	3.8	3.8	3.9	3.9	4.1	4.1	4.4	4.4	4.7	4.8	5.2	5.2	5.7	5.7
85,0°	2.2	2.4	2.4	2.5	2.5	2.6	2.5	2.7	2.6	2.8	2.8	3.2	3.1	3.4	3.3
86,0°	1.4	1.5	1.4	1.5	1.4	1.7	1.4	1.7	1.5	1.7	1.7	1.9	1.7	1.9	1.7
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.1	0.9	1.1	1.1	0.9	0.9	0.9	0.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	55.3	55.3	56.5	56.4	56.6	53.7	51.4	47.7	44.6	42.3	41.2	41.2	41.9	7.8	975.2
74,0°	49.5	49.9	50.6	49.8	48.8	47.2	45.1	40.9	38.7	34.9	34.3	33.3	34.3	5.5	980.7
75,0°	44.6	44.5	44.7	43.5	43.0	40.6	37.0	34.1	31.5	28.9	27.7	27.1	27.9	4.0	984.7
76,0°	38.9	38.4	38.7	36.8	36.7	33.0	30.7	26.5	23.7	21.1	19.9	19.0	19.6	3.1	987.8
77,0°	33.7	33.5	32.9	32.2	29.8	27.3	24.6	20.8	18.0	15.0	13.6	12.3	12.5	2.6	990.3
78,0°	29.2	27.7	28.4	25.8	25.0	21.2	19.0	14.5	12.5	9.3	8.2	6.7	7.1	2.2	992.5
79,0°	24.0	23.3	23.3	21.3	19.6	16.7	14.1	10.8	8.0	5.7	3.9	3.0	3.1	1.8	994.3
80,0°	19.5	19.5	18.7	17.4	15.8	13.1	10.3	7.9	5.9	3.8	2.4	1.9	1.9	1.6	995.9
81,0°	15.8	15.3	14.9	13.4	11.8	9.6	7.9	5.9	4.0	2.8	1.7	1.4	1.4	1.2	997.1
82,0°	12.1	11.7	11.4	10.3	8.9	7.2	5.8	4.5	3.1	2.1	1.4	1.2	1.2	1.0	998.1
83,0°	8.8	8.6	8.4	7.6	6.6	5.3	4.4	3.3	2.4	1.4	1.2	1.2	1.2	0.7	998.8
84,0°	6.0	5.7	5.7	5.0	4.5	3.5	3.1	2.4	1.9	1.2	1.2	0.9	0.9	0.5	999.2
85,0°	3.5	3.5	3.7	3.1	2.8	2.4	2.1	1.7	1.4	1.2	0.9	0.9	0.9	0.3	999.5
86,0°	1.9	1.7	1.8	1.4	1.7	1.4	1.4	1.2	1.2	0.9	0.9	0.9	0.9	0.2	999.7
87,0°	1.2	1.2	1.2	1.2	1.1	0.9	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.8
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	19840	145.3	161.8	153.6
95	237	251	18841	134.8	149.9	142.4
90	221	249	17858	125.3	139.1	132.2
85	206	246	16896	116.2	128.9	122.6
80	191	244	15895	107.3	119.1	113.2
75	176	241	14866	98.7	109.3	104.0
70	162	238	13873	90.6	100.2	95.4
65	149	234	12922	83.2	92.0	87.6
60	136	231	11940	75.7	83.7	79.7
55	123	227	10933	68.4	75.5	72.0
50	110	223	9896	61.1	67.5	64.3
45	98	219	8919	54.4	60.1	57.2
40	86	214	7917	47.7	52.7	50.2
35	75	209	6978	41.7	45.9	43.8
30	63	203	5933	35.2	38.7	37.0
25	52	196	4953	29.3	32.1	30.7
20	41	187	3957	23.5	25.7	24.6
15	30	176	2939	17.8	19.5	18.6
11	21	163	2095	13.2	14.3	13.8

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	20480	146.9	163.6	155.2
95	238	252	19473	137.0	152.3	144.6
90	222	249	18428	127.4	141.4	134.4
85	207	247	17412	118.2	131.1	124.6
80	192	244	16365	109.2	121.1	115.2
75	178	241	15360	101.0	111.8	106.4
70	164	238	14332	93.0	102.7	97.8
65	151	235	13345	85.4	94.4	89.9
60	137	231	12254	77.3	85.4	81.4
55	125	228	11297	70.4	77.8	74.1
50	112	224	10235	63.1	69.6	66.4
45	100	220	9235	56.3	62.1	59.2
40	88	215	8214	49.5	54.7	52.1
35	76	210	7169	42.9	47.2	45.0
30	64	204	6106	36.3	39.8	38.0
25	53	197	5110	30.3	33.2	31.8
20	42	188	4100	24.4	26.7	25.5
15	31	177	3068	18.7	20.3	19.5
10	21	163	2118	13.4	14.5	14.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	20180	146.1	162.7	154.4
95	237	251	19143	135.6	150.7	143.1
90	222	249	18191	126.6	140.5	133.6
85	206	246	17135	116.9	129.6	123.2
80	192	244	16177	108.5	120.4	114.4
75	177	241	15124	99.9	110.5	105.2
70	163	238	14113	91.8	101.4	96.6
65	150	235	13142	84.2	93.2	88.7
60	137	231	12145	76.8	84.8	80.8
55	124	228	11122	69.4	76.7	73.1
50	111	224	10071	62.1	68.5	65.3
45	99	219	9083	55.3	61.1	58.2
40	87	215	8070	48.6	53.7	51.2
35	75	209	7034	42.0	46.2	44.1
30	64	204	6068	36.0	39.5	37.8
25	53	197	5080	30.1	33.0	31.6
20	42	188	4077	24.2	26.5	25.4
15	31	177	3052	18.5	20.2	19.4
10	21	163	2108	13.3	14.4	13.8

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H4AA08MA EAN: 4069025096487	LP number 59066_1383
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	19840.0	145.3
5.0	20480.0	146.9
15.0	20180.0	146.1