

Photometric test report

Family

Streetlight 31 mini toolless



Order number: 5XH6A31A08GA

EAN: 4069025103536

LP number

59580_194

serial documentation

11.04.2024

Version

post-top or side-entry mounting

Optic

direct, asymmetric extremely wide distribution
P100003

Cover

toughened safety glass

Lamps

LED 3000 K | CRI ≥ 70


Controlgear

ECG SITECO

Rated values

Net luminous flux = 5550 lm
Power consumption = 37.3 W
Luminous efficacy = 148.8 lm/W


siteco

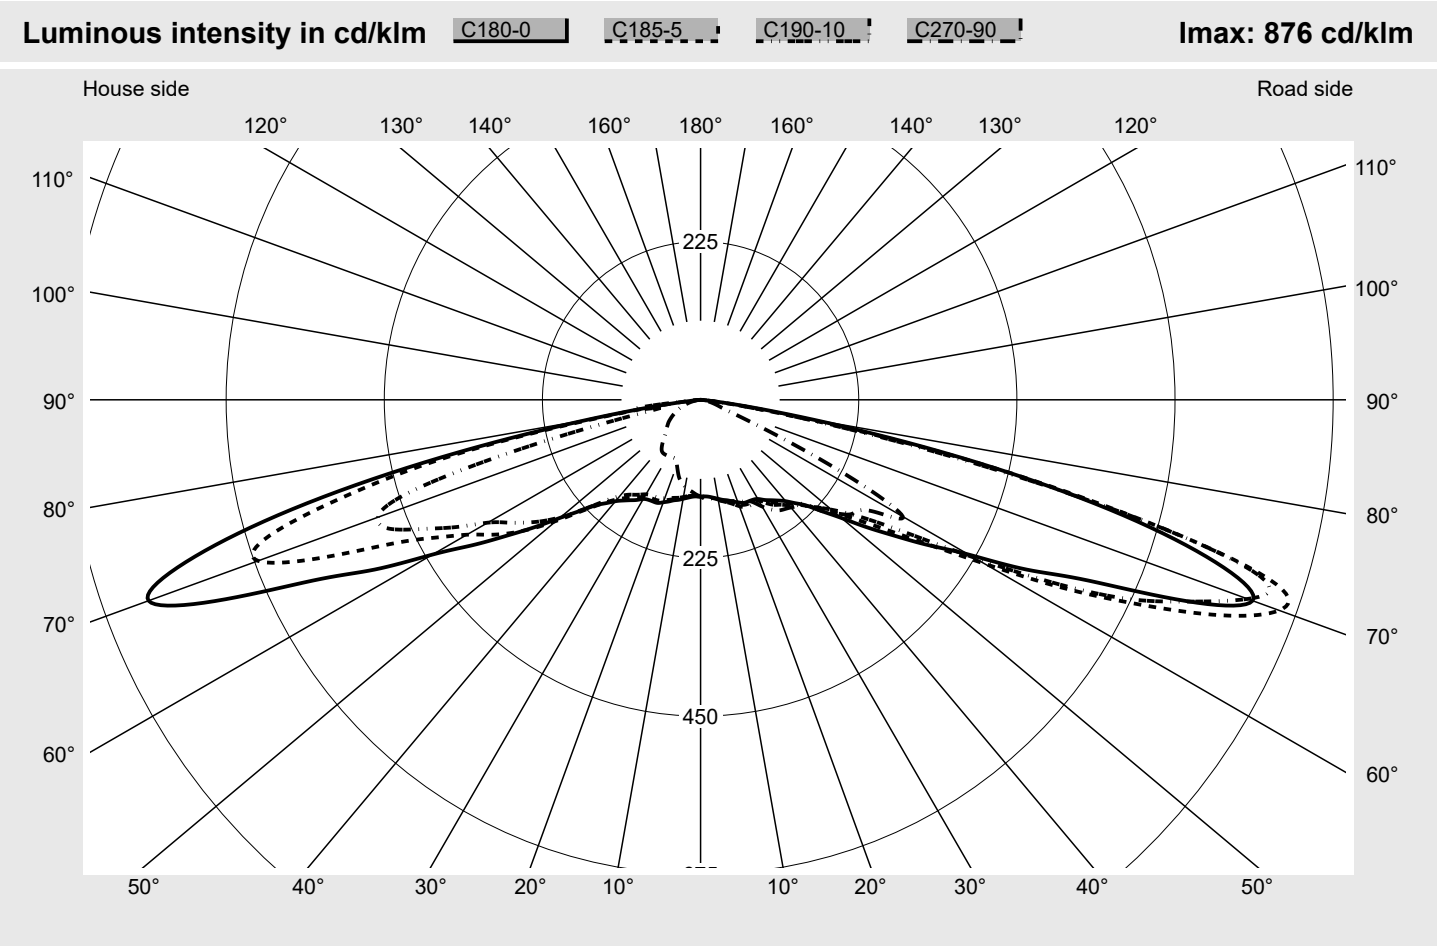

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G1
Eta 0° - 90°	100.0%	Imax 70°	876.0
Eta 90° - 180°	0.0%	Imax 80°	162.9
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31A08GA EAN: 4069025103536	LP number 59580_194
Envelope curve in cd/klm KMK 70° KMK 67.5° KMK 65° KMK 62.5°		siteco

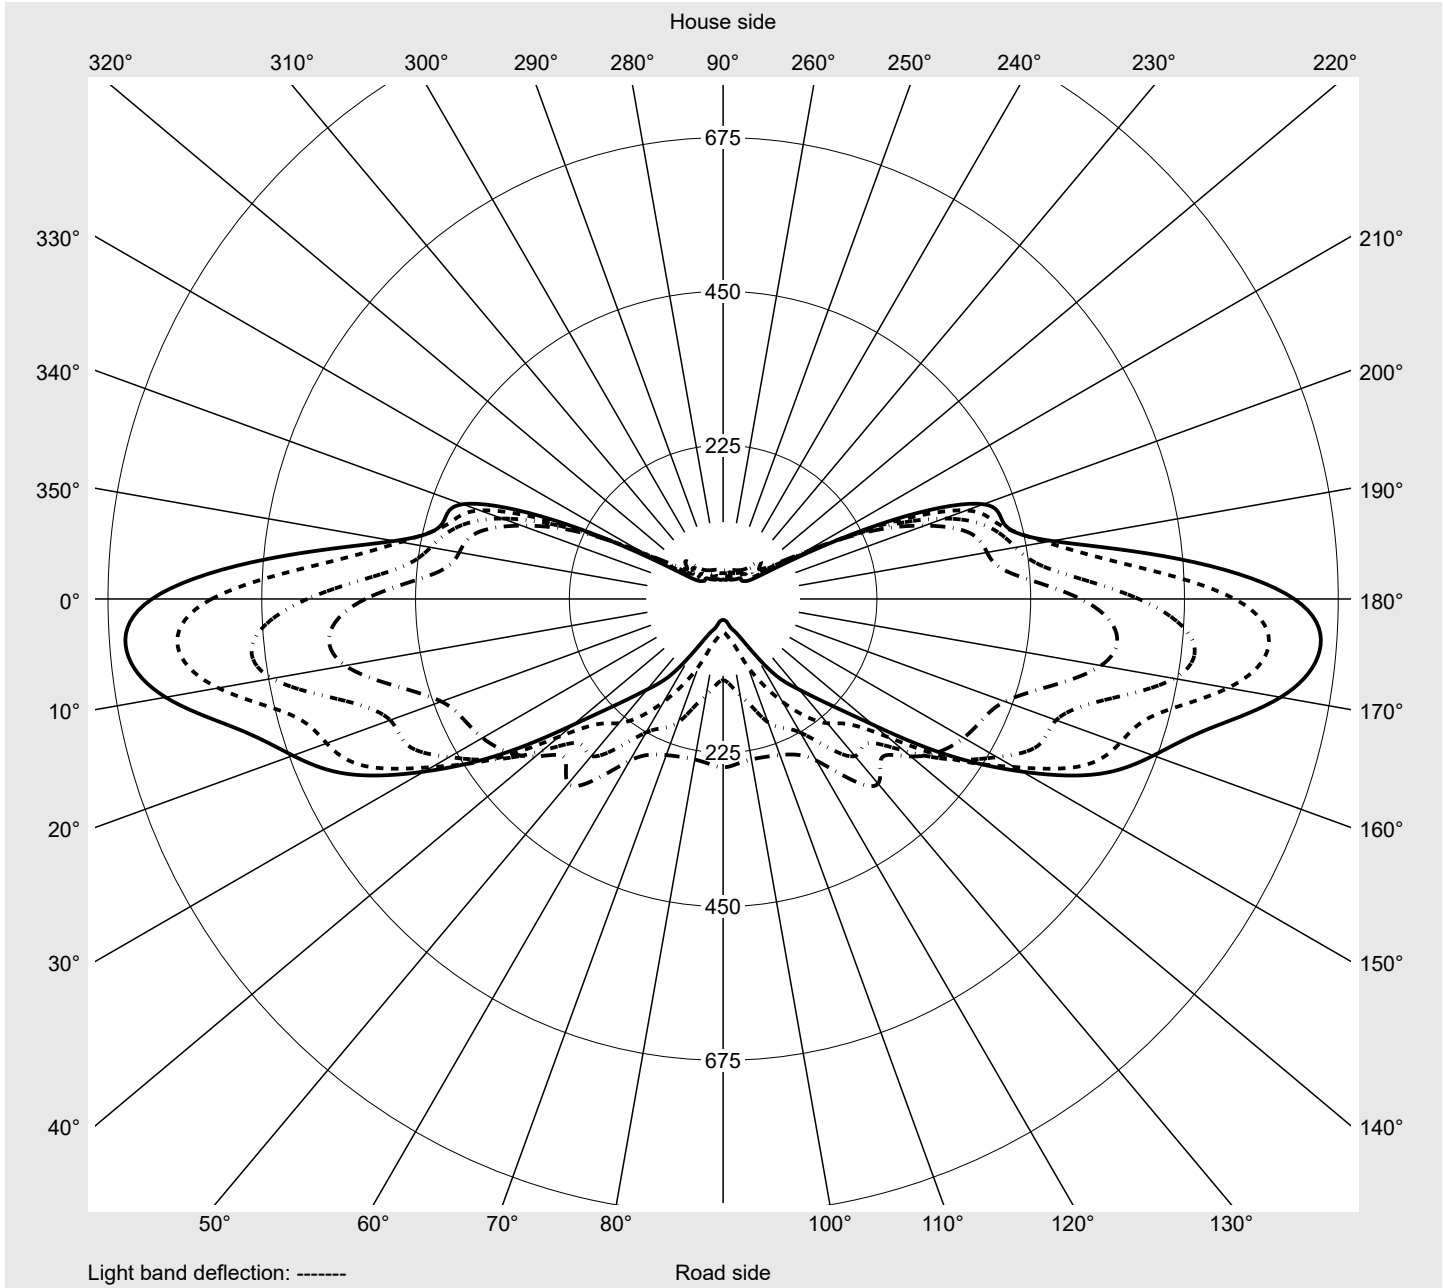

Photometric test report

Family Streetlight 31 mini toolless		Order number: 5XH6A31A08GA EAN: 4069025103536										LP number 59580_194	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	137.6	137.8	138.1	138.4	138.7	138.9	139.1	139.2	139.4	139.6	139.8	140.0	140.2
5,0°	138.5	139.2	139.6	140.3	140.5	140.9	141.1	141.2	141.4	141.4	141.4	141.3	141.2
7,5°	140.5	141.3	142.0	142.6	143.1	143.3	143.5	143.3	143.1	142.9	142.6	142.4	142.2
10,0°	143.0	144.0	144.7	145.4	145.8	145.8	145.8	145.5	145.2	145.0	145.0	144.8	144.8
12,5°	145.8	146.9	147.9	148.9	149.3	149.4	149.3	149.0	148.9	149.1	149.1	149.3	149.3
15,0°	148.1	149.7	151.3	152.6	153.4	153.6	153.4	153.2	153.5	153.9	154.4	154.3	153.8
17,5°	151.7	153.6	155.7	157.5	158.7	158.8	158.8	159.1	159.4	159.8	159.7	159.2	158.2
20,0°	155.1	158.1	161.0	163.3	164.2	164.1	164.6	165.3	165.7	165.4	164.5	163.2	161.8
22,5°	158.8	161.7	165.4	168.6	169.9	170.3	170.6	171.2	171.3	170.6	169.1	167.3	166.1
25,0°	159.7	162.7	166.1	169.6	172.1	174.1	175.7	176.2	175.6	174.6	173.5	172.8	171.9
27,5°	160.5	163.1	166.1	169.3	172.0	175.1	178.4	179.6	178.9	178.4	178.4	178.1	176.9
30,0°	162.9	166.0	168.1	170.2	171.6	174.4	178.2	181.1	182.4	182.5	182.5	182.3	182.5
32,5°	168.9	172.1	174.5	175.7	174.6	174.4	176.5	180.0	185.2	187.4	187.6	188.9	191.5
35,0°	174.4	178.4	182.5	184.8	182.5	180.4	176.7	177.9	185.6	194.2	194.3	195.4	199.0
37,5°	180.6	184.7	188.1	190.0	189.4	187.5	184.0	179.4	184.8	195.6	197.1	198.4	207.5
40,0°	188.3	193.0	196.0	196.4	195.8	194.5	193.8	189.1	183.5	191.7	198.6	205.7	221.9
42,5°	199.5	201.6	203.3	202.7	200.8	199.7	201.6	201.1	191.3	187.7	204.5	218.7	240.8
45,0°	212.8	213.5	214.0	210.6	206.9	204.9	205.5	210.8	207.3	188.5	215.7	238.2	261.1
47,5°	234.8	228.3	226.8	222.0	215.4	211.2	210.0	219.7	224.9	198.8	232.6	260.4	279.8
50,0°	261.5	249.9	243.2	238.9	228.9	221.6	220.2	228.8	245.1	220.2	254.2	283.6	303.5
52,5°	297.7	280.2	266.1	259.2	247.5	239.7	238.5	246.0	265.8	247.9	282.3	316.4	335.3
55,0°	337.4	322.0	301.1	288.9	277.4	268.8	266.3	269.5	288.8	278.7	319.2	344.1	347.3
57,5°	385.1	381.6	359.0	337.9	321.9	309.6	301.3	298.3	309.3	319.9	348.2	353.7	371.5
60,0°	440.3	466.2	448.4	408.8	375.5	357.0	344.2	340.3	341.9	339.0	355.2	362.7	338.2
62,5°	523.2	577.6	561.4	494.1	438.7	418.3	406.4	388.4	358.4	328.4	352.8	320.5	273.2
65,0°	608.4	689.1	670.0	574.3	518.4	508.2	462.7	409.5	345.5	298.5	299.9	263.6	225.5
67,5°	748.5	800.9	750.1	654.7	617.4	578.3	491.9	407.7	313.8	258.9	237.3	209.1	173.7
70,0°	835.7	876.0	828.3	735.0	669.9	605.9	505.2	395.6	286.5	216.9	173.1	138.8	95.3
72,5°	767.9	847.4	834.6	753.0	675.5	624.1	476.4	338.3	269.5	155.5	103.4	68.3	45.4
75,0°	601.3	627.5	623.8	596.1	588.3	536.2	347.0	224.8	141.1	94.6	57.6	37.7	31.5
77,5°	377.2	369.4	340.9	324.6	382.3	290.7	181.7	68.8	46.5	55.4	30.3	22.6	19.4
80,0°	162.9	136.5	129.6	138.8	127.6	130.2	48.4	27.0	26.4	29.1	16.9	12.4	11.1
82,5°	43.8	36.6	34.8	35.5	31.5	36.1	19.4	15.8	10.2	11.2	8.3	6.4	6.1
85,0°	4.0	3.8	4.0	5.1	5.8	5.1	4.0	3.4	3.4	3.3	3.4	2.9	2.4
87,5°	1.6	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.1	1.0	1.0	0.9	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family				Order number: 5XH6A31A08GA								LP number			
Streetlight 31 mini toolless				EAN: 4069025103536								59580_194			
Table of values for luminous intensities										Maximum luminous intensity				siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°		
γ	Luminous intensity in cd/klm														
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7		
2,5°	140.3	140.4	140.6	140.7	140.6	140.7	137.3	136.8	136.5	136.2	136.0	135.7	135.4		
5,0°	141.1	141.1	141.1	141.0	141.0	140.9	137.8	137.0	136.4	135.7	135.0	134.3	133.8		
7,5°	142.0	142.0	142.0	141.9	141.9	141.9	139.4	138.3	137.3	136.3	135.2	134.2	133.3		
10,0°	144.7	144.6	144.5	144.5	144.5	144.5	141.8	140.4	139.1	137.7	136.2	134.7	133.2		
12,5°	149.0	148.6	148.1	147.8	147.6	147.5	144.3	142.7	141.1	139.3	137.4	135.6	134.0		
15,0°	153.2	152.3	151.4	150.5	149.8	149.5	146.4	144.4	142.4	140.2	138.1	136.0	133.8		
17,5°	157.0	155.4	153.9	152.4	151.3	151.0	149.2	146.7	143.9	141.2	138.5	135.7	132.9		
20,0°	160.4	158.8	156.9	154.9	153.7	153.4	152.3	149.1	145.6	142.2	138.6	135.3	132.1		
22,5°	165.5	164.5	162.2	159.4	157.3	156.6	155.1	151.1	147.4	143.6	139.6	135.8	131.5		
25,0°	170.8	168.7	166.0	162.7	159.8	158.7	156.2	152.3	148.5	144.4	140.4	136.2	130.8		
27,5°	176.0	174.0	171.6	168.7	166.2	165.0	156.9	153.1	149.2	145.0	140.9	135.8	128.2		
30,0°	184.5	184.6	183.8	180.6	177.2	175.4	159.5	155.3	150.8	146.5	141.8	134.9	123.5		
32,5°	195.4	197.6	198.7	194.5	188.1	184.6	164.6	159.9	154.5	149.5	143.2	133.0	116.6		
35,0°	205.3	212.3	214.6	208.3	197.4	192.2	170.0	164.9	159.2	153.4	144.3	128.6	108.6		
37,5°	220.1	229.7	229.4	219.5	203.8	196.1	176.3	170.3	164.6	157.3	143.9	122.6	101.1		
40,0°	239.9	248.1	246.3	233.7	211.7	199.9	185.0	179.2	172.3	162.5	142.6	115.1	94.4		
42,5°	259.0	266.7	261.1	245.8	218.9	204.2	197.3	191.9	183.9	169.6	139.8	107.7	88.8		
45,0°	276.7	281.0	272.9	255.5	228.0	209.9	214.7	210.8	199.3	178.4	137.7	99.9	85.4		
47,5°	294.0	298.2	291.4	276.4	250.6	234.4	237.9	233.7	216.5	188.6	139.4	93.3	84.2		
50,0°	322.1	330.4	318.6	300.5	266.7	251.3	267.9	259.4	235.1	201.0	143.1	91.2	85.4		
52,5°	348.5	350.6	342.2	322.0	287.4	267.8	300.3	283.5	253.9	216.6	153.4	94.5	87.8		
55,0°	363.6	368.7	344.6	319.7	295.6	274.8	330.8	304.6	274.6	235.8	169.5	102.0	89.2		
57,5°	371.4	338.9	325.0	316.3	309.8	299.1	357.3	325.2	301.8	259.9	193.8	115.5	89.8		
60,0°	311.8	300.4	292.0	295.6	316.6	332.1	383.9	349.6	330.6	283.7	214.3	128.4	88.8		
62,5°	251.4	243.1	239.2	238.5	242.0	246.4	424.5	392.1	373.3	313.8	231.2	134.7	84.5		
65,0°	208.3	192.0	163.2	143.3	126.9	119.0	484.3	434.6	404.0	344.1	241.6	131.4	74.2		
67,5°	138.1	105.2	74.8	60.9	52.4	49.2	589.7	479.2	419.0	378.8	255.5	121.3	59.0		
70,0°	65.5	51.0	43.8	35.2	31.7	30.6	669.9	488.6	425.5	405.3	271.8	102.8	48.7		
72,5°	37.7	35.0	33.9	26.0	23.8	23.5	643.4	428.4	419.5	405.8	255.3	81.7	43.6		
75,0°	27.9	25.6	24.4	19.8	17.9	17.5	513.0	241.7	319.6	334.9	189.4	58.8	35.0		
77,5°	18.2	17.0	15.9	14.2	12.4	12.4	350.6	78.7	160.1	216.5	109.0	42.1	26.4		
80,0°	11.5	10.3	9.6	8.1	7.6	7.5	145.4	68.9	132.5	123.3	59.1	28.9	17.3		
82,5°	5.9	5.1	4.8	4.2	3.9	4.0	45.8	92.4	98.2	54.2	31.1	19.5	11.7		
85,0°	2.2	2.0	1.8	1.6	1.6	1.5	3.8	6.6	9.0	5.6	8.5	7.6	5.3		
87,5°	0.8	0.6	0.5	0.5	0.5	0.5	1.7	1.8	1.8	1.8	1.8	1.7	1.7		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

Photometric test report

Family Streetlight 31 mini toolless				Order number: 5XH6A31A08GA EAN: 4069025103536								LP number 59580_194			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	0.2	0.2		
2,5°	135.3	135.0	134.9	134.9	134.7	134.7	134.9	134.9	135.0	135.1	135.1	1.6	1.9		
5,0°	133.2	132.7	132.4	132.1	131.9	131.7	131.8	131.7	131.8	131.8	131.8	3.3	5.1		
7,5°	132.4	131.5	130.8	130.0	129.4	129.1	128.9	128.9	128.8	128.8	128.9	4.9	10.1		
10,0°	131.9	130.7	129.6	128.6	127.8	126.9	126.4	126.0	125.8	125.8	125.6	6.6	16.6		
12,5°	132.1	130.2	128.2	126.5	125.0	123.7	122.6	121.8	121.3	121.2	121.1	8.3	24.9		
15,0°	131.3	129.1	126.7	124.4	122.2	120.3	118.7	117.3	116.5	116.0	115.9	10.0	34.9		
17,5°	130.2	127.4	124.7	121.4	117.9	114.7	111.9	109.7	108.3	107.5	107.3	11.7	46.7		
20,0°	128.7	125.0	120.6	115.6	110.7	106.5	103.3	100.9	99.4	98.7	98.5	13.4	60.0		
22,5°	126.5	120.4	113.3	106.9	101.5	97.5	94.6	93.0	92.2	92.0	91.9	15.0	75.0		
25,0°	122.9	113.4	104.7	97.9	93.4	91.1	90.1	90.1	90.3	90.8	91.0	16.6	91.7		
27,5°	116.8	105.0	96.2	91.1	89.0	88.7	89.2	89.9	90.7	91.3	91.4	18.3	110.0		
30,0°	108.8	97.0	90.0	87.8	87.6	87.9	89.0	90.3	91.2	92.0	92.2	20.0	130.0		
32,5°	101.0	90.7	87.2	87.1	86.9	87.4	88.7	90.5	91.8	92.7	92.7	22.0	152.0		
35,0°	93.8	87.1	86.7	86.6	86.4	87.1	88.8	90.7	92.3	92.8	92.7	24.1	176.0		
37,5°	89.0	86.6	86.7	86.0	85.9	86.8	88.2	89.9	91.1	91.2	90.8	26.1	202.1		
40,0°	86.3	86.8	85.9	85.4	85.7	86.0	86.4	86.9	87.0	86.2	85.5	28.3	230.5		
42,5°	86.3	86.6	85.4	85.2	84.9	84.4	83.0	81.7	80.6	79.4	78.7	30.7	261.1		
45,0°	86.9	86.1	84.8	83.6	82.2	80.6	78.7	76.5	74.5	72.5	71.7	33.3	294.4		
47,5°	88.0	86.7	83.6	80.8	78.1	76.1	74.1	71.8	69.7	67.7	66.9	36.5	330.9		
50,0°	90.6	89.1	81.1	76.3	73.1	71.2	69.0	67.0	65.3	63.7	63.1	40.4	371.3		
52,5°	92.5	90.6	77.8	71.4	68.2	66.2	64.1	62.3	60.9	59.7	59.1	44.9	416.2		
55,0°	91.0	89.5	75.1	67.0	63.6	61.4	59.1	57.8	56.7	55.7	55.6	49.6	465.8		
57,5°	87.1	90.3	71.6	62.0	58.0	56.1	54.5	53.4	52.6	51.2	51.1	54.7	520.5		
60,0°	79.8	88.3	67.6	57.7	53.6	51.4	49.9	49.0	48.1	46.8	46.6	59.3	579.8		
62,5°	68.5	77.9	63.2	52.8	48.6	46.4	45.1	44.2	43.2	42.2	41.9	62.7	642.5		
65,0°	57.6	63.2	56.5	47.7	44.1	41.7	40.4	40.3	38.7	37.8	37.8	64.7	707.2		
67,5°	48.5	48.6	48.1	41.8	38.5	36.5	35.2	35.0	33.6	33.4	33.2	66.2	773.4		
70,0°	40.7	38.1	39.3	35.9	33.1	31.1	30.1	30.0	28.5	28.1	28.5	67.0	840.4		
72,5°	34.1	30.9	31.6	30.4	28.1	26.2	25.0	24.7	23.5	22.9	22.9	63.1	903.6		
75,0°	28.3	25.1	25.1	24.8	23.1	21.3	20.1	19.5	18.5	17.9	18.2	48.2	951.8		
77,5°	22.0	19.5	18.9	19.3	17.9	16.5	15.2	14.3	13.9	13.4	13.5	27.9	979.7		
80,0°	15.2	13.6	13.0	13.6	12.6	11.5	10.6	9.9	9.4	9.2	9.2	13.1	992.8		
82,5°	10.2	9.1	8.0	8.7	8.1	7.4	6.8	6.2	5.7	5.6	5.7	5.7	998.5		
85,0°	5.1	4.8	4.6	4.6	4.6	4.0	3.6	3.3	3.0	3.1	3.1	1.1	999.6		
87,5°	1.6	1.6	1.6	1.4	1.4	1.5	1.5	1.4	1.3	1.4	1.2	0.4	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31A08GA EAN: 4069025103536	LP number 59580_194
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5550	37.3	38.7	38.0
95	240	252	5280	35.3	36.5	35.9
90	225	250	4986	33.1	34.2	33.7
85	211	247	4709	31.0	32.0	31.5
80	198	245	4447	29.0	30.1	29.6
75	184	242	4161	27.0	27.9	27.4
70	171	240	3893	25.0	25.9	25.4
65	157	236	3600	23.0	23.8	23.4
60	144	233	3323	21.1	21.8	21.5
55	131	230	3044	19.3	19.9	19.6
50	119	226	2783	17.5	18.1	17.8
45	106	222	2496	15.6	16.1	15.8
40	94	218	2230	14.0	14.4	14.2
35	81	212	1937	12.2	12.6	12.4
30	69	206	1664	10.6	10.9	10.8
25	57	199	1387	9.0	9.2	9.1
20	45	191	1108	7.4	7.5	7.4
15	33	179	826	5.7	5.9	5.8
10	22	164	566	4.2	4.3	4.2
9	20	161	518	3.9	4.0	4.0

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5660	37.8	39.2	38.5
95	240	252	5381	35.7	37.0	36.4
90	226	250	5099	33.6	34.9	34.2
85	212	247	4813	31.5	32.7	32.1
80	198	245	4524	29.4	30.5	30.0
75	185	242	4252	27.5	28.5	28.0
70	171	240	3956	25.4	26.3	25.8
65	158	237	3678	23.5	24.3	23.9
60	145	233	3395	21.5	22.3	21.9
55	132	230	3110	19.6	20.3	20.0
50	119	226	2823	17.8	18.4	18.1
45	107	222	2553	16.0	16.6	16.3
40	94	218	2259	14.2	14.7	14.4
35	82	213	1985	12.5	12.9	12.7
30	70	207	1708	10.9	11.2	11.0
25	57	199	1404	9.1	9.3	9.2
20	45	191	1121	7.5	7.7	7.6
15	34	180	859	6.0	6.1	6.0
10	22	164	572	4.3	4.4	4.4
9	20	161	523	4.0	4.1	4.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31A08GA EAN: 4069025103536	LP number 59580_194
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5610	37.6	38.9	38.2
95	240	252	5335	35.5	36.8	36.2
90	226	250	5057	33.4	34.6	34.0
85	212	247	4776	31.3	32.4	31.8
80	198	245	4489	29.2	30.3	29.8
75	184	242	4200	27.2	28.1	27.6
70	171	240	3927	25.2	26.1	25.6
65	158	237	3653	23.3	24.1	23.7
60	145	233	3373	21.3	22.2	21.8
55	132	230	3090	19.5	20.2	19.8
50	119	226	2805	17.7	18.3	18.0
45	106	222	2515	15.8	16.3	16.0
40	94	218	2246	14.1	14.6	14.4
35	82	213	1974	12.4	12.8	12.6
30	69	206	1676	10.7	11.0	10.8
25	57	199	1396	9.0	9.2	9.1
20	45	191	1115	7.4	7.6	7.5
15	33	179	831	5.7	5.9	5.8
10	22	164	570	4.3	4.4	4.4
9	20	161	521	4.0	4.1	4.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31A08GA EAN: 4069025103536	LP number 59580_194
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	5550.0	37.3
5.0	5660.0	37.8
15.0	5610.0	37.6