

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH7C41T08LA
EAN: 4069025098467

LP number
59081_1873



Version post-top or side-entry mounting, Smart Interface up/down
Optic direct, asymmetric wide distribution S080002
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO - Smart Interface
Rated values Net luminous flux = 13610 lm
 Power consumption = 86.5 W
 Luminous efficacy = 157.3 lm/W

serial
documentation
10.04.2024

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 851 cd/klm

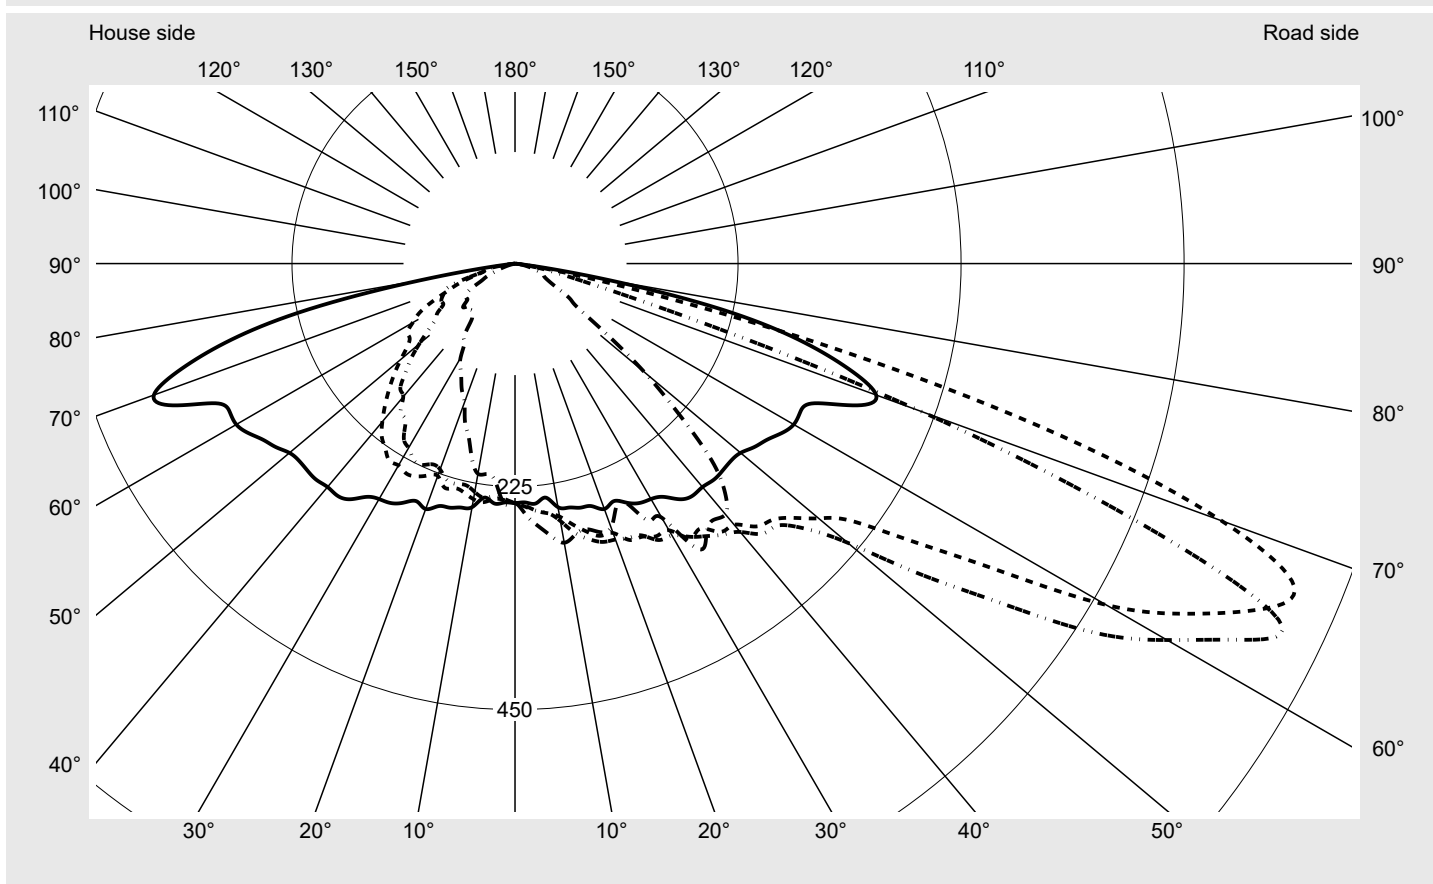

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	826.1
Imax 80°	99.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7C41T08LA EAN: 4069025098467	LP number 59081_1873
Envelope curve in cd/klm KMK 67.5° KMK 65° KMK 62.5° KMK 60°		sit eco

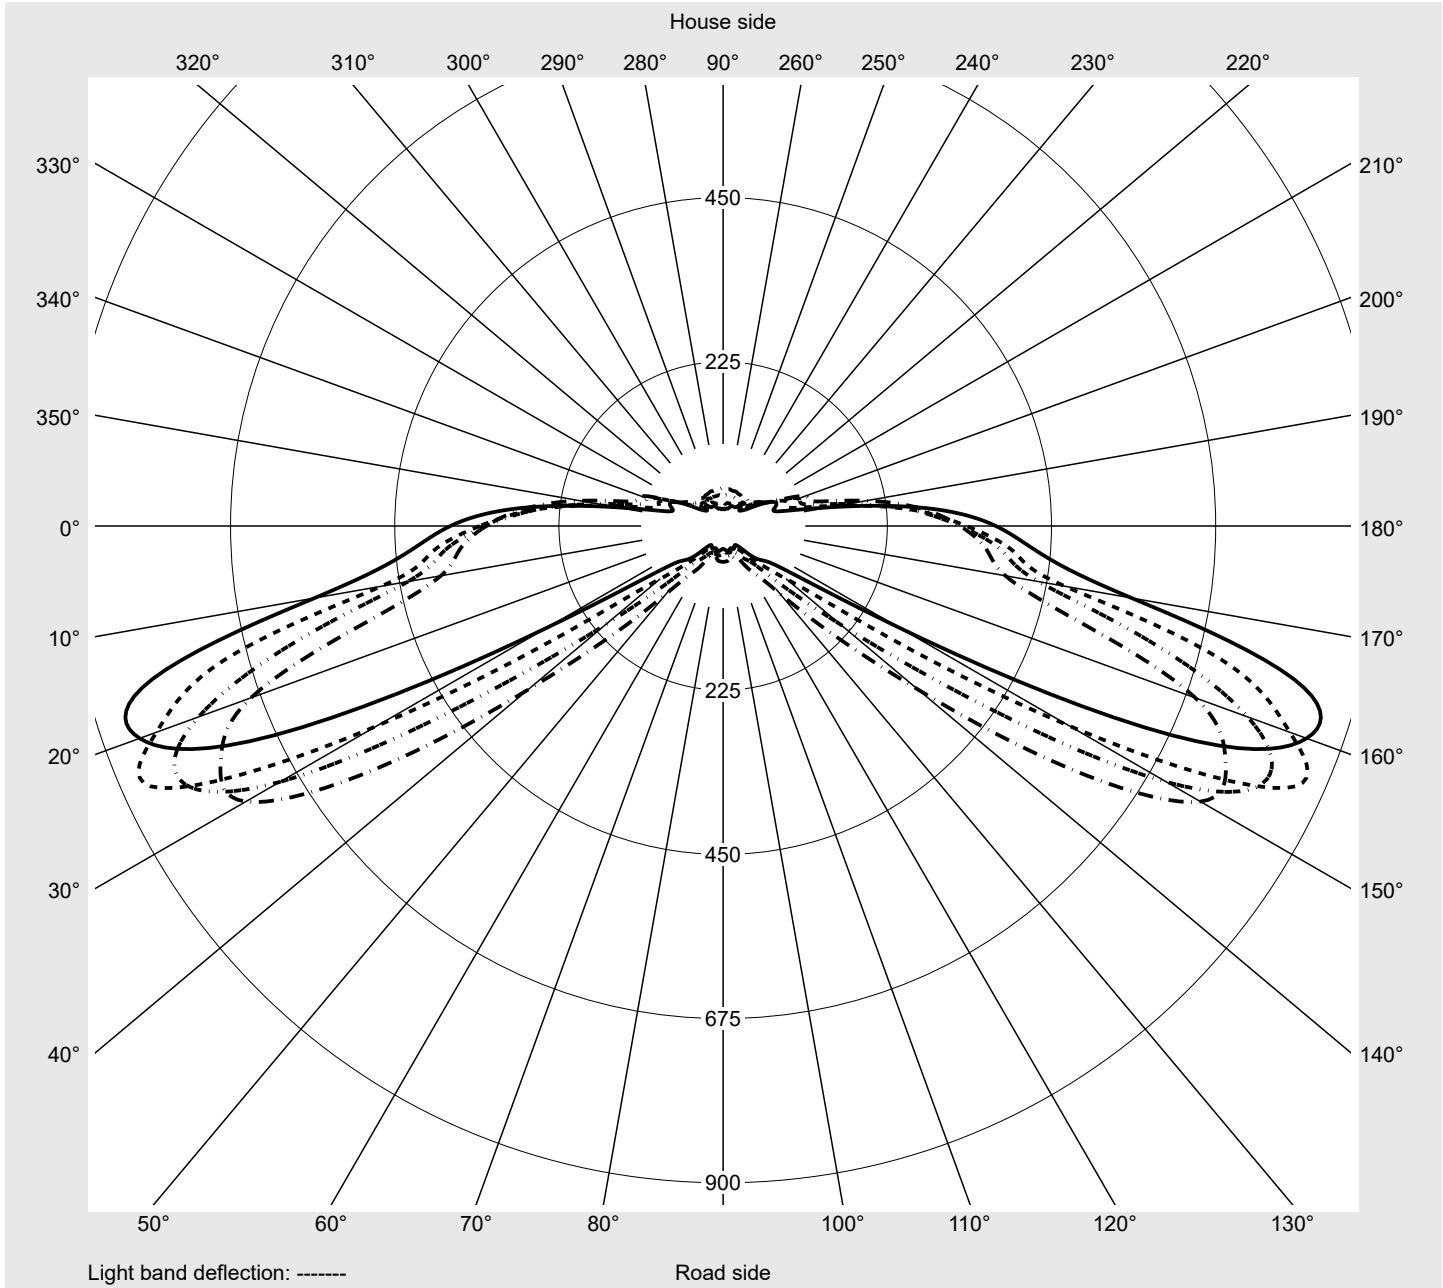

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7C41T08LA EAN: 4069025098467	LP number 59081_1873
--	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6
2,5°	241.2	242.0	242.3	244.6	244.8	245.6	247.5	249.2	247.9	248.6	249.4	249.4	252.1
5,0°	242.8	244.4	246.4	248.5	250.4	250.4	252.4	251.7	252.9	252.6	256.1	257.1	257.8
7,5°	238.1	244.7	246.4	249.3	254.1	253.8	256.3	259.1	262.2	263.1	264.0	270.2	274.3
10,0°	249.5	250.2	252.0	252.1	259.2	263.7	267.3	266.8	269.8	277.2	281.7	280.5	280.0
12,5°	252.1	255.9	263.4	267.0	269.7	278.2	283.8	288.0	292.2	295.4	292.5	284.3	282.5
15,0°	254.9	259.7	266.2	274.9	280.0	287.7	293.3	298.3	295.3	290.9	287.2	283.7	284.2
17,5°	256.6	260.1	271.3	284.8	287.9	294.5	301.9	294.7	290.2	290.7	291.7	283.4	285.5
20,0°	263.5	268.8	274.7	282.1	289.2	296.3	303.4	296.5	296.4	293.4	288.7	286.4	289.0
22,5°	259.6	274.8	287.3	297.4	301.8	299.5	298.4	305.1	306.8	304.8	295.9	292.1	289.5
25,0°	266.1	276.1	285.1	300.8	304.0	302.6	304.5	311.0	310.2	300.7	297.4	287.1	288.5
27,5°	272.3	279.3	296.0	304.9	309.9	314.4	317.9	310.6	307.7	310.4	295.7	288.2	284.2
30,0°	274.3	289.2	300.3	316.6	310.7	316.6	319.9	318.9	312.8	302.3	293.0	291.8	303.0
32,5°	279.1	301.8	308.2	311.8	328.0	326.7	325.8	322.5	315.6	310.9	310.7	313.2	326.1
35,0°	290.3	306.6	313.9	321.4	326.3	335.7	340.7	328.4	326.0	321.2	325.3	345.8	350.0
37,5°	294.9	312.8	318.0	328.7	341.1	344.6	341.9	346.7	346.5	347.6	362.9	374.3	375.4
40,0°	294.3	313.3	322.6	331.9	343.9	353.4	365.0	349.2	364.3	390.5	399.4	410.7	406.8
42,5°	296.2	309.6	325.7	338.2	359.7	369.6	367.0	368.1	396.6	441.2	445.2	430.6	422.9
45,0°	295.8	310.9	331.9	350.3	366.0	373.9	386.4	416.1	448.0	481.0	472.9	440.8	413.9
47,5°	295.0	309.3	335.6	359.3	379.7	395.4	417.5	470.9	503.3	514.4	478.4	422.0	378.4
50,0°	297.1	314.5	341.4	367.3	399.9	438.3	493.0	538.5	552.9	521.1	455.9	389.4	328.3
52,5°	304.1	328.9	343.7	368.4	425.7	514.1	577.6	608.3	578.7	500.9	416.3	327.5	253.0
55,0°	310.1	333.9	356.5	394.4	487.6	595.7	651.0	646.3	561.3	455.6	325.0	237.0	181.1
57,5°	318.6	348.3	372.4	430.0	573.5	693.1	711.4	657.9	500.3	322.7	213.2	147.1	101.6
60,0°	324.7	361.8	392.8	503.4	688.8	759.6	755.3	579.5	348.8	203.5	120.8	83.4	65.9
62,5°	324.4	382.8	438.5	601.3	765.0	821.8	701.7	408.6	209.8	117.2	71.5	56.9	47.8
65,0°	333.4	399.5	475.5	706.3	826.4	849.8	548.2	221.0	113.1	76.8	55.7	41.0	36.7
67,5°	373.8	437.3	568.4	809.1	850.8	678.6	279.2	107.7	74.5	62.1	43.2	32.6	31.2
70,0°	387.7	464.2	653.7	826.1	758.4	435.7	109.8	75.1	59.5	49.6	33.2	30.6	30.4
72,5°	352.6	441.9	676.5	725.8	577.5	196.6	70.4	55.5	45.7	39.8	29.7	22.8	23.7
75,0°	295.8	412.3	568.9	514.5	344.7	80.9	53.8	39.8	29.9	31.3	23.0	17.7	16.7
77,5°	213.1	276.5	324.1	259.9	142.0	43.1	29.2	20.9	19.0	22.5	18.6	15.0	14.8
80,0°	96.9	99.6	98.7	79.6	43.8	20.2	12.7	11.1	13.4	14.1	12.0	9.7	10.4
82,5°	18.6	21.9	19.9	11.4	8.2	6.5	5.2	5.0	6.6	7.4	7.2	5.6	6.1
85,0°	1.2	1.2	1.3	1.4	1.4	1.6	1.6	1.7	2.2	2.8	2.5	2.3	2.1
87,5°	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.4	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless		Order number: 5XH7C41T08LA EAN: 4069025098467										LP number 59081_1873	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6
2,5°	252.7	252.3	253.5	253.9	252.0	253.8	240.2	239.2	240.4	239.0	237.8	236.9	238.2
5,0°	261.6	262.9	262.6	262.5	264.1	265.6	242.6	240.6	238.7	238.3	235.4	234.3	235.6
7,5°	275.6	278.5	278.2	277.4	277.8	277.0	238.4	241.3	240.2	242.8	238.2	235.5	230.7
10,0°	284.8	286.5	285.3	284.2	283.5	286.0	246.7	248.1	242.7	241.4	234.0	230.9	226.1
12,5°	282.9	285.3	280.5	275.7	279.2	280.2	254.8	247.0	239.2	236.8	229.0	222.6	221.7
15,0°	281.8	277.5	277.9	279.4	277.7	277.4	244.7	239.6	238.4	234.6	230.0	219.2	214.8
17,5°	283.9	277.3	277.7	278.9	281.6	284.0	248.6	244.3	240.8	236.9	228.6	219.6	210.1
20,0°	284.6	279.3	279.5	278.5	278.6	283.3	250.4	244.8	243.7	227.9	221.0	216.4	210.3
22,5°	284.0	276.8	272.6	269.1	269.6	266.4	255.9	245.3	244.2	231.5	219.1	210.1	200.8
25,0°	275.9	270.8	271.0	266.2	274.3	266.8	255.1	246.9	247.0	236.8	224.1	207.1	197.3
27,5°	277.2	288.3	288.6	296.6	291.7	292.3	261.4	252.5	247.8	238.4	222.4	196.8	187.3
30,0°	300.5	303.6	307.8	308.9	315.5	295.9	263.4	249.0	247.9	235.1	214.7	195.0	180.4
32,5°	328.9	326.4	327.8	332.8	327.9	340.2	269.9	256.6	249.9	235.9	208.8	190.6	172.1
35,0°	351.6	348.3	339.6	342.2	331.1	336.2	268.3	256.9	245.4	228.0	192.6	183.8	161.7
37,5°	368.3	358.0	349.0	341.4	341.3	326.8	275.2	256.7	243.1	220.7	189.6	173.4	144.9
40,0°	386.9	376.4	360.5	348.9	343.2	330.2	273.0	257.9	233.4	208.2	175.4	159.5	133.5
42,5°	394.5	377.0	352.8	342.8	324.4	313.6	277.4	255.6	229.9	194.1	171.3	138.8	126.0
45,0°	373.7	341.2	311.2	287.0	275.0	280.3	269.7	257.0	221.7	179.7	156.7	124.5	119.8
47,5°	332.0	291.1	265.7	241.8	221.6	223.1	275.8	249.1	205.7	165.3	142.6	109.4	111.0
50,0°	269.1	232.1	206.2	184.4	172.7	170.4	273.8	244.3	195.3	150.3	126.0	94.7	101.4
52,5°	205.2	169.9	145.0	128.5	115.1	114.5	281.2	239.7	184.0	136.5	110.2	80.3	85.7
55,0°	131.1	105.8	91.9	86.1	80.5	76.4	280.3	234.7	170.5	129.9	97.7	73.5	69.5
57,5°	73.3	66.6	63.9	61.6	62.7	65.4	278.3	218.0	152.3	128.6	92.8	69.3	60.8
60,0°	48.6	47.2	42.4	46.5	48.7	49.2	272.7	199.4	130.1	119.1	83.8	65.0	57.4
62,5°	40.8	39.5	39.7	41.1	40.0	38.8	256.8	173.8	115.3	109.6	83.4	61.6	54.5
65,0°	37.1	33.9	37.3	36.9	36.5	33.5	258.2	159.9	96.1	94.2	81.3	61.6	46.5
67,5°	34.6	32.3	33.4	34.6	33.0	31.3	280.0	147.2	77.5	76.0	77.6	59.7	40.8
70,0°	32.0	32.4	30.4	31.7	27.2	29.4	247.6	108.4	58.8	62.7	73.3	58.4	38.2
72,5°	25.2	26.4	26.2	25.4	24.8	23.6	184.7	71.9	48.7	47.4	57.3	50.8	34.9
75,0°	18.7	17.1	18.0	18.7	18.1	18.1	95.7	27.7	25.4	34.3	36.0	34.8	26.3
77,5°	14.2	12.3	12.0	12.2	12.3	12.3	55.6	9.6	10.9	31.1	30.8	23.9	17.8
80,0°	9.5	8.8	8.8	7.5	7.9	7.8	31.0	5.8	8.6	24.2	22.9	16.0	10.4
82,5°	5.3	5.0	4.6	4.2	4.0	3.9	6.6	3.0	4.1	6.3	5.3	3.5	3.5
85,0°	2.4	2.0	1.4	1.5	1.4	1.5	1.1	1.0	1.1	0.9	0.9	0.9	0.8
87,5°	0.4	0.4	0.3	0.3	0.3	0.2	0.3	0.3	0.2	0.2	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless		Order number: 5XH7C41T08LA EAN: 4069025098467										LP number 59081_1873	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	0.4	0.4
2,5°	241.3	240.5	242.5	240.1	240.5	238.9	241.6	240.1	240.9	241.1	242.6	2.9	3.3
5,0°	232.5	230.0	225.5	221.8	226.5	227.3	225.3	224.8	224.3	223.2	221.9	5.8	9.1
7,5°	228.8	226.5	219.5	220.7	219.6	217.7	217.0	215.7	214.0	216.2	214.1	8.8	17.9
10,0°	221.8	216.9	211.2	208.7	206.8	206.5	210.1	210.0	211.5	208.9	215.3	11.8	29.6
12,5°	221.7	219.0	212.0	208.5	206.1	204.8	203.5	204.8	201.1	201.1	201.2	14.8	44.4
15,0°	211.3	207.1	204.4	200.9	196.2	194.7	186.5	183.8	185.7	182.0	180.8	17.4	61.9
17,5°	206.3	200.6	196.9	186.4	183.3	178.8	172.8	169.8	169.5	171.3	167.7	20.1	82.0
20,0°	201.6	192.2	182.0	171.8	168.4	169.4	161.9	159.0	152.8	148.9	148.7	22.6	104.6
22,5°	189.5	176.3	168.2	165.5	154.6	153.5	147.6	143.0	146.7	143.6	139.5	25.0	129.6
25,0°	184.5	169.4	158.8	149.7	145.1	148.3	144.2	138.2	133.4	130.4	128.2	27.4	157.0
27,5°	173.0	162.7	150.4	149.3	152.3	145.3	136.2	132.8	127.0	122.5	119.2	30.2	187.2
30,0°	162.4	143.6	144.2	152.2	146.6	139.1	131.5	121.9	116.8	109.9	110.0	32.9	220.1
32,5°	151.4	142.8	146.9	152.1	141.3	130.1	121.6	111.3	102.8	98.5	94.4	36.1	256.2
35,0°	140.7	148.0	157.5	143.3	130.4	119.8	107.6	101.9	94.1	89.2	89.6	39.0	295.2
37,5°	138.0	151.9	149.9	134.8	118.8	107.3	100.5	88.0	82.4	76.3	72.6	41.9	337.1
40,0°	134.4	154.1	135.3	122.6	107.1	94.1	82.6	75.7	70.2	69.0	67.6	44.8	381.9
42,5°	138.4	139.5	121.1	109.8	93.4	82.5	71.8	67.9	67.8	68.3	64.3	47.4	429.2
45,0°	135.6	129.0	109.2	95.4	84.3	74.3	65.8	66.7	65.5	64.6	65.4	48.8	478.1
47,5°	125.8	116.1	98.6	83.3	73.0	64.2	64.1	63.7	65.2	64.9	63.6	49.6	527.7
50,0°	107.6	99.0	88.5	78.2	64.9	64.1	63.1	62.8	63.9	65.5	68.4	50.0	577.6
52,5°	82.9	78.7	77.0	68.7	62.1	60.2	64.1	62.3	63.2	61.5	60.9	49.5	627.1
55,0°	64.7	64.0	67.3	59.9	58.1	58.2	61.6	60.8	61.2	59.8	60.3	48.5	675.6
57,5°	53.0	55.4	58.6	53.2	55.7	56.3	57.2	58.4	55.2	57.5	58.2	47.1	722.8
60,0°	49.5	48.0	49.5	47.1	48.3	48.9	50.3	49.9	51.1	50.6	52.4	45.5	768.2
62,5°	42.5	42.0	42.1	39.9	42.7	41.6	42.2	42.0	42.4	42.1	39.2	43.6	811.9
65,0°	40.5	35.1	38.1	36.5	35.7	35.7	33.2	31.9	31.9	30.6	32.6	41.7	853.6
67,5°	33.0	31.2	36.8	31.9	30.2	29.8	27.8	24.5	24.4	22.9	23.8	39.4	892.9
70,0°	29.7	26.8	31.6	27.6	24.7	23.0	20.2	19.4	17.5	17.6	16.9	35.6	928.5
72,5°	23.8	22.1	24.3	22.0	18.8	15.9	14.1	13.3	12.0	11.5	10.8	29.6	958.2
75,0°	17.8	15.2	17.8	16.9	13.4	11.6	9.2	7.4	6.2	5.9	5.9	21.6	979.7
77,5°	13.5	11.4	11.0	11.4	10.7	7.7	5.3	3.3	2.5	1.9	1.7	12.8	992.6
80,0°	7.9	5.9	6.5	6.2	5.3	4.4	3.9	1.5	1.0	0.8	0.8	5.5	998.1
82,5°	3.3	2.7	2.5	2.3	2.2	1.7	2.0	0.7	0.3	0.2	0.2	1.5	999.6
85,0°	0.6	0.6	0.5	0.4	0.2	0.2	0.2	0.1	0.0	0.1	0.1	0.3	999.9
87,5°	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7C41T08LA EAN: 4069025098467	LP number 59081_1873
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	13610	86.5	90.0	88.2
95	239	252	12920	81.3	84.5	82.9
90	225	250	12264	76.4	79.4	77.9
85	210	247	11549	71.2	74.0	72.6
80	196	245	10866	66.4	69.0	67.7
75	183	242	10222	62.0	64.3	63.2
70	169	239	9516	57.2	59.4	58.3
65	156	236	8851	52.8	54.8	53.8
60	143	233	8177	48.3	50.2	49.2
55	130	229	7489	43.9	45.6	44.8
50	117	226	6794	39.6	41.1	40.4
45	105	222	6140	35.6	36.9	36.2
40	92	217	5425	31.3	32.5	31.9
35	80	212	4756	27.5	28.5	28.0
30	68	206	4076	23.6	24.4	24.0
25	56	199	3390	19.8	20.5	20.2
20	44	190	2696	16.1	16.6	16.4
16	34	180	2111	12.8	13.3	13.0

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	13900	87.6	91.1	89.4
95	239	252	13186	82.3	85.6	83.9
90	225	250	12506	77.4	80.5	79.0
85	211	247	11816	72.5	75.4	74.0
80	197	245	11113	67.6	70.3	68.9
75	183	242	10401	62.8	65.2	64.0
70	170	239	9728	58.3	60.6	59.4
65	157	236	9047	53.9	55.9	54.9
60	144	233	8358	49.4	51.3	50.3
55	131	230	7655	44.8	46.6	45.7
50	118	226	6946	40.5	42.0	41.2
45	106	222	6282	36.5	37.8	37.2
40	93	217	5553	32.2	33.3	32.8
35	81	212	4874	28.2	29.2	28.7
30	69	206	4185	24.3	25.1	24.7
25	57	199	3489	20.5	21.1	20.8
20	45	191	2786	16.6	17.2	16.9
15	34	180	2134	13.0	13.5	13.2

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7C41T08LA EAN: 4069025098467	LP number 59081_1873
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	13770	87.1	90.5	88.8
95	239	252	13067	81.8	85.0	83.4
90	225	250	12398	76.9	79.9	78.4
85	211	247	11719	72.0	74.8	73.4
80	197	245	11025	67.2	69.8	68.5
75	183	242	10323	62.4	64.8	63.6
70	170	239	9657	57.9	60.2	59.0
65	156	236	8931	53.2	55.2	54.2
60	143	233	8249	48.6	50.6	49.6
55	130	229	7552	44.2	45.9	45.0
50	118	226	6904	40.2	41.7	41.0
45	105	222	6189	35.8	37.2	36.5
40	93	217	5522	31.9	33.0	32.4
35	80	212	4791	27.7	28.7	28.2
30	68	206	4105	23.8	24.6	24.2
25	57	199	3471	20.3	21.0	20.6
20	45	191	2773	16.5	17.1	16.8
15	34	180	2124	12.9	13.4	13.2

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7C41T08LA EAN: 4069025098467	LP number 59081_1873
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	13610.0	86.5
5.0	13900.0	87.6
15.0	13770.0	87.1