

Photometric test report

Family Streetlight 11 micro LED

Order number: 5XC1AC1Y08DE
EAN: 4069025078636

LP number
58065_239



Version	post-top or side-entry mounting
Optic	direct, asymmetric wide distribution S120001
Cover	transparent, PMMA
Lamps	LED 2700 K CRI ≥ 70
Controlgear	EVG SITECO iQ - Smart Interface
Setting	individual position
Rated values	Net luminous flux = 3320 lm Power consumption = 26.6 W Luminous efficacy = 124.8 lm/W

serial
documentation
25.04.2024

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 699 cd/klm

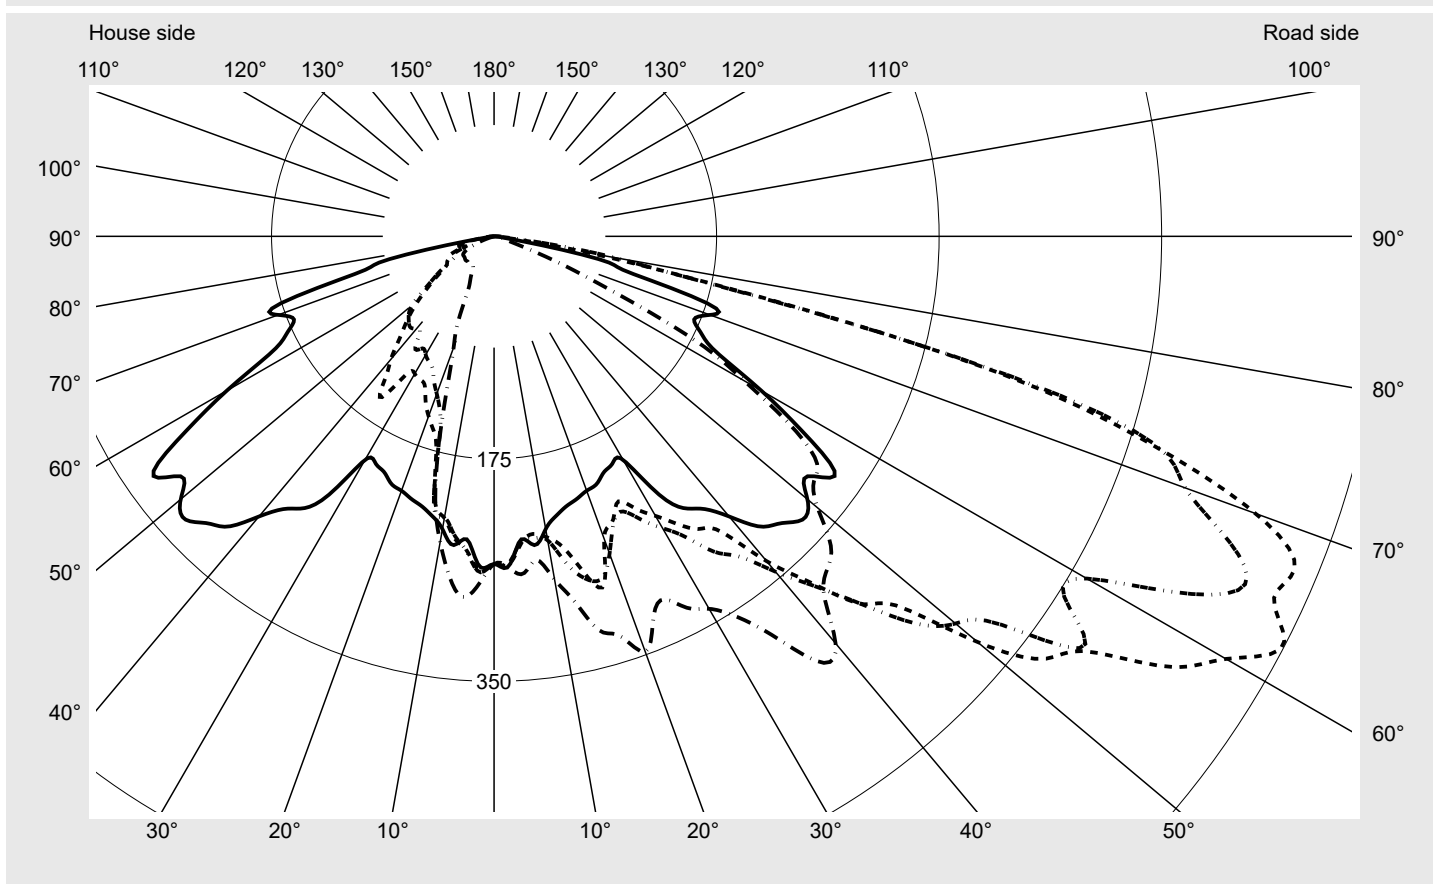

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	637.5
Imax 80°	98.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1Y08DE EAN: 4069025078636	LP number 58065_239
Envelope curve in cd/klm	KMK 62.5° KMK 60° KMK 57.5° KMK 55°	siteco

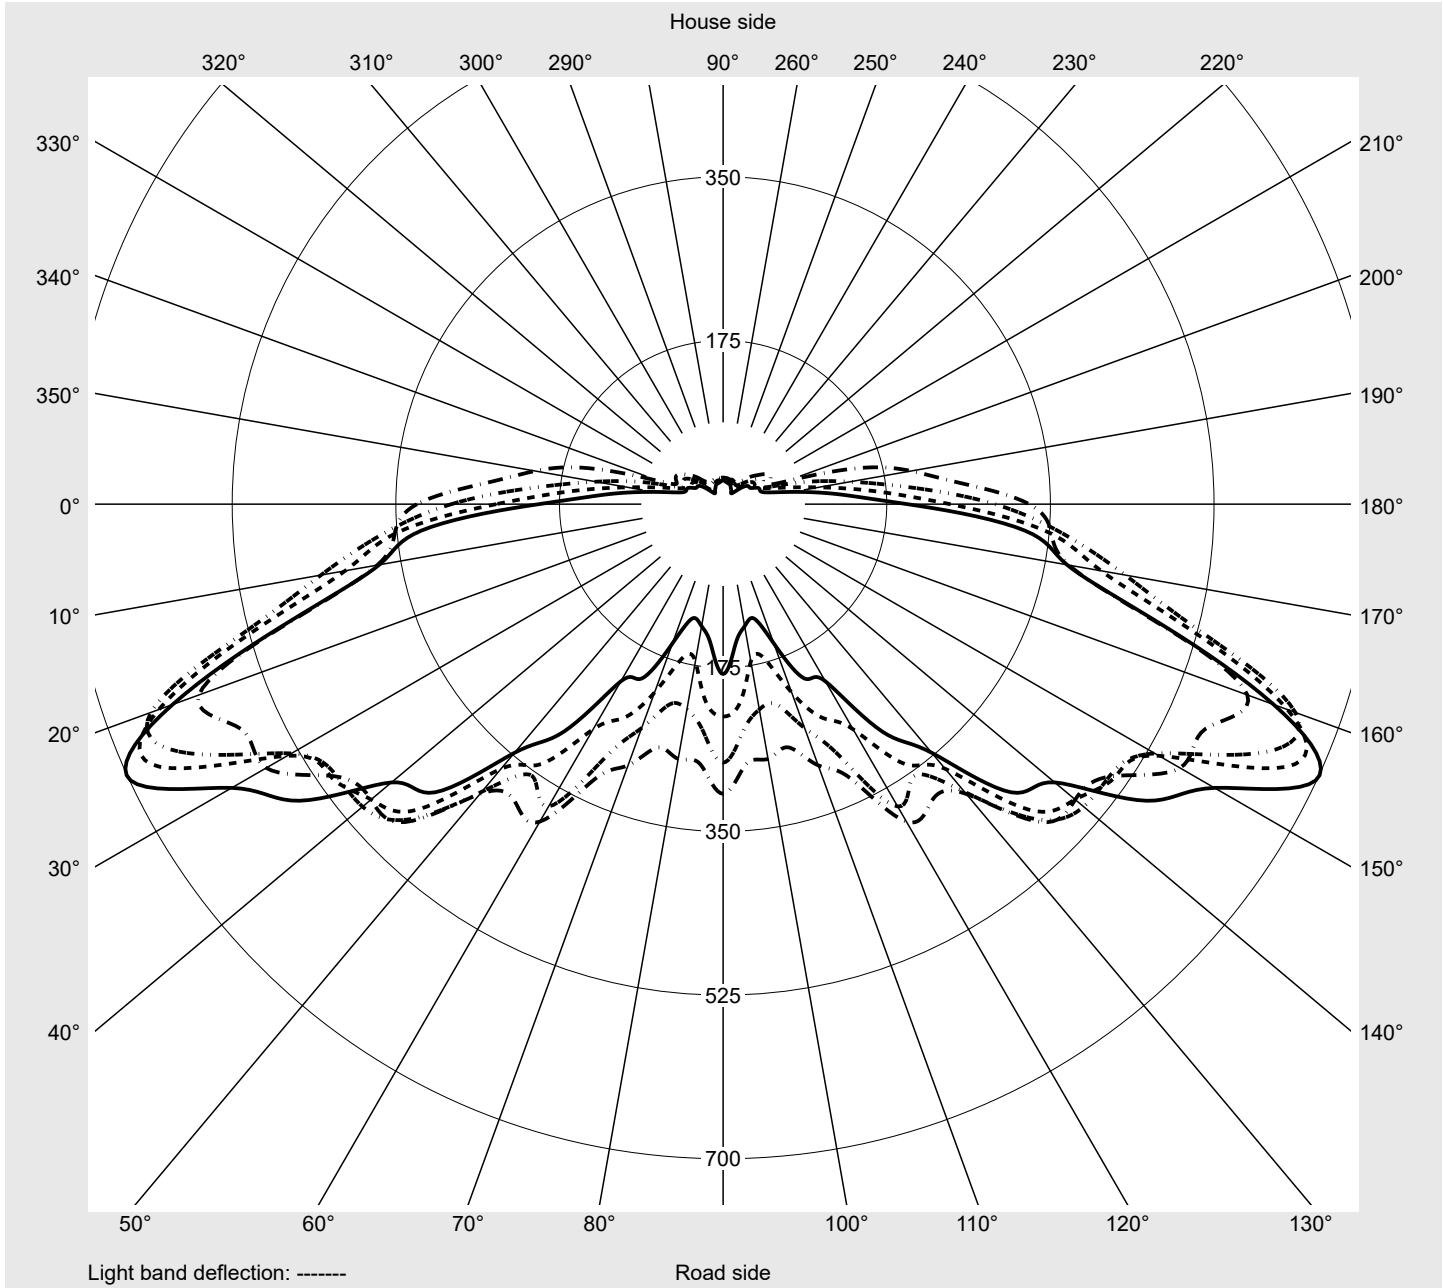

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1Y08DE EAN: 4069025078636	LP number 58065_239
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	259.9	259.7	259.7	260.1	259.7	258.6	257.4	255.7	253.8	253.3	252.7	252.9	253.7
5,0°	239.6	238.9	237.5	239.1	243.2	242.7	240.8	244.6	250.6	256.3	263.1	271.3	271.3
7,5°	244.9	242.1	235.6	230.9	228.8	236.0	239.4	250.8	256.3	259.9	254.4	255.2	258.8
10,0°	233.7	243.2	241.5	238.9	240.0	240.4	242.7	243.0	250.6	255.7	265.4	267.5	278.3
12,5°	225.2	233.7	239.6	245.3	250.1	250.4	263.7	271.5	263.5	263.7	272.0	275.3	277.7
15,0°	219.7	229.0	247.6	256.3	265.0	273.9	278.9	272.2	267.7	271.1	272.8	264.7	275.6
17,5°	216.5	223.5	248.2	257.8	271.3	287.6	282.1	276.8	264.1	264.7	264.1	271.1	270.1
20,0°	212.9	224.3	235.6	241.9	249.3	252.9	265.6	273.9	277.0	265.4	250.6	254.8	274.5
22,5°	210.8	219.3	222.6	234.7	239.4	243.0	245.1	248.3	255.4	253.7	253.7	262.2	262.4
25,0°	204.6	216.7	224.8	227.7	230.5	230.3	238.7	255.2	263.5	262.2	277.0	272.4	278.5
27,5°	201.5	215.0	216.5	224.8	233.7	241.5	251.4	261.8	265.4	279.6	301.0	305.2	312.8
30,0°	203.0	214.8	220.7	231.7	244.7	253.8	265.0	270.1	283.8	299.2	324.7	337.6	348.1
32,5°	240.0	235.6	234.5	235.3	252.5	268.3	280.4	287.4	312.2	327.0	350.0	360.2	381.1
35,0°	261.0	262.6	256.5	255.9	264.3	281.0	303.1	310.9	322.3	347.3	367.4	382.6	402.5
37,5°	270.1	279.4	281.0	280.8	282.5	292.3	317.5	330.6	342.0	366.8	377.3	417.6	423.1
40,0°	287.6	289.7	295.7	308.3	316.2	333.5	344.3	342.9	362.1	396.0	398.7	425.6	460.3
42,5°	309.6	310.1	306.5	320.6	345.6	369.9	373.1	366.5	370.1	405.9	409.7	424.1	463.7
45,0°	319.1	326.6	339.9	375.4	394.1	408.9	409.3	397.9	403.0	408.5	412.3	421.8	444.0
47,5°	329.5	324.9	325.9	392.6	432.8	430.2	451.0	434.1	450.1	424.7	412.7	419.2	439.1
50,0°	321.7	337.0	337.0	403.0	489.7	496.5	473.8	484.8	475.1	452.0	430.2	413.1	420.5
52,5°	310.1	321.7	346.7	404.6	507.5	545.8	500.9	473.0	508.8	459.5	427.7	416.3	397.2
55,0°	327.4	352.3	375.6	473.9	596.6	568.9	564.2	507.3	491.6	480.8	404.6	388.3	392.0
57,5°	290.6	365.3	436.7	530.2	651.2	630.3	533.1	505.4	503.3	477.0	401.5	355.3	373.3
60,0°	242.7	350.2	410.5	516.6	642.3	664.7	538.2	510.5	491.4	462.0	369.5	339.3	277.9
62,5°	197.0	323.8	373.5	476.4	626.6	699.2	606.8	553.0	462.9	435.8	347.1	297.1	218.8
65,0°	179.5	280.2	343.1	404.0	556.8	676.6	650.6	531.2	454.6	415.7	339.3	267.7	193.9
67,5°	170.4	253.6	315.8	366.1	567.4	681.7	625.0	497.3	409.1	364.7	296.5	241.5	173.8
70,0°	180.7	254.0	305.9	356.9	500.0	637.5	578.2	458.2	366.5	303.9	243.8	186.5	151.1
72,5°	177.1	253.8	262.9	340.7	417.3	539.9	545.4	397.0	317.0	272.8	193.0	154.3	144.8
75,0°	110.7	201.4	253.0	322.9	326.5	401.9	408.9	286.5	228.6	201.1	142.4	135.5	132.5
77,5°	88.0	125.7	156.6	239.2	175.9	190.1	183.1	164.0	125.9	136.7	94.4	91.6	91.9
80,0°	24.5	28.1	39.4	78.7	68.8	80.0	96.1	98.2	94.9	89.3	52.1	31.7	29.0
82,5°	5.9	6.6	7.8	9.5	12.1	17.6	35.1	52.1	44.2	29.6	19.5	15.7	12.1
85,0°	4.2	4.4	4.7	5.5	6.8	8.0	8.7	9.7	9.9	9.1	8.5	7.6	7.2
87,5°	2.7	2.7	3.0	3.4	3.8	4.6	4.7	5.1	5.3	4.9	4.6	4.2	3.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1Y08DE EAN: 4069025078636	LP number 58065_239
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	255.2	257.3	259.0	260.5	261.0	260.5	260.5	260.9	261.4	262.0	262.8	264.3	266.5
5,0°	271.1	267.7	264.7	264.1	266.0	266.2	241.5	243.6	246.1	247.0	247.8	248.5	247.0
7,5°	257.6	258.8	261.4	260.7	257.3	256.7	241.5	238.9	239.6	239.6	239.4	237.4	234.1
10,0°	278.1	274.7	268.3	265.0	270.1	274.1	225.6	221.4	223.7	228.4	224.8	224.5	220.5
12,5°	274.9	275.1	275.6	285.7	289.5	294.6	219.9	216.9	213.3	209.1	214.4	218.6	219.3
15,0°	280.8	283.8	297.3	315.8	317.9	321.1	215.7	202.3	195.1	186.0	175.7	167.2	166.3
17,5°	291.2	299.0	298.2	315.1	329.9	329.5	198.7	186.4	181.8	175.4	159.2	142.2	130.1
20,0°	271.3	289.1	297.8	313.2	341.0	347.7	199.8	181.6	168.9	161.5	150.5	131.8	120.4
22,5°	270.5	277.2	305.4	312.6	324.4	326.8	190.3	175.9	161.0	150.7	140.7	123.4	105.2
25,0°	282.8	301.6	307.7	314.7	328.2	315.1	190.9	167.2	157.3	140.3	129.1	114.5	102.6
27,5°	315.3	328.0	341.6	331.0	327.8	329.5	184.8	171.2	157.0	141.2	126.8	110.9	93.1
30,0°	362.3	355.3	351.3	350.0	344.3	338.2	189.8	175.4	158.7	140.1	124.7	107.5	87.6
32,5°	375.7	361.3	361.5	370.6	364.6	354.5	230.1	220.3	179.5	151.7	129.1	104.5	85.1
35,0°	399.3	383.3	385.8	390.0	393.9	384.1	253.1	241.5	199.8	175.5	154.7	108.1	82.5
37,5°	425.0	417.1	400.2	406.6	416.9	422.4	261.4	243.2	194.1	165.9	140.3	96.1	84.7
40,0°	456.3	428.4	401.5	377.8	394.5	417.8	293.1	265.8	201.9	175.2	126.3	94.8	88.7
42,5°	467.3	416.5	391.7	370.2	369.9	384.5	299.0	255.9	192.0	172.1	110.9	97.3	86.6
45,0°	479.8	431.7	387.1	364.9	366.5	370.4	313.6	262.0	196.8	154.1	99.2	94.8	89.7
47,5°	461.1	403.4	368.2	367.0	372.9	359.1	308.1	244.2	191.3	127.6	88.3	91.0	93.1
50,0°	420.3	371.2	331.2	323.8	346.4	332.1	295.6	240.4	177.4	103.5	76.8	84.0	77.5
52,5°	382.0	343.3	299.5	312.4	316.4	317.0	279.1	224.8	162.7	87.2	65.0	70.1	65.2
55,0°	324.2	297.3	269.2	276.6	279.2	309.8	255.9	204.2	148.4	70.5	54.8	58.4	55.9
57,5°	299.3	254.8	221.8	222.9	244.0	276.4	202.8	138.2	92.1	55.0	45.9	49.3	47.6
60,0°	252.3	214.2	171.2	170.8	212.1	227.1	161.3	103.5	68.4	49.7	42.7	39.6	40.0
62,5°	205.7	158.5	126.4	132.5	150.5	181.6	122.8	75.3	48.5	42.1	41.1	34.5	33.2
65,0°	152.2	108.4	88.3	87.6	107.1	106.9	112.6	58.0	45.9	38.3	38.1	32.4	33.0
67,5°	140.1	83.2	53.8	49.7	68.6	59.5	108.4	56.3	45.1	35.3	36.8	32.4	24.5
70,0°	131.4	69.2	38.1	24.1	29.0	25.4	106.4	59.1	44.9	35.6	29.6	24.1	22.2
72,5°	108.6	36.0	24.5	13.6	12.5	12.1	92.3	63.5	49.3	45.9	30.9	26.5	22.6
75,0°	79.2	24.6	15.2	10.4	9.3	9.1	63.1	60.5	59.0	37.2	30.1	28.4	20.1
77,5°	30.7	16.9	10.8	8.2	7.2	7.6	72.4	53.5	51.6	29.2	26.9	24.3	17.6
80,0°	16.3	11.4	7.8	6.1	5.3	5.3	20.5	23.7	21.0	16.1	15.7	17.3	18.6
82,5°	10.0	7.4	5.5	4.2	3.6	3.4	5.5	5.5	5.7	6.1	6.8	7.4	7.6
85,0°	5.7	4.4	3.0	2.3	1.9	1.9	3.8	3.6	3.6	3.8	4.0	3.6	3.6
87,5°	2.8	2.1	1.3	0.9	0.8	0.8	2.3	2.3	2.3	2.3	2.1	2.1	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1AC1Y08DE EAN: 4069025078636										LP number 58065_239	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	0.4	0.4
2,5°	268.8	270.9	274.5	277.0	277.5	276.0	273.9	274.7	275.5	274.3	273.7	3.1	3.5
5,0°	245.5	250.1	256.1	261.6	261.4	267.5	270.9	279.4	284.7	286.3	284.7	6.1	9.7
7,5°	229.8	233.2	242.3	242.1	245.1	253.5	255.9	257.4	260.5	266.2	269.6	8.9	18.5
10,0°	208.0	203.6	214.6	211.6	221.4	226.4	236.4	243.4	247.2	244.4	244.2	11.5	30.0
12,5°	218.2	195.3	193.7	187.1	184.6	196.0	205.9	219.7	225.4	218.2	213.5	14.1	44.1
15,0°	166.3	170.8	173.1	167.4	162.8	165.5	171.9	177.6	181.0	175.5	166.4	16.1	60.1
17,5°	130.1	136.5	137.8	132.1	125.5	138.0	139.5	135.7	127.4	120.4	120.2	17.5	77.7
20,0°	114.5	118.5	123.8	109.8	99.2	92.5	86.4	86.1	92.5	95.5	92.9	18.6	96.3
22,5°	98.6	102.2	108.4	91.0	83.2	76.0	72.0	70.3	67.1	66.0	76.2	19.6	115.9
25,0°	87.4	91.2	91.0	81.9	76.8	71.9	69.4	60.9	53.1	51.6	51.9	21.4	137.2
27,5°	79.8	70.7	64.8	63.9	60.3	61.2	59.7	49.3	45.7	42.8	41.3	23.6	160.9
30,0°	77.3	69.6	63.7	58.4	53.7	49.7	44.9	43.8	40.4	37.9	36.4	26.5	187.4
32,5°	73.4	67.5	62.2	54.8	46.3	41.1	38.3	36.0	34.9	33.0	31.5	30.2	217.6
35,0°	75.1	67.7	62.2	50.4	43.0	37.5	33.4	31.8	30.1	29.4	28.8	34.3	251.9
37,5°	76.4	67.1	59.0	49.3	42.7	37.2	31.5	29.4	28.2	28.4	28.1	38.0	289.8
40,0°	77.2	68.6	56.7	49.5	40.2	32.4	30.3	29.0	28.6	28.1	28.1	41.7	331.6
42,5°	79.4	66.0	57.6	47.2	39.6	33.2	29.0	29.0	28.4	28.4	29.2	44.5	376.1
45,0°	83.4	69.8	52.1	43.4	37.9	33.7	29.4	28.2	28.4	28.4	28.8	48.1	424.2
47,5°	81.1	61.8	48.2	40.0	35.6	32.8	29.4	28.2	28.4	28.2	28.8	50.5	474.7
50,0°	63.9	54.0	44.9	36.0	33.4	30.7	30.1	28.4	28.1	28.4	29.2	52.2	526.8
52,5°	56.1	48.5	38.3	32.0	29.8	30.3	29.4	28.6	28.1	29.4	28.8	52.9	579.7
55,0°	48.3	41.3	32.8	29.0	27.1	27.1	27.9	27.3	27.9	28.2	28.4	54.3	634.0
57,5°	40.2	33.0	27.3	24.5	25.0	25.8	26.4	26.7	27.9	27.7	28.4	53.7	687.7
60,0°	35.6	25.6	20.3	19.7	20.7	22.6	24.3	25.8	26.0	26.7	28.1	50.9	738.6
62,5°	29.4	21.2	15.5	14.8	17.3	19.3	22.0	22.7	23.5	24.5	25.8	48.0	786.6
65,0°	22.9	17.3	13.6	12.7	14.2	16.9	19.7	19.9	21.2	22.6	22.0	44.5	831.0
67,5°	20.5	15.5	12.5	11.2	11.9	13.6	15.2	15.5	16.3	15.9	15.5	41.4	872.4
70,0°	19.0	14.2	11.6	10.4	9.9	10.4	10.4	11.0	11.2	10.2	9.9	37.7	910.1
72,5°	16.9	12.7	9.9	8.7	8.0	8.0	7.6	7.2	7.0	4.2	3.8	33.7	943.8
75,0°	14.4	11.6	8.7	7.0	6.4	5.7	5.3	4.6	3.4	0.9	0.8	26.9	970.8
77,5°	11.6	8.5	6.8	5.7	4.7	4.4	3.4	4.0	1.9	0.8	0.4	16.9	987.6
80,0°	13.1	7.2	4.9	4.2	3.4	2.8	2.7	2.8	1.3	0.4	0.4	7.8	995.4
82,5°	6.6	4.9	3.8	3.0	2.7	1.9	1.5	1.5	0.8	0.4	0.4	2.8	998.2
85,0°	3.2	2.7	1.9	1.7	1.5	1.1	0.9	0.8	0.4	0.4	0.4	1.2	999.4
87,5°	1.7	1.5	1.3	0.9	0.9	0.8	0.8	0.4	0.4	0.4	0.4	0.7	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1Y08DE EAN: 4069025078636	LP number 58065_239
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	3320	26.6	27.2	26.9
95	241	252	3150	25.1	25.6	25.4
90	229	250	2993	23.7	24.2	24.0
85	216	248	2823	22.2	22.7	22.4
80	203	246	2653	20.8	21.2	21.0
75	190	243	2483	19.3	19.8	19.6
70	178	241	2327	18.1	18.4	18.2
65	165	238	2157	16.8	17.1	17.0
60	152	235	1987	15.5	15.8	15.6
55	140	232	1830	14.3	14.5	14.4
50	127	229	1660	12.9	13.2	13.0
45	114	225	1490	11.6	11.8	11.7
40	102	221	1333	10.4	10.6	10.5
35	89	216	1163	9.2	9.4	9.3
30	76	210	993	7.9	8.0	8.0
25	63	203	823	6.7	6.8	6.8
20	51	195	667	5.6	5.7	5.6
15	38	184	497	4.5	4.5	4.5
10	25	169	327	3.4	3.4	3.4
9	23	166	301	3.3	3.3	3.3