

Photometric test report

Family

Streetlight 11 mini LED



Order number: 5XC2BC1F08GE

EAN: 4069025076595

LP number

59338_408

serial documentation

25.04.2024

Version

post-top or side-entry mounting

Optic

asymmetric, extremely wide distribution (ST0.5a)

Cover

transparent, PMMA

Lamps

LED 4000 K | CRI ≥ 70

Controlgear

ECG SITECO iQ

Setting

individual position


Rated values

Net luminous flux = 3690 lm

Power consumption = 23.7 W

Luminous efficacy = 155.7 lm/W


siteco

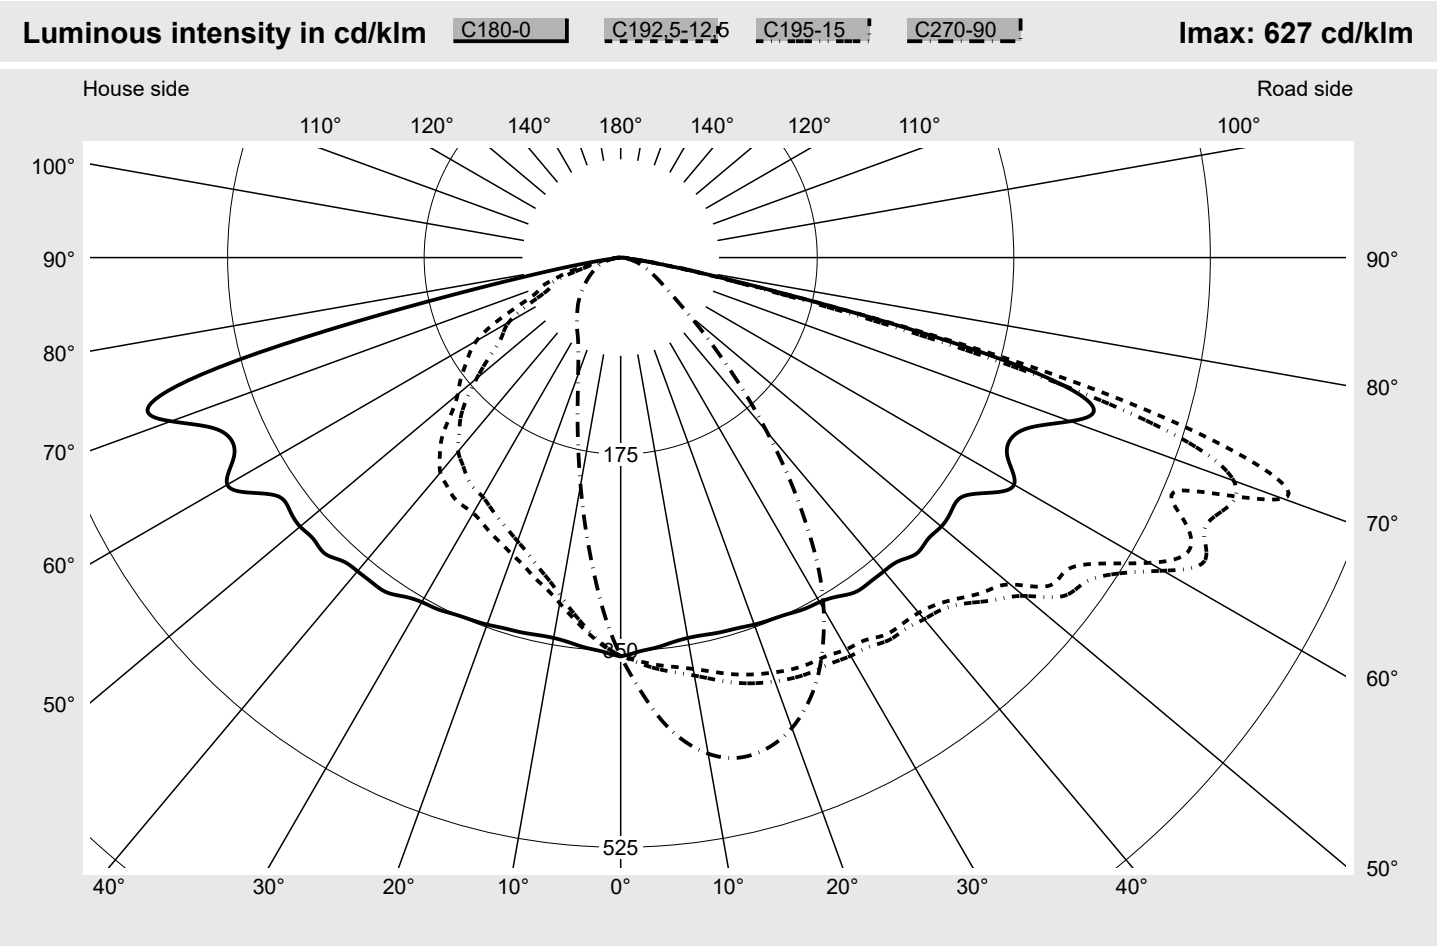

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	627.5
Eta 90° - 180°	0.0%	Imax 80°	70.6
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2BC1F08GE EAN: 4069025076595	LP number 59338_408
Envelope curve in cd/klm KMK 70° KMK 67.5° KMK 65° KMK 62.5°		sit eco

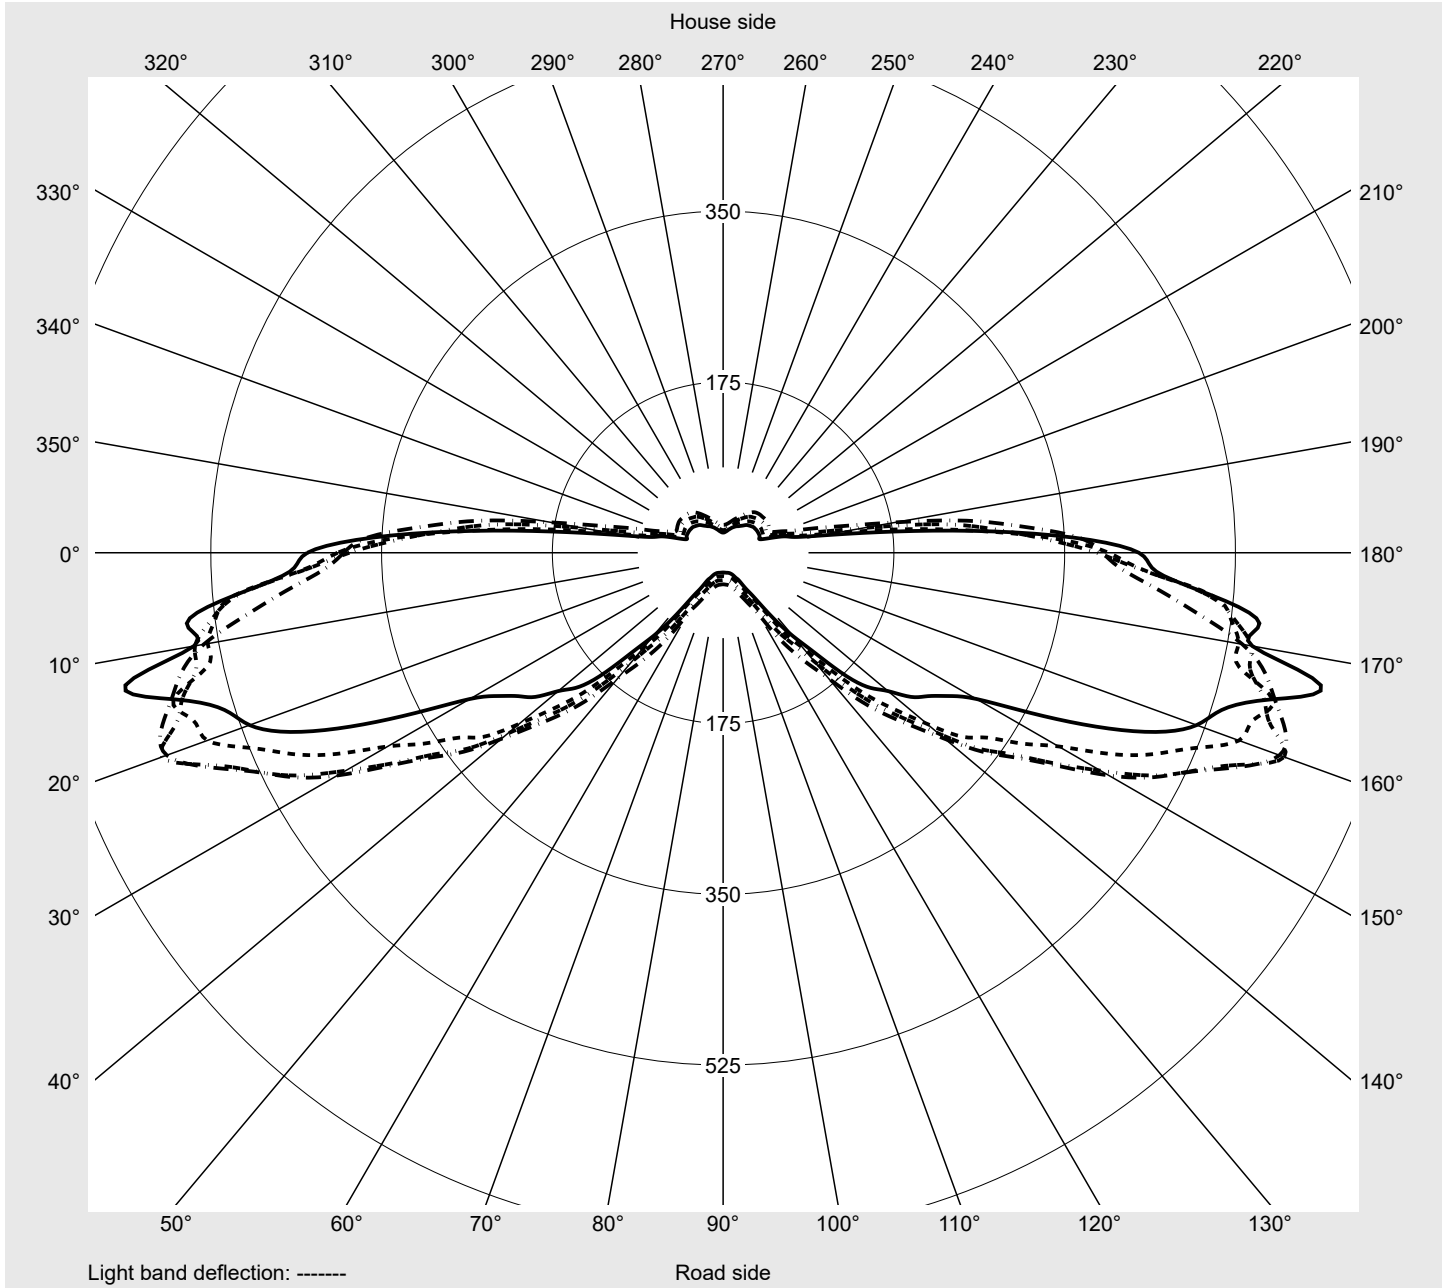

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2BC1F08GE EAN: 4069025076595	LP number 59338_408
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	351.4	352.5	353.9	355.6	357.6	359.5	361.3	363.0	364.7	366.2	367.7	369.0	370.2	371.3	372.1
5,0°	348.9	351.4	354.1	356.9	360.4	363.9	367.4	370.5	373.3	376.1	378.9	381.4	383.7	386.0	388.2
7,5°	345.8	349.9	353.9	358.1	362.8	367.6	372.5	376.7	380.9	384.7	388.3	391.8	394.9	398.1	401.0
10,0°	343.9	349.5	354.8	360.2	366.0	371.9	377.8	383.3	388.2	392.8	397.0	400.9	404.6	408.4	411.6
12,5°	344.1	351.1	357.8	364.1	370.8	377.7	384.7	390.7	396.2	401.1	405.6	409.8	413.7	417.5	420.9
15,0°	345.2	354.0	361.7	368.8	376.4	384.0	391.8	398.4	404.4	409.7	414.4	418.6	422.4	426.1	429.4
17,5°	346.0	355.9	364.6	372.8	380.9	389.2	397.4	404.5	411.2	416.8	421.8	426.0	430.1	433.7	436.8
20,0°	347.7	358.7	368.2	376.5	385.1	393.3	401.5	409.0	415.8	421.3	426.1	430.2	433.9	437.4	440.2
22,5°	348.9	361.4	371.2	380.1	388.6	396.9	404.8	412.0	418.8	424.3	428.6	432.1	435.0	437.6	439.8
25,0°	350.4	363.3	373.7	382.5	390.9	398.7	406.5	413.3	419.5	424.4	428.6	431.9	434.0	436.1	437.7
27,5°	352.9	365.9	376.2	384.4	392.1	399.5	407.0	413.8	419.9	424.9	428.2	430.6	432.0	432.8	432.9
30,0°	354.2	367.9	378.8	387.7	395.7	402.6	409.5	415.3	420.2	423.9	426.8	428.7	429.5	429.0	427.5
32,5°	358.0	371.5	382.4	390.4	397.6	404.1	411.0	417.3	422.7	425.9	427.3	427.3	425.9	423.9	421.1
35,0°	363.7	377.0	387.3	395.7	403.4	410.2	415.9	419.9	422.5	425.1	426.9	427.3	425.5	420.1	413.9
37,5°	364.3	377.7	389.3	398.9	406.3	411.4	416.7	422.4	427.3	429.7	428.0	423.2	419.2	416.0	409.9
40,0°	364.6	378.1	389.8	399.3	406.4	412.9	420.3	425.6	426.9	424.4	422.6	422.1	420.2	411.6	398.9
42,5°	366.5	379.9	392.5	403.5	411.2	418.3	424.5	427.4	427.0	426.9	425.5	419.9	411.2	402.8	395.4
45,0°	372.6	385.7	398.3	410.3	420.6	428.5	435.3	438.7	439.0	436.5	431.8	423.9	412.3	400.5	384.3
47,5°	371.0	387.0	402.4	416.3	428.2	440.2	451.2	458.3	456.0	448.1	441.4	430.6	417.1	403.2	383.6
50,0°	372.6	387.9	404.4	420.9	436.1	452.8	468.6	473.6	471.1	465.5	456.1	442.1	421.8	402.4	379.2
52,5°	371.0	392.3	409.5	430.5	456.6	480.2	495.4	494.1	483.8	477.1	468.3	454.5	432.5	408.2	381.1
55,0°	371.3	393.3	411.6	428.4	456.6	484.9	504.4	511.3	506.2	496.1	482.6	462.3	434.6	408.8	385.8
57,5°	389.7	406.7	435.2	459.5	484.3	507.0	523.8	528.6	523.9	504.5	487.9	466.5	436.1	403.9	376.6
60,0°	404.5	420.8	453.9	486.2	524.6	543.5	557.6	571.4	566.2	534.5	502.7	479.6	451.2	407.2	372.6
62,5°	388.9	410.8	450.0	494.0	540.4	568.8	585.8	603.9	606.7	573.4	530.7	498.0	456.4	406.2	365.9
65,0°	383.0	433.0	499.0	529.1	549.6	553.2	573.4	588.6	612.0	568.5	529.6	494.3	446.7	401.4	359.8
67,5°	395.1	434.6	503.0	525.1	536.3	541.9	583.3	569.7	562.5	522.9	487.9	446.4	396.9	364.2	330.4
70,0°	426.1	444.5	503.1	554.4	550.7	627.5	580.9	535.8	516.4	479.9	421.6	355.7	299.7	273.3	256.2
72,5°	440.7	442.5	505.1	561.0	554.6	570.8	505.6	448.7	436.3	393.6	315.4	246.7	202.7	179.6	161.8
75,0°	353.4	353.2	367.5	449.0	400.5	388.9	318.4	282.4	270.2	255.8	213.4	173.4	150.4	138.4	122.7
77,5°	153.0	205.1	206.9	212.1	170.9	150.7	128.2	120.2	120.9	126.0	124.3	112.0	102.4	92.8	76.5
80,0°	50.0	70.6	61.8	49.7	44.1	45.7	58.2	61.5	58.1	51.4	54.3	52.5	46.8	41.2	34.1
82,5°	10.3	10.3	10.4	10.8	11.5	13.2	15.9	13.6	14.2	12.7	13.7	12.2	11.3	10.9	10.4
85,0°	6.2	6.3	6.4	6.4	6.4	6.4	6.4	6.3	6.2	6.0	5.9	5.7	5.5	5.4	5.2
87,5°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2BC1F08GE EAN: 4069025076595	LP number 59338_408
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	373.1	374.3	375.4	376.3	377.2	378.1	379.2	380.1	380.9	381.5	382.2	382.5	382.8	382.9	383.1
5,0°	390.2	392.4	394.6	396.6	398.4	400.1	401.9	403.5	405.1	406.4	407.6	408.5	409.2	409.8	410.4
7,5°	404.0	406.9	409.7	412.2	414.6	416.9	419.1	421.3	423.2	424.9	426.4	427.7	428.8	429.8	430.6
10,0°	414.9	418.2	421.3	424.0	426.6	429.1	431.5	433.9	436.1	437.9	439.7	441.0	442.4	443.6	444.7
12,5°	424.3	427.4	430.5	433.3	435.8	438.1	440.3	442.4	444.3	446.0	447.5	448.9	450.3	451.4	452.5
15,0°	432.4	434.9	437.5	439.7	441.8	443.6	445.2	446.8	448.1	449.4	450.5	451.4	452.3	453.3	454.4
17,5°	439.5	441.5	443.0	444.1	445.2	446.1	446.6	447.3	448.0	448.5	449.2	449.5	450.0	450.5	451.1
20,0°	442.5	444.2	445.6	446.4	446.6	446.3	445.8	445.0	444.4	444.0	443.7	443.5	443.5	443.4	443.5
22,5°	441.4	442.5	443.3	443.5	443.4	442.7	441.4	439.7	437.6	435.5	433.9	432.7	431.7	431.0	430.4
25,0°	438.0	437.9	437.5	436.5	435.5	434.2	432.2	429.5	426.4	423.1	420.1	417.5	415.6	414.3	413.1
27,5°	432.0	430.3	428.5	426.4	423.9	421.2	418.0	414.1	409.6	404.9	400.8	397.1	394.1	391.8	390.3
30,0°	424.3	421.1	417.3	413.5	409.4	404.7	400.0	394.2	388.3	382.2	377.1	372.6	369.0	366.0	364.1
32,5°	416.4	411.0	405.2	399.1	392.4	385.5	378.5	371.0	363.7	356.4	349.8	343.8	339.5	336.4	333.7
35,0°	407.1	399.5	391.2	383.1	374.4	365.2	355.9	345.6	336.1	326.9	318.7	311.6	305.8	301.1	297.7
37,5°	398.9	387.2	377.6	368.5	357.6	345.6	333.3	320.6	309.2	297.8	288.0	279.8	272.8	266.4	261.4
40,0°	388.6	377.7	363.4	350.5	338.1	323.8	309.4	294.9	281.7	269.4	258.6	248.9	240.1	232.1	225.1
42,5°	379.2	360.5	347.3	333.0	315.9	301.4	286.9	272.2	257.8	244.2	231.8	220.1	209.5	200.4	192.6
45,0°	365.4	350.4	331.0	312.4	298.3	281.2	265.0	248.4	233.3	218.4	204.6	191.6	180.5	170.9	162.5
47,5°	362.9	340.3	318.3	301.3	276.8	261.3	243.9	225.2	209.7	194.5	180.2	167.1	155.9	146.2	137.3
50,0°	358.5	332.7	308.1	282.4	259.1	239.4	221.4	202.3	184.7	169.9	156.6	144.4	133.2	123.0	113.7
52,5°	352.1	321.5	295.1	264.4	238.8	217.9	199.1	178.1	159.4	147.4	136.2	124.6	113.4	103.0	93.8
55,0°	356.2	320.6	284.5	247.5	219.6	197.7	175.7	154.3	140.6	126.9	117.0	105.7	94.7	84.5	75.9
57,5°	347.0	311.5	276.9	244.0	214.2	192.1	163.1	139.5	125.2	111.5	98.1	87.0	76.7	67.7	60.7
60,0°	344.3	308.6	273.8	243.2	217.0	186.5	153.9	129.8	113.3	97.9	80.8	69.3	60.8	53.8	48.7
62,5°	334.9	296.8	262.4	233.7	202.4	168.2	143.9	121.9	98.3	72.4	61.5	53.8	47.9	43.2	39.6
65,0°	329.6	288.2	251.2	219.6	182.4	145.9	118.5	99.9	75.6	58.4	48.8	42.7	38.2	34.9	32.5
67,5°	310.0	272.8	237.0	203.4	161.9	127.5	103.9	68.6	52.6	43.6	38.1	34.0	30.6	28.2	26.6
70,0°	242.7	220.5	205.0	179.0	139.2	111.9	84.9	57.0	44.3	33.6	29.5	26.4	24.1	22.8	21.9
72,5°	159.0	155.2	154.1	140.7	110.4	96.1	59.4	43.8	33.2	25.7	21.4	19.6	18.8	18.2	17.8
75,0°	105.3	97.6	92.3	83.4	66.5	53.3	32.1	32.0	22.5	17.9	16.4	15.4	14.7	14.3	14.2
77,5°	63.0	57.1	49.0	45.4	40.8	27.8	21.4	19.6	14.2	13.3	12.6	12.0	11.5	11.1	10.9
80,0°	26.2	24.3	22.6	17.3	14.0	13.2	14.1	12.7	10.2	9.6	9.2	8.8	8.5	8.3	7.9
82,5°	9.1	8.7	8.5	7.7	7.5	7.3	7.0	6.8	6.6	6.4	6.2	6.0	5.8	5.7	5.4
85,0°	5.1	5.1	4.9	4.8	4.6	4.5	4.3	4.1	3.8	3.6	3.3	3.2	3.1	3.1	3.1
87,5°	2.6	2.6	2.6	2.5	2.4	2.4	2.3	2.1	2.0	1.9	1.7	1.6	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2BC1F08GE EAN: 4069025076595	LP number 59338_408
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	383.3	383.7	383.9	384.1	384.4	384.6	384.6	350.3	349.1	348.2	347.1	346.3	345.3	344.5	343.4
5,0°	410.9	411.5	412.0	412.5	412.8	412.9	413.0	345.8	343.2	340.5	337.9	335.3	332.8	330.2	327.6
7,5°	431.5	432.2	432.9	433.5	433.8	434.1	434.2	341.3	336.8	332.3	327.9	323.8	319.6	315.5	311.4
10,0°	445.6	446.5	447.2	447.9	448.2	448.4	448.5	337.4	331.0	324.7	318.4	312.5	306.3	300.4	294.5
12,5°	453.6	454.4	455.1	455.7	456.0	456.3	456.4	335.6	327.3	319.0	310.7	302.7	294.3	286.4	278.5
15,0°	455.0	456.0	456.7	457.1	457.5	457.8	457.9	334.9	325.0	315.1	304.9	295.3	284.9	275.3	265.6
17,5°	451.8	452.6	453.0	453.5	453.8	454.1	454.2	334.1	322.2	310.6	298.8	287.4	275.8	264.6	253.7
20,0°	443.6	443.9	444.5	444.9	445.2	445.6	445.7	334.7	321.0	307.6	294.2	281.6	268.7	256.5	244.3
22,5°	430.4	430.2	430.5	431.0	431.5	431.9	432.2	334.3	319.4	304.8	289.9	276.2	262.3	249.2	235.9
25,0°	412.3	412.0	412.1	412.5	413.1	413.6	413.9	334.9	318.3	302.2	286.3	271.6	256.6	242.5	228.4
27,5°	389.1	388.4	388.2	388.5	389.1	389.7	389.7	335.8	318.1	300.0	282.3	266.5	251.0	235.8	220.2
30,0°	362.6	361.1	360.4	360.3	361.0	361.4	361.4	336.2	317.0	297.2	278.7	262.7	245.9	229.2	212.9
32,5°	331.4	329.3	327.8	327.2	327.3	327.6	327.5	339.9	318.9	297.4	278.0	261.8	243.4	224.7	206.7
35,0°	294.4	291.3	289.0	287.7	287.2	286.8	286.5	345.0	322.6	299.4	278.5	259.9	238.5	217.9	200.2
37,5°	257.2	253.2	250.0	247.8	246.4	245.4	244.8	344.9	321.1	295.9	274.5	255.0	231.6	210.9	194.7
40,0°	219.8	215.0	210.8	207.3	204.9	203.3	202.6	346.8	318.7	290.9	270.8	249.9	225.0	206.1	189.9
42,5°	186.1	180.1	174.7	170.2	167.0	165.0	164.3	344.6	311.6	282.4	262.5	238.4	213.1	196.7	175.7
45,0°	154.9	147.6	141.1	135.8	132.3	130.1	129.4	351.4	311.5	280.5	256.6	224.4	201.5	183.0	155.7
47,5°	128.9	120.9	114.0	108.3	104.6	102.5	101.8	346.0	301.3	268.4	238.5	203.9	185.9	156.3	131.4
50,0°	105.2	97.1	90.4	85.0	81.7	79.9	79.4	347.9	301.8	263.6	223.8	189.5	167.3	133.0	118.1
52,5°	85.4	77.8	72.0	67.7	65.4	64.0	63.6	341.1	290.7	250.0	209.8	180.0	149.3	122.3	106.1
55,0°	68.5	62.2	57.8	55.1	53.6	52.7	52.4	340.1	283.3	239.2	197.9	169.5	132.8	111.5	89.8
57,5°	54.8	50.5	47.5	45.8	44.9	44.2	44.1	358.4	294.5	241.3	192.4	159.8	123.7	100.2	78.5
60,0°	45.0	42.0	40.1	39.0	38.4	37.9	37.7	372.1	308.5	252.4	192.2	148.3	114.8	84.3	72.6
62,5°	37.1	35.2	33.9	33.2	32.8	32.5	32.4	363.9	307.8	251.7	179.4	126.8	96.8	75.1	64.4
65,0°	30.8	29.6	29.0	28.6	28.4	28.1	28.0	328.8	277.9	223.9	145.5	98.0	76.2	64.3	53.4
67,5°	25.7	25.1	24.7	24.4	24.2	24.0	23.9	338.6	259.4	184.3	115.3	80.8	67.7	56.0	47.4
70,0°	21.4	21.0	20.8	20.6	20.4	20.3	20.2	358.6	257.2	162.1	101.4	74.6	64.8	49.8	40.4
72,5°	17.4	17.2	17.1	16.9	16.7	16.6	16.6	335.2	240.6	184.7	112.8	59.2	46.1	34.5	33.5
75,0°	14.0	13.8	13.7	13.5	13.3	13.3	13.2	268.1	215.0	161.6	101.7	45.0	29.4	26.2	27.3
77,5°	10.7	10.5	10.3	10.2	9.9	9.8	9.6	138.3	134.3	95.9	50.4	21.9	19.1	19.8	21.0
80,0°	7.6	7.4	7.2	7.0	6.9	6.8	6.7	61.0	45.2	28.8	25.5	18.3	12.8	13.6	14.7
82,5°	5.1	4.9	4.7	4.6	4.5	4.4	4.3	10.1	9.2	8.6	8.2	7.8	7.8	8.1	8.4
85,0°	3.0	2.8	2.7	2.6	2.5	2.4	2.3	5.8	5.8	5.6	5.3	5.1	4.9	4.7	4.5
87,5°	1.2	1.2	1.2	1.1	1.0	0.9	0.9	3.2	3.1	3.0	2.9	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2BC1F08GE EAN: 4069025076595	LP number 59338_408
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	342.5	341.5	340.5	339.1	337.4	335.7	334.2	333.3	332.3	331.4	330.5	329.4	328.5	327.5	326.8
5,0°	325.2	322.7	320.1	317.2	314.2	311.3	308.6	306.2	304.0	301.8	299.7	297.6	295.6	293.7	292.1
7,5°	307.3	303.1	299.0	294.8	290.5	286.4	282.4	278.9	275.6	272.4	269.2	266.2	263.4	260.7	258.3
10,0°	288.8	283.1	277.6	272.1	266.4	261.3	256.3	251.6	247.3	243.1	239.1	235.3	231.8	228.5	225.6
12,5°	270.9	263.5	256.3	249.3	242.5	236.1	230.1	224.6	219.5	214.6	210.0	205.8	201.9	198.1	194.8
15,0°	256.2	247.1	238.2	229.8	221.8	214.1	207.0	200.5	194.6	189.1	184.1	179.6	175.5	171.6	168.2
17,5°	242.8	232.1	222.1	212.4	203.1	194.9	186.7	179.3	172.6	166.6	161.1	156.3	152.1	148.3	145.1
20,0°	232.3	220.5	209.5	198.9	188.8	179.4	170.6	162.6	155.2	148.6	142.8	137.9	133.7	129.9	126.9
22,5°	223.1	210.7	198.7	187.2	176.5	166.6	157.2	148.6	140.6	133.7	127.8	122.8	118.7	115.2	112.5
25,0°	214.6	201.5	189.2	177.7	166.4	156.2	146.2	137.0	128.7	121.7	115.8	111.2	107.4	104.2	101.7
27,5°	205.6	192.2	179.7	168.0	156.2	145.4	135.3	126.5	118.5	111.7	106.2	101.9	98.6	95.9	93.6
30,0°	197.6	183.5	170.6	158.0	145.8	135.1	125.3	117.2	110.1	104.0	99.1	95.2	92.3	90.0	88.0
32,5°	190.9	175.8	161.1	147.6	135.5	125.3	116.7	109.3	102.9	97.5	93.3	90.1	87.6	85.4	83.6
35,0°	184.2	167.1	151.0	137.2	125.8	116.5	108.6	102.0	96.5	92.1	88.8	86.1	83.9	81.9	80.1
37,5°	178.0	158.9	141.7	128.8	117.5	108.5	101.3	96.0	92.0	88.6	86.0	83.7	81.7	79.6	77.7
40,0°	168.5	147.7	133.5	120.8	109.3	101.0	95.4	91.6	88.5	85.9	83.8	81.8	79.8	77.8	75.7
42,5°	151.9	136.6	124.1	109.6	99.9	94.9	91.3	88.4	86.1	84.2	82.4	80.6	78.5	76.2	73.9
45,0°	137.3	124.8	108.5	97.2	92.9	90.1	87.6	85.7	84.1	82.6	81.0	79.0	76.8	74.4	72.0
47,5°	120.4	105.9	94.1	90.1	87.6	85.5	83.9	82.8	81.9	80.6	79.1	77.1	75.1	72.4	69.7
50,0°	102.4	88.1	84.3	82.5	81.2	80.4	80.1	79.8	79.0	78.0	76.5	74.7	72.4	69.7	67.0
52,5°	86.3	80.5	77.4	76.1	75.5	75.5	75.7	75.9	75.7	74.9	73.2	71.5	69.3	66.8	64.0
55,0°	79.7	74.5	71.4	69.9	69.4	69.9	70.5	70.9	71.1	70.7	69.6	68.0	65.7	63.2	60.5
57,5°	71.0	65.7	62.1	62.4	63.4	64.7	65.3	65.7	65.8	65.4	64.9	63.9	62.0	59.6	56.8
60,0°	65.2	58.1	56.9	57.6	58.6	59.4	60.0	60.2	60.2	60.2	60.0	59.2	57.8	55.5	52.8
62,5°	55.7	53.1	53.3	54.1	54.7	55.3	55.3	55.0	54.6	54.4	54.1	53.4	52.4	50.5	48.3
65,0°	49.2	48.7	49.3	50.1	50.9	51.3	51.1	50.6	50.1	49.3	48.4	47.3	46.5	44.9	43.2
67,5°	44.8	45.1	45.3	45.8	46.1	46.2	46.0	45.7	45.0	44.1	43.0	42.0	40.5	38.9	37.7
70,0°	40.2	41.1	41.3	41.4	41.4	41.2	40.9	40.7	39.9	39.0	38.1	37.1	35.4	33.9	32.6
72,5°	34.5	36.1	36.6	36.6	36.5	36.4	36.0	35.3	34.8	34.4	33.6	32.2	30.8	29.4	28.3
75,0°	28.8	30.2	30.9	31.3	31.4	31.4	31.3	30.8	30.3	30.0	29.2	28.0	26.7	25.5	24.4
77,5°	22.6	23.8	24.8	25.3	25.5	25.8	26.0	25.8	25.6	25.8	25.0	24.0	22.8	21.7	20.6
80,0°	15.8	16.8	17.7	18.5	19.0	19.2	19.2	19.2	19.4	20.1	19.8	19.2	18.4	17.6	16.9
82,5°	8.9	9.3	9.8	10.6	11.3	11.8	12.0	12.1	12.1	12.5	13.0	13.0	12.9	12.7	12.5
85,0°	4.4	4.3	4.2	4.0	3.9	3.8	3.8	3.9	4.0	4.2	4.6	5.0	5.5	5.9	6.2
87,5°	2.6	2.4	2.3	2.3	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2BC1F08GE EAN: 4069025076595	LP number 59338_408
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	0.5	0.5
2,5°	326.1	325.4	324.7	324.0	323.3	322.7	322.1	321.6	320.9	320.4	320.0	319.8	319.7	4.2	4.8
5,0°	290.4	289.0	287.5	286.3	285.1	284.0	283.0	282.1	281.2	280.5	279.9	279.6	279.4	8.3	13.1
7,5°	255.9	253.8	251.8	250.0	248.3	246.8	245.5	244.3	243.3	242.4	241.8	241.4	241.3	12.2	25.3
10,0°	222.7	220.1	217.7	215.5	213.5	211.8	210.3	209.0	207.9	207.0	206.4	206.1	205.9	15.9	41.3
12,5°	191.7	189.1	186.5	184.1	182.1	180.3	178.7	177.3	176.3	175.4	174.8	174.5	174.5	19.4	60.6
15,0°	165.0	162.3	159.8	157.6	155.6	153.8	152.3	151.1	150.1	149.3	148.8	148.5	148.4	22.6	83.3
17,5°	142.0	139.5	137.2	135.2	133.4	131.9	130.5	129.4	128.5	127.8	127.3	127.0	127.0	25.7	108.9
20,0°	124.1	121.9	119.9	118.1	116.6	115.3	114.1	113.1	112.4	111.8	111.3	111.0	110.9	28.5	137.4
22,5°	110.0	108.0	106.2	104.7	103.4	102.3	101.3	100.4	99.7	99.1	98.8	98.6	98.5	31.1	168.5
25,0°	99.6	97.9	96.3	94.9	93.7	92.7	91.8	91.1	90.5	89.9	89.6	89.4	89.3	33.4	201.9
27,5°	91.6	90.1	88.7	87.4	86.3	85.4	84.5	83.8	83.3	82.9	82.5	82.3	82.3	35.4	237.3
30,0°	86.2	84.6	83.2	81.9	80.9	80.0	79.3	78.6	78.0	77.6	77.3	77.1	77.1	37.0	274.3
32,5°	81.9	80.5	79.1	77.9	76.7	75.6	74.8	74.1	73.4	72.9	72.7	72.5	72.5	38.3	312.7
35,0°	78.4	76.8	75.4	74.1	72.9	71.7	70.7	69.7	69.0	68.4	68.1	67.9	67.8	39.3	352.0
37,5°	75.9	74.1	72.5	70.9	69.5	68.2	67.0	66.0	65.2	64.5	64.1	63.9	63.8	39.9	391.9
40,0°	73.5	71.5	69.7	67.9	66.2	64.7	63.3	62.2	61.4	60.7	60.2	60.0	59.8	40.2	432.1
42,5°	71.4	69.2	67.1	65.0	63.0	61.4	60.0	58.7	57.8	57.1	56.6	56.3	56.2	40.3	472.4
45,0°	69.3	66.9	64.3	62.0	59.8	58.0	56.4	55.0	54.1	53.3	52.8	52.4	52.3	40.4	512.8
47,5°	66.8	64.1	61.4	58.8	56.5	54.5	52.9	51.6	50.5	49.5	49.0	48.6	48.5	40.4	553.2
50,0°	64.0	61.2	58.2	55.7	53.2	51.1	49.3	47.8	46.6	45.7	45.0	44.7	44.6	40.4	593.6
52,5°	61.0	58.0	55.2	52.5	50.1	48.0	46.1	44.4	43.1	42.1	41.4	41.1	41.0	40.5	634.2
55,0°	57.7	54.8	51.9	49.3	46.9	44.9	42.9	41.3	40.0	38.9	38.2	37.8	37.7	40.5	674.7
57,5°	53.9	51.2	48.5	46.0	43.8	41.6	39.8	38.2	36.9	35.8	35.0	34.6	34.4	41.1	715.7
60,0°	49.9	47.3	44.9	42.7	40.5	38.5	36.7	35.1	33.8	32.7	32.0	31.6	31.4	42.3	758.0
62,5°	45.9	43.4	41.1	39.0	37.1	35.3	33.5	32.0	30.7	29.8	29.1	28.7	28.6	42.5	800.6
65,0°	41.1	39.3	37.6	35.6	33.7	32.2	30.6	29.2	28.1	27.0	26.4	26.0	26.0	41.7	842.2
67,5°	36.4	35.0	33.5	32.1	30.6	29.2	27.8	26.5	25.5	24.5	23.8	23.4	23.2	39.6	881.8
70,0°	31.4	30.7	29.7	28.6	27.5	26.2	25.0	23.9	22.8	21.9	21.2	20.8	20.7	37.3	919.1
72,5°	27.4	26.5	25.6	24.9	24.0	23.0	22.0	20.8	19.8	19.0	18.4	17.9	17.9	32.6	951.7
75,0°	23.4	22.5	21.6	20.8	20.2	19.4	18.5	17.6	16.7	15.9	15.3	14.9	14.7	24.1	975.8
77,5°	19.7	18.9	18.0	17.2	16.4	15.7	15.2	14.3	13.5	12.8	12.1	11.8	11.7	13.5	989.3
80,0°	16.1	15.3	14.5	13.7	13.0	12.3	11.5	10.8	10.0	9.4	8.8	8.4	8.3	6.3	995.6
82,5°	12.1	11.6	11.2	10.6	9.8	9.1	8.2	7.4	6.7	6.3	5.8	5.6	5.5	2.5	998.2
85,0°	6.4	6.4	6.4	6.3	6.0	5.4	4.8	4.2	3.7	3.3	2.9	2.0	2.5	1.3	999.4
87,5°	1.3	1.2	1.2	1.2	1.3	1.4	1.3	1.3	1.1	0.8	0.5	0.3	0.3	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2BC1F08GE EAN: 4069025076595	LP number 59338_408
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	3690	23.7	24.3	24.0
95	241	252	3501	22.4	23.1	22.8
90	229	250	3327	21.3	21.9	21.6
85	216	248	3138	20.0	20.6	20.3
80	203	246	2949	18.9	19.4	19.2
75	190	243	2760	17.7	18.2	18.0
70	178	241	2586	16.5	17.0	16.8
65	165	238	2397	15.4	15.8	15.6
60	152	235	2208	14.3	14.6	14.4
55	140	232	2034	13.1	13.5	13.3
50	127	229	1845	12.0	12.3	12.2
45	114	225	1656	10.9	11.1	11.0
40	102	221	1482	9.9	10.2	10.0
35	89	216	1293	8.8	9.0	8.9
30	76	210	1104	7.7	7.9	7.8
25	63	203	915	6.6	6.8	6.7
20	51	195	741	5.6	5.8	5.7
15	38	184	552	4.6	4.7	4.6
13	33	179	479	4.1	4.2	4.2