


Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1G08DE EAN: 4069025078599	LP number 58065_263
	Version	post-top or side-entry mounting
	Optic	direct, asymmetric wide distribution S120001
	Cover	transparent, PMMA
	Lamps	LED 2700 K CRI ≥ 70
	Controlgear	ECG SITECO iQ
	Setting	individual position
	Rated values	Net luminous flux = 3320 lm Power consumption = 26.8 W Luminous efficacy = 123.9 lm/W
		serial documentation 22.05.2024
		

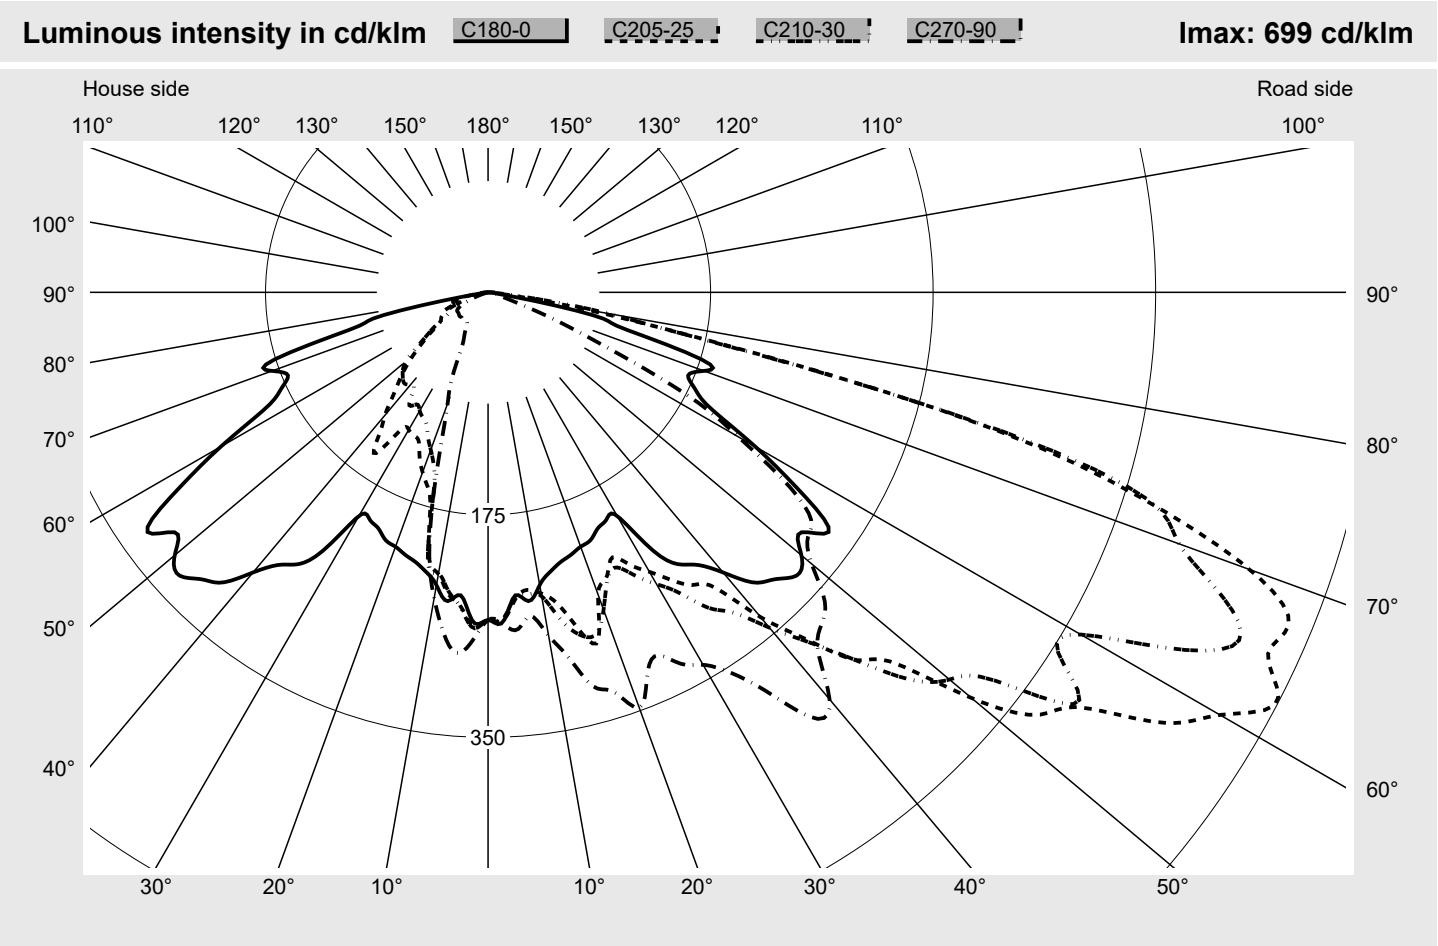

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	637.5
Eta 90° - 180°	0.0%	Imax 80°	98.2
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Streetlight 11 micro LED

Order number: **5XC1AC1G08DE**
EAN: **4069025078599**

LP number
58065_263

Envelope curve in cd/klm


KMK 62.5°

KMK 60°

KMK 57.5°

KMK 55°

siteco

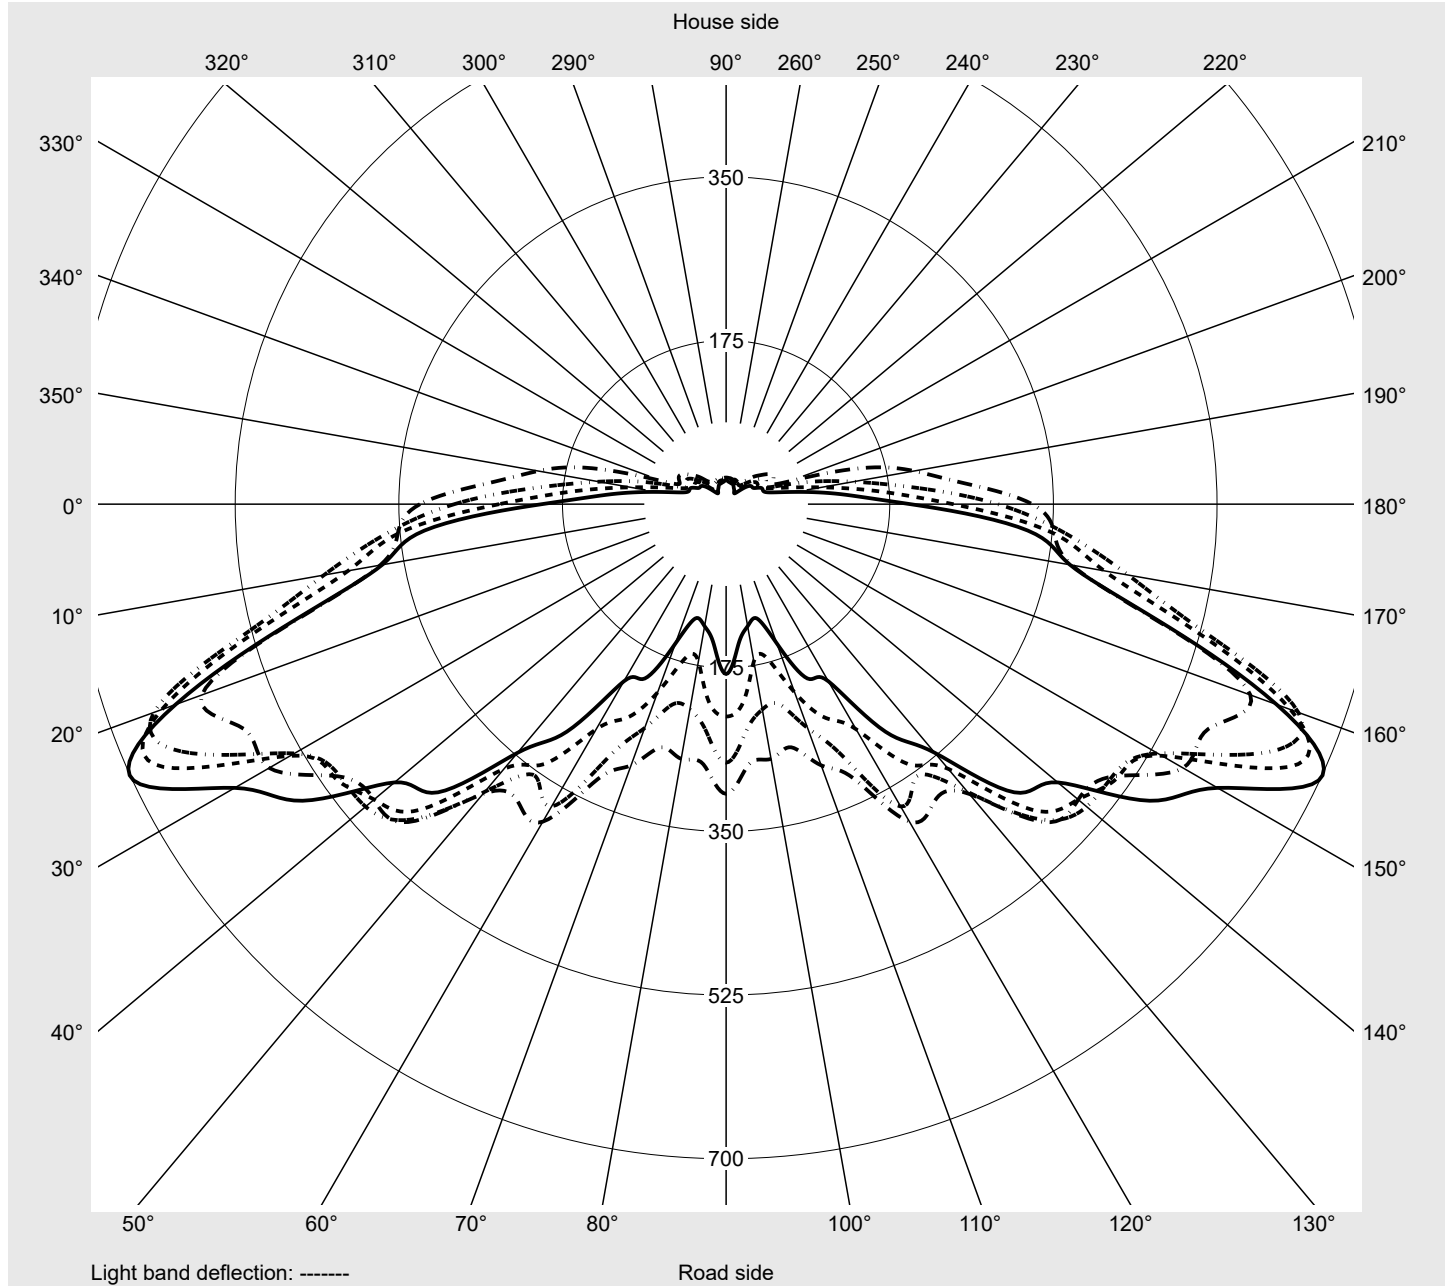

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1G08DE EAN: 4069025078599	LP number 58065_263
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	259.9	259.7	259.7	260.1	259.7	258.6	257.4	255.7	253.8	253.3	252.7	252.9	253.7
5,0°	239.6	238.9	237.5	239.1	243.2	242.7	240.8	244.6	250.6	256.3	263.1	271.3	271.3
7,5°	244.9	242.1	235.6	230.9	228.8	236.0	239.4	250.8	256.3	259.9	254.4	255.2	258.8
10,0°	233.7	243.2	241.5	238.9	240.0	240.4	242.7	243.0	250.6	255.7	265.4	267.5	278.3
12,5°	225.2	233.7	239.6	245.3	250.1	250.4	263.7	271.5	263.5	263.7	272.0	275.3	277.7
15,0°	219.7	229.0	247.6	256.3	265.0	273.9	278.9	272.2	267.7	271.1	272.8	264.7	275.6
17,5°	216.5	223.5	248.2	257.8	271.3	287.6	282.1	276.8	264.1	264.7	264.1	271.1	270.1
20,0°	212.9	224.3	235.6	241.9	249.3	252.9	265.6	273.9	277.0	265.4	250.6	254.8	274.5
22,5°	210.8	219.3	222.6	234.7	239.4	243.0	245.1	248.3	255.4	253.7	253.7	262.2	262.4
25,0°	204.6	216.7	224.8	227.7	230.5	230.3	238.7	255.2	263.5	262.2	277.0	272.4	278.5
27,5°	201.5	215.0	216.5	224.8	233.7	241.5	251.4	261.8	265.4	279.6	301.0	305.2	312.8
30,0°	203.0	214.8	220.7	231.7	244.7	253.8	265.0	270.1	283.8	299.2	324.7	337.6	348.1
32,5°	240.0	235.6	234.5	235.3	252.5	268.3	280.4	287.4	312.2	327.0	350.0	360.2	381.1
35,0°	261.0	262.6	256.5	255.9	264.3	281.0	303.1	310.9	322.3	347.3	367.4	382.6	402.5
37,5°	270.1	279.4	281.0	280.8	282.5	292.3	317.5	330.6	342.0	366.8	377.3	417.6	423.1
40,0°	287.6	289.7	295.7	308.3	316.2	333.5	344.3	342.9	362.1	396.0	398.7	425.6	460.3
42,5°	309.6	310.1	306.5	320.6	345.6	369.9	373.1	366.5	370.1	405.9	409.7	424.1	463.7
45,0°	319.1	326.6	339.9	375.4	394.1	408.9	409.3	397.9	403.0	408.5	412.3	421.8	444.0
47,5°	329.5	324.9	325.9	392.6	432.8	430.2	451.0	434.1	450.1	424.7	412.7	419.2	439.1
50,0°	321.7	337.0	337.0	403.0	489.7	496.5	473.8	484.8	475.1	452.0	430.2	413.1	420.5
52,5°	310.1	321.7	346.7	404.6	507.5	545.8	500.9	473.0	508.8	459.5	427.7	416.3	397.2
55,0°	327.4	352.3	375.6	473.9	596.6	568.9	564.2	507.3	491.6	480.8	404.6	388.3	392.0
57,5°	290.6	365.3	436.7	530.2	651.2	630.3	533.1	505.4	503.3	477.0	401.5	355.3	373.3
60,0°	242.7	350.2	410.5	516.6	642.3	664.7	538.2	510.5	491.4	462.0	369.5	339.3	277.9
62,5°	197.0	323.8	373.5	476.4	626.6	699.2	606.8	553.0	462.9	435.8	347.1	297.1	218.8
65,0°	179.5	280.2	343.1	404.0	556.8	676.6	650.6	531.2	454.6	415.7	339.3	267.7	193.9
67,5°	170.4	253.6	315.8	366.1	567.4	681.7	625.0	497.3	409.1	364.7	296.5	241.5	173.8
70,0°	180.7	254.0	305.9	356.9	500.0	637.5	578.2	458.2	366.5	303.9	243.8	186.5	151.1
72,5°	177.1	253.8	262.9	340.7	417.3	539.9	545.4	397.0	317.0	272.8	193.0	154.3	144.8
75,0°	110.7	201.4	253.0	322.9	326.5	401.9	408.9	286.5	228.6	201.1	142.4	135.5	132.5
77,5°	88.0	125.7	156.6	239.2	175.9	190.1	183.1	164.0	125.9	136.7	94.4	91.6	91.9
80,0°	24.5	28.1	39.4	78.7	68.8	80.0	96.1	98.2	94.9	89.3	52.1	31.7	29.0
82,5°	5.9	6.6	7.8	9.5	12.1	17.6	35.1	52.1	44.2	29.6	19.5	15.7	12.1
85,0°	4.2	4.4	4.7	5.5	6.8	8.0	8.7	9.7	9.9	9.1	8.5	7.6	7.2
87,5°	2.7	2.7	3.0	3.4	3.8	4.6	4.7	5.1	5.3	4.9	4.6	4.2	3.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1G08DE EAN: 4069025078599	LP number 58065_263
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	255.2	257.3	259.0	260.5	261.0	260.5	260.5	260.9	261.4	262.0	262.8	264.3	266.5
5,0°	271.1	267.7	264.7	264.1	266.0	266.2	241.5	243.6	246.1	247.0	247.8	248.5	247.0
7,5°	257.6	258.8	261.4	260.7	257.3	256.7	241.5	238.9	239.6	239.6	239.4	237.4	234.1
10,0°	278.1	274.7	268.3	265.0	270.1	274.1	225.6	221.4	223.7	228.4	224.8	224.5	220.5
12,5°	274.9	275.1	275.6	285.7	289.5	294.6	219.9	216.9	213.3	209.1	214.4	218.6	219.3
15,0°	280.8	283.8	297.3	315.8	317.9	321.1	215.7	202.3	195.1	186.0	175.7	167.2	166.3
17,5°	291.2	299.0	298.2	315.1	329.9	329.5	198.7	186.4	181.8	175.4	159.2	142.2	130.1
20,0°	271.3	289.1	297.8	313.2	341.0	347.7	199.8	181.6	168.9	161.5	150.5	131.8	120.4
22,5°	270.5	277.2	305.4	312.6	324.4	326.8	190.3	175.9	161.0	150.7	140.7	123.4	105.2
25,0°	282.8	301.6	307.7	314.7	328.2	315.1	190.9	167.2	157.3	140.3	129.1	114.5	102.6
27,5°	315.3	328.0	341.6	331.0	327.8	329.5	184.8	171.2	157.0	141.2	126.8	110.9	93.1
30,0°	362.3	355.3	351.3	350.0	344.3	338.2	189.8	175.4	158.7	140.1	124.7	107.5	87.6
32,5°	375.7	361.3	361.5	370.6	364.6	354.5	230.1	220.3	179.5	151.7	129.1	104.5	85.1
35,0°	399.3	383.3	385.8	390.0	393.9	384.1	253.1	241.5	199.8	175.5	154.7	108.1	82.5
37,5°	425.0	417.1	400.2	406.6	416.9	422.4	261.4	243.2	194.1	165.9	140.3	96.1	84.7
40,0°	456.3	428.4	401.5	377.8	394.5	417.8	293.1	265.8	201.9	175.2	126.3	94.8	88.7
42,5°	467.3	416.5	391.7	370.2	369.9	384.5	299.0	255.9	192.0	172.1	110.9	97.3	86.6
45,0°	479.8	431.7	387.1	364.9	366.5	370.4	313.6	262.0	196.8	154.1	99.2	94.8	89.7
47,5°	461.1	403.4	368.2	367.0	372.9	359.1	308.1	244.2	191.3	127.6	88.3	91.0	93.1
50,0°	420.3	371.2	331.2	323.8	346.4	332.1	295.6	240.4	177.4	103.5	76.8	84.0	77.5
52,5°	382.0	343.3	299.5	312.4	316.4	317.0	279.1	224.8	162.7	87.2	65.0	70.1	65.2
55,0°	324.2	297.3	269.2	276.6	279.2	309.8	255.9	204.2	148.4	70.5	54.8	58.4	55.9
57,5°	299.3	254.8	221.8	222.9	244.0	276.4	202.8	138.2	92.1	55.0	45.9	49.3	47.6
60,0°	252.3	214.2	171.2	170.8	212.1	227.1	161.3	103.5	68.4	49.7	42.7	39.6	40.0
62,5°	205.7	158.5	126.4	132.5	150.5	181.6	122.8	75.3	48.5	42.1	41.1	34.5	33.2
65,0°	152.2	108.4	88.3	87.6	107.1	106.9	112.6	58.0	45.9	38.3	38.1	32.4	33.0
67,5°	140.1	83.2	53.8	49.7	68.6	59.5	108.4	56.3	45.1	35.3	36.8	32.4	24.5
70,0°	131.4	69.2	38.1	24.1	29.0	25.4	106.4	59.1	44.9	35.6	29.6	24.1	22.2
72,5°	108.6	36.0	24.5	13.6	12.5	12.1	92.3	63.5	49.3	45.9	30.9	26.5	22.6
75,0°	79.2	24.6	15.2	10.4	9.3	9.1	63.1	60.5	59.0	37.2	30.1	28.4	20.1
77,5°	30.7	16.9	10.8	8.2	7.2	7.6	72.4	53.5	51.6	29.2	26.9	24.3	17.6
80,0°	16.3	11.4	7.8	6.1	5.3	5.3	20.5	23.7	21.0	16.1	15.7	17.3	18.6
82,5°	10.0	7.4	5.5	4.2	3.6	3.4	5.5	5.5	5.7	6.1	6.8	7.4	7.6
85,0°	5.7	4.4	3.0	2.3	1.9	1.9	3.8	3.6	3.6	3.8	4.0	3.6	3.6
87,5°	2.8	2.1	1.3	0.9	0.8	0.8	2.3	2.3	2.3	2.3	2.1	2.1	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family				Order number: 5XC1AC1G08DE								LP number			
Streetlight 11 micro LED				EAN: 4069025078599								58065_263			
Table of values for luminous intensities												Maximum luminous intensity		siteco	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	0.4	0.4		
2,5°	268.8	270.9	274.5	277.0	277.5	276.0	273.9	274.7	275.5	274.3	273.7	3.1	3.5		
5,0°	245.5	250.1	256.1	261.6	261.4	267.5	270.9	279.4	284.7	286.3	284.7	6.1	9.7		
7,5°	229.8	233.2	242.3	242.1	245.1	253.5	255.9	257.4	260.5	266.2	269.6	8.9	18.5		
10,0°	208.0	203.6	214.6	211.6	221.4	226.4	236.4	243.4	247.2	244.4	244.2	11.5	30.0		
12,5°	218.2	195.3	193.7	187.1	184.6	196.0	205.9	219.7	225.4	218.2	213.5	14.1	44.1		
15,0°	166.3	170.8	173.1	167.4	162.8	165.5	171.9	177.6	181.0	175.5	166.4	16.1	60.1		
17,5°	130.1	136.5	137.8	132.1	125.5	138.0	139.5	135.7	127.4	120.4	120.2	17.5	77.7		
20,0°	114.5	118.5	123.8	109.8	99.2	92.5	86.4	86.1	92.5	95.5	92.9	18.6	96.3		
22,5°	98.6	102.2	108.4	91.0	83.2	76.0	72.0	70.3	67.1	66.0	76.2	19.6	115.9		
25,0°	87.4	91.2	91.0	81.9	76.8	71.9	69.4	60.9	53.1	51.6	51.9	21.4	137.2		
27,5°	79.8	70.7	64.8	63.9	60.3	61.2	59.7	49.3	45.7	42.8	41.3	23.6	160.9		
30,0°	77.3	69.6	63.7	58.4	53.7	49.7	44.9	43.8	40.4	37.9	36.4	26.5	187.4		
32,5°	73.4	67.5	62.2	54.8	46.3	41.1	38.3	36.0	34.9	33.0	31.5	30.2	217.6		
35,0°	75.1	67.7	62.2	50.4	43.0	37.5	33.4	31.8	30.1	29.4	28.8	34.3	251.9		
37,5°	76.4	67.1	59.0	49.3	42.7	37.2	31.5	29.4	28.2	28.4	28.1	38.0	289.8		
40,0°	77.2	68.6	56.7	49.5	40.2	32.4	30.3	29.0	28.6	28.1	28.1	41.7	331.6		
42,5°	79.4	66.0	57.6	47.2	39.6	33.2	29.0	29.0	28.4	28.4	29.2	44.5	376.1		
45,0°	83.4	69.8	52.1	43.4	37.9	33.7	29.4	28.2	28.4	28.4	28.8	48.1	424.2		
47,5°	81.1	61.8	48.2	40.0	35.6	32.8	29.4	28.2	28.4	28.2	28.8	50.5	474.7		
50,0°	63.9	54.0	44.9	36.0	33.4	30.7	30.1	28.4	28.1	28.4	29.2	52.2	526.8		
52,5°	56.1	48.5	38.3	32.0	29.8	30.3	29.4	28.6	28.1	29.4	28.8	52.9	579.7		
55,0°	48.3	41.3	32.8	29.0	27.1	27.1	27.9	27.3	27.9	28.2	28.4	54.3	634.0		
57,5°	40.2	33.0	27.3	24.5	25.0	25.8	26.4	26.7	27.9	27.7	28.4	53.7	687.7		
60,0°	35.6	25.6	20.3	19.7	20.7	22.6	24.3	25.8	26.0	26.7	28.1	50.9	738.6		
62,5°	29.4	21.2	15.5	14.8	17.3	19.3	22.0	22.7	23.5	24.5	25.8	48.0	786.6		
65,0°	22.9	17.3	13.6	12.7	14.2	16.9	19.7	19.9	21.2	22.6	22.0	44.5	831.0		
67,5°	20.5	15.5	12.5	11.2	11.9	13.6	15.2	15.5	16.3	15.9	15.5	41.4	872.4		
70,0°	19.0	14.2	11.6	10.4	9.9	10.4	10.4	11.0	11.2	10.2	9.9	37.7	910.1		
72,5°	16.9	12.7	9.9	8.7	8.0	8.0	7.6	7.2	7.0	4.2	3.8	33.7	943.8		
75,0°	14.4	11.6	8.7	7.0	6.4	5.7	5.3	4.6	3.4	0.9	0.8	26.9	970.8		
77,5°	11.6	8.5	6.8	5.7	4.7	4.4	3.4	4.0	1.9	0.8	0.4	16.9	987.6		
80,0°	13.1	7.2	4.9	4.2	3.4	2.8	2.7	2.8	1.3	0.4	0.4	7.8	995.4		
82,5°	6.6	4.9	3.8	3.0	2.7	1.9	1.5	1.5	0.8	0.4	0.4	2.8	998.2		
85,0°	3.2	2.7	1.9	1.7	1.5	1.1	0.9	0.8	0.4	0.4	0.4	1.2	999.4		
87,5°	1.7	1.5	1.3	0.9	0.9	0.8	0.8	0.4	0.4	0.4	0.4	0.7	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1AC1G08DE EAN: 4069025078599	LP number 58065_263
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	3320	26.8	27.3	27.0
95	241	252	3150	25.2	25.7	25.4
90	229	250	2993	23.8	24.3	24.0
85	216	248	2823	22.3	22.8	22.6
80	203	246	2653	20.9	21.3	21.1
75	190	243	2483	19.4	19.8	19.6
70	178	241	2327	18.1	18.5	18.3
65	165	238	2157	16.7	17.1	16.9
60	152	235	1987	15.4	15.7	15.6
55	140	232	1830	14.2	14.4	14.3
50	127	229	1660	12.9	13.1	13.0
45	114	225	1490	11.7	11.8	11.8
40	102	221	1333	10.4	10.6	10.5
35	89	216	1163	9.3	9.5	9.4
30	76	210	993	8.1	8.2	8.1
25	63	203	823	6.9	7.0	7.0
20	51	195	667	5.9	6.0	6.0
15	38	184	497	4.9	4.9	4.9
13	34	180	444	4.5	4.6	4.6