

Photometric test report

Family
Streetlight 11 micro LED



Order number: 5XC1BC1F08DE
EAN: 4069025076359

Version

Optic

Cover

Lamps

Controlgear

Setting

Rated values

post-top or side-entry mounting

asymmetric, extremely wide distribution (ST0.5a)

transparent, PMMA

LED 3000 K | CRI ≥ 70

ECG SITECO iQ


factory setting

Net luminous flux = 3590 lm
Power consumption = 27.7 W
Luminous efficacy = 129.6 lm/W

LP number
59318_212

serial
documentation
22.05.2024


siteco

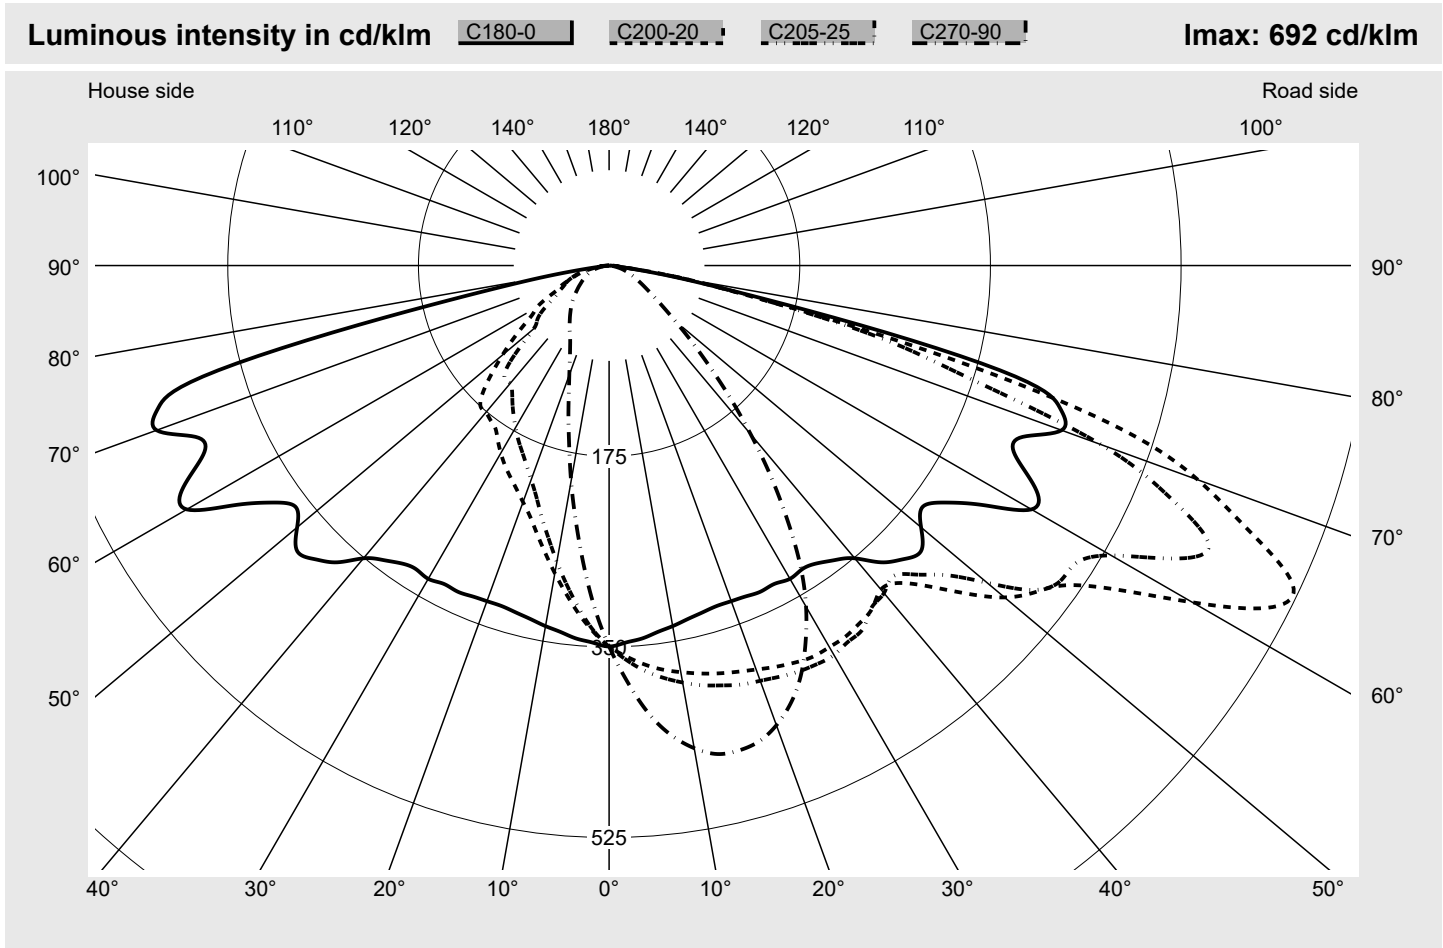

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	625.9
Eta 90° - 180°	0.0%	Imax 80°	83.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1BC1F08DE EAN: 4069025076359	LP number 59318_212
Envelope curve in cd/klm KMK 65° KMK 62.5° KMK 60° KMK 57.5°		sit eco

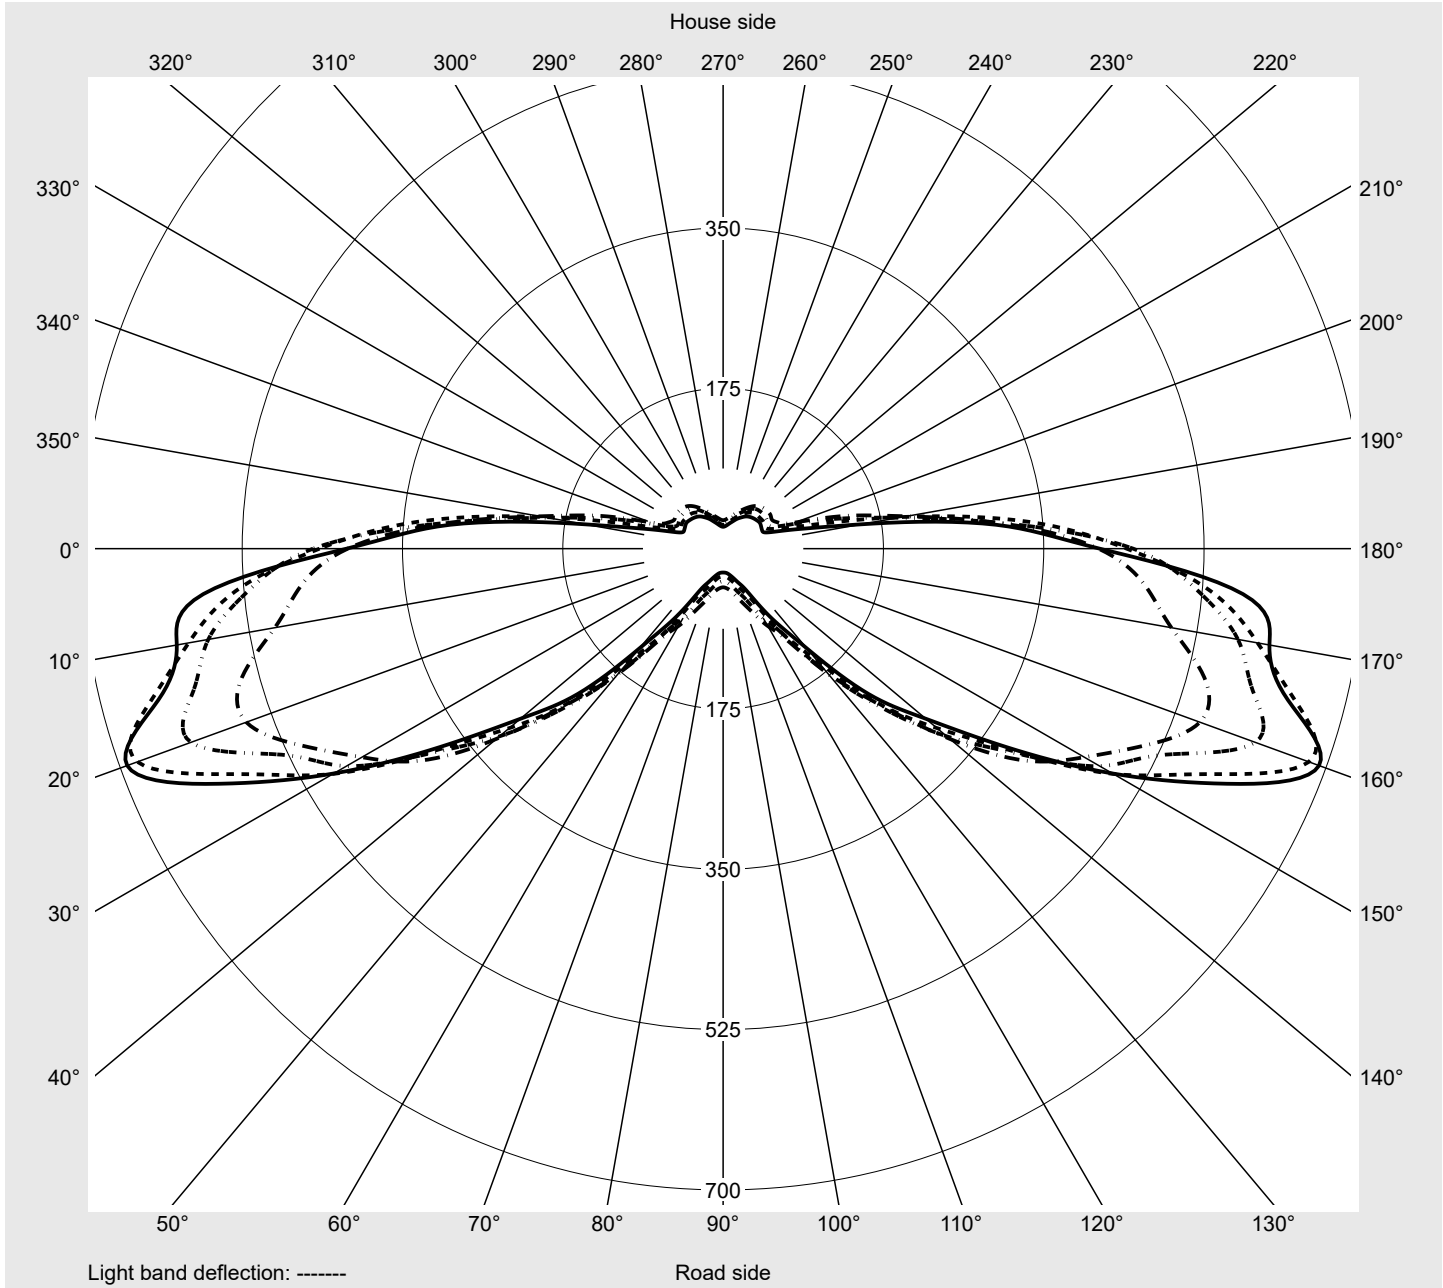

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1BC1F08DE EAN: 4069025076359	LP number 59318_212
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	346.4	349.6	352.5	355.6	359.1	362.3	365.7	368.3	370.4	373.0	374.6	376.5	377.7
5,0°	343.7	349.5	355.4	361.4	367.3	373.2	379.3	384.2	389.4	393.9	397.5	401.2	403.7
7,5°	339.3	347.9	356.6	365.3	374.0	381.6	389.6	396.7	403.5	409.5	414.5	419.1	422.7
10,0°	336.1	347.6	358.5	368.8	378.9	388.6	397.8	406.7	414.0	421.1	427.2	432.1	436.4
12,5°	332.4	346.9	360.1	372.2	383.5	394.6	404.7	413.6	421.9	429.5	436.0	441.3	445.3
15,0°	329.7	346.1	361.1	375.1	387.5	398.9	409.1	418.6	426.9	434.3	439.8	445.0	448.5
17,5°	327.7	346.6	363.6	378.2	391.0	403.2	413.0	422.0	429.0	435.9	440.7	444.1	447.4
20,0°	327.8	348.5	366.7	382.0	394.6	405.6	414.5	422.7	429.0	434.0	437.7	440.1	442.2
22,5°	328.6	351.4	371.1	386.5	398.7	408.5	416.3	422.4	426.4	429.5	431.1	432.2	432.2
25,0°	330.0	353.9	374.6	390.4	402.2	411.2	417.2	421.5	422.5	422.4	421.0	419.7	417.9
27,5°	329.2	355.3	376.7	393.2	404.8	412.6	417.4	418.9	416.6	412.7	408.4	403.2	398.9
30,0°	332.0	357.6	377.2	392.6	404.4	412.7	415.4	414.5	410.0	402.0	393.4	384.1	376.1
32,5°	330.3	355.7	377.8	395.1	403.8	409.0	411.6	407.9	400.0	388.7	376.1	362.7	350.9
35,0°	333.5	360.4	379.2	389.4	400.8	406.6	403.3	397.8	387.0	372.6	356.3	339.2	323.1
37,5°	340.7	359.0	375.7	391.6	396.7	395.7	397.0	383.6	370.6	353.8	334.5	314.1	294.9
40,0°	350.8	370.9	384.9	388.1	388.2	392.5	380.4	371.0	349.7	331.8	310.7	288.4	266.5
42,5°	369.4	382.5	392.4	395.9	395.2	386.4	375.9	352.4	330.3	306.0	284.3	261.6	238.7
45,0°	381.3	398.3	412.4	414.5	416.8	401.2	377.6	347.0	317.0	285.5	257.2	233.4	210.0
47,5°	388.2	413.4	432.8	440.7	445.8	420.7	394.8	353.5	305.8	272.4	237.0	205.3	183.3
50,0°	373.8	408.9	441.6	467.0	473.9	452.9	419.2	363.7	305.3	257.9	216.6	184.5	157.1
52,5°	363.2	400.3	450.6	489.7	492.6	489.2	445.0	382.0	306.8	245.3	196.9	157.3	132.9
55,0°	379.3	415.1	461.7	514.1	511.6	505.2	458.8	398.4	321.4	242.5	179.1	137.3	111.7
57,5°	409.8	462.5	496.9	543.9	553.9	508.2	455.3	403.4	323.0	240.0	177.8	122.2	97.4
60,0°	447.6	519.5	570.7	598.5	618.2	532.1	474.8	389.0	318.7	246.0	178.2	113.8	87.8
62,5°	440.6	534.6	592.5	647.7	680.4	582.3	491.8	384.6	304.7	237.6	160.7	112.9	67.2
65,0°	411.0	569.8	605.6	638.3	692.3	607.3	490.8	377.8	288.9	224.2	142.0	93.7	56.6
67,5°	410.9	569.1	586.8	628.0	635.6	557.8	440.5	356.7	283.8	204.7	125.7	67.7	43.7
70,0°	442.0	555.6	565.8	625.9	575.2	480.6	332.4	279.2	238.2	183.8	113.9	57.6	34.9
72,5°	433.7	537.3	588.0	558.6	482.4	351.9	212.6	171.4	170.7	153.5	102.6	45.2	26.7
75,0°	371.4	397.9	481.8	383.0	304.1	260.7	173.2	132.3	98.5	83.5	58.2	32.8	18.6
77,5°	168.9	238.4	205.4	158.3	144.5	144.1	120.6	97.3	71.0	56.5	28.1	20.4	13.6
80,0°	63.8	83.0	54.2	76.5	72.1	71.7	61.2	43.7	28.6	19.3	16.8	14.2	9.8
82,5°	13.4	13.1	15.5	22.1	20.5	17.2	15.0	12.9	10.3	8.6	7.7	7.0	6.2
85,0°	7.9	8.1	8.4	8.4	8.1	7.7	7.0	6.4	5.8	5.3	4.7	4.0	3.3
87,5°	4.1	4.2	4.4	4.2	4.1	4.0	3.6	3.3	3.0	2.8	2.4	1.9	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1BC1F08DE EAN: 4069025076359	LP number 59318_212
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	378.5	379.5	380.4	381.6	382.0	382.2	343.5	340.8	338.4	336.3	335.0	333.4	330.8
5,0°	405.6	407.4	409.2	411.0	411.9	412.1	337.1	331.3	325.5	320.7	316.1	311.3	306.5
7,5°	426.4	428.9	431.5	433.3	434.7	434.5	330.2	320.5	311.6	303.5	296.0	288.5	281.2
10,0°	439.9	443.4	446.1	448.5	449.8	449.8	323.3	310.6	298.5	286.8	276.1	266.4	256.6
12,5°	448.6	452.5	455.2	457.1	458.7	459.2	316.4	300.7	285.1	270.4	256.6	244.2	231.6
15,0°	451.7	455.3	457.5	459.5	461.0	460.7	311.3	292.0	272.7	255.2	239.0	224.0	209.9
17,5°	450.3	452.8	454.8	456.7	457.1	457.9	306.5	284.1	262.2	241.4	222.3	205.1	189.3
20,0°	444.1	445.8	446.9	448.4	448.5	449.0	304.4	279.0	254.2	231.0	209.2	189.9	172.7
22,5°	432.7	432.5	433.5	434.7	434.4	435.2	302.9	275.4	248.1	222.0	198.2	176.9	158.3
25,0°	416.7	415.4	414.7	415.6	415.7	416.0	301.7	271.7	242.5	214.3	188.8	166.2	147.0
27,5°	394.7	392.9	391.0	391.0	390.6	390.5	299.3	267.4	236.6	206.9	180.4	156.7	137.0
30,0°	370.0	365.9	363.8	362.4	361.8	361.5	298.6	261.6	228.6	198.8	171.7	148.3	128.8
32,5°	341.3	335.2	331.9	329.8	327.5	326.9	295.4	254.6	220.6	190.1	163.1	140.1	121.1
35,0°	310.0	301.2	295.1	291.2	287.1	285.5	296.0	252.1	215.2	182.1	154.6	131.7	113.8
37,5°	279.0	266.9	258.3	251.9	246.0	243.8	303.4	259.2	214.6	178.8	146.2	123.6	107.4
40,0°	247.7	232.6	220.9	211.8	205.0	202.3	303.1	260.0	210.1	176.1	141.2	119.5	101.2
42,5°	218.0	200.1	185.7	174.6	167.0	163.9	311.3	266.6	211.9	174.8	141.3	110.8	96.1
45,0°	188.3	168.7	153.2	140.2	132.3	129.3	320.6	267.8	211.5	163.2	132.8	99.0	91.1
47,5°	161.2	142.1	125.7	112.4	104.3	101.6	313.5	249.2	197.2	145.5	110.9	92.7	85.6
50,0°	136.0	117.3	101.4	89.0	81.6	79.2	299.9	224.1	169.8	127.8	90.3	84.7	80.5
52,5°	114.2	96.1	81.3	70.5	64.7	62.9	283.5	206.5	150.4	111.3	83.4	77.6	75.0
55,0°	94.4	78.5	65.6	56.9	52.5	51.1	285.4	201.3	140.7	95.7	77.0	70.0	69.0
57,5°	77.4	63.2	53.1	46.6	43.4	42.2	309.7	203.3	138.1	83.2	67.0	62.1	63.3
60,0°	63.7	51.8	44.0	39.0	36.5	35.6	312.6	194.5	125.2	76.3	57.6	56.2	57.5
62,5°	51.3	42.4	36.4	32.5	30.9	30.3	335.4	199.0	100.5	63.9	52.2	52.2	52.9
65,0°	42.1	34.9	30.3	27.5	26.3	26.1	299.1	153.0	81.3	51.9	47.0	47.9	48.9
67,5°	34.0	28.3	24.9	23.1	22.2	22.0	270.2	117.3	69.3	46.7	43.4	43.6	43.7
70,0°	27.2	22.9	20.3	19.2	18.5	18.3	266.4	101.7	64.7	39.1	39.6	39.3	38.9
72,5°	20.3	18.0	16.4	15.6	15.1	15.0	222.7	100.6	48.5	33.1	35.0	35.1	34.5
75,0°	15.6	14.0	12.9	12.2	11.9	11.9	204.4	96.9	30.3	28.2	30.1	30.5	30.0
77,5°	11.9	10.4	9.8	9.0	8.6	8.4	131.9	42.0	20.5	21.9	24.3	25.2	25.6
80,0°	8.4	7.4	6.5	6.1	5.6	5.5	55.2	23.9	14.0	15.6	17.5	18.8	19.4
82,5°	5.5	4.6	4.0	3.6	3.4	3.2	11.0	9.2	8.7	9.3	10.2	11.4	12.6
85,0°	2.8	2.4	1.9	1.8	1.6	1.5	7.1	6.2	5.5	4.9	4.4	4.0	3.8
87,5°	1.2	0.9	0.8	0.6	0.5	0.5	3.9	3.5	3.1	2.9	2.6	2.4	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1BC1F08DE EAN: 4069025076359										LP number 59318_212	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	0.5	0.5
2,5°	328.8	326.6	324.6	322.7	320.6	319.1	317.2	316.1	314.6	313.6	313.3	4.2	4.7
5,0°	301.9	297.4	293.1	289.4	285.6	282.2	279.6	277.4	275.4	274.0	273.4	8.2	12.9
7,5°	274.3	267.7	261.9	256.5	251.6	247.2	243.4	240.4	237.7	235.8	235.4	12.1	25.0
10,0°	247.0	238.5	231.2	224.7	219.1	214.1	209.7	206.2	203.2	201.2	200.9	15.7	40.7
12,5°	220.6	210.6	202.0	194.5	188.2	182.9	178.6	174.7	171.8	170.0	169.3	19.1	59.8
15,0°	197.1	185.7	176.4	168.6	162.0	156.7	152.5	148.9	146.3	144.8	144.3	22.2	81.9
17,5°	175.6	163.5	153.7	145.8	139.3	134.3	130.2	127.0	124.6	123.2	122.9	25.0	107.0
20,0°	158.0	145.7	135.8	127.9	122.0	117.0	113.4	110.5	108.5	107.3	106.8	27.7	134.7
22,5°	142.9	130.6	120.7	113.3	107.6	103.2	99.8	97.4	95.5	94.5	94.2	30.2	164.9
25,0°	131.2	118.8	109.5	102.2	97.0	93.1	90.0	87.8	86.1	85.0	84.7	32.4	197.3
27,5°	121.4	109.5	100.1	93.5	88.6	85.1	82.2	80.2	78.7	77.8	77.4	34.3	231.5
30,0°	113.4	101.5	93.2	87.3	82.7	79.3	76.8	74.6	73.1	72.4	72.0	35.8	267.3
32,5°	106.3	95.4	87.6	82.2	78.2	74.9	72.1	70.0	68.4	67.6	67.6	36.9	304.2
35,0°	100.3	90.3	83.4	78.4	74.5	71.0	68.3	65.8	64.1	63.1	63.1	37.6	341.9
37,5°	95.5	86.9	80.6	75.8	71.7	68.0	64.8	62.3	60.4	59.2	59.0	38.1	380.0
40,0°	91.6	84.2	78.6	73.7	69.3	65.2	61.7	58.8	56.8	55.6	55.2	38.3	418.3
42,5°	87.8	82.0	77.2	72.1	67.1	62.8	58.8	55.6	53.4	52.1	51.6	38.6	456.9
45,0°	84.7	80.0	75.6	70.3	65.2	60.2	55.7	52.4	50.0	48.7	48.1	39.1	495.9
47,5°	81.4	77.8	73.7	68.4	63.0	57.5	52.6	49.2	46.7	45.1	44.4	39.4	535.4
50,0°	77.9	74.8	71.1	66.1	60.5	54.8	49.7	45.7	43.0	41.3	40.7	39.5	574.8
52,5°	73.9	71.9	68.0	63.1	57.8	52.0	46.8	42.8	39.8	37.9	37.2	39.7	614.5
55,0°	68.9	67.8	64.6	59.9	54.8	48.9	44.0	39.9	37.0	35.0	34.1	40.5	655.0
57,5°	63.4	62.6	60.5	56.5	51.2	45.9	41.2	37.1	34.1	31.9	31.1	41.9	696.9
60,0°	58.0	57.4	56.2	52.7	47.5	42.6	38.2	34.5	31.4	29.3	28.6	44.1	741.0
62,5°	52.4	52.0	50.9	48.0	43.6	39.2	35.1	31.5	28.8	26.8	26.1	45.4	786.4
65,0°	48.1	46.8	45.2	42.9	39.3	35.9	32.0	28.9	26.3	24.6	23.9	44.7	831.2
67,5°	43.3	41.9	39.9	37.0	34.7	32.1	29.2	26.5	24.0	22.3	21.7	42.4	873.6
70,0°	38.3	36.8	35.1	32.0	30.0	28.4	26.5	24.0	21.7	20.1	19.5	39.3	912.9
72,5°	33.5	32.5	30.4	27.7	26.0	24.8	23.3	21.2	19.1	17.7	17.2	34.1	947.1
75,0°	29.2	28.2	26.5	24.1	22.3	20.8	19.7	18.0	16.2	14.8	14.5	26.1	973.2
77,5°	25.1	24.6	22.6	20.4	18.7	17.2	15.8	14.8	13.3	11.9	11.4	14.9	988.0
80,0°	19.5	20.1	18.9	16.7	15.2	13.7	12.4	11.1	9.8	8.6	8.2	7.2	995.3
82,5°	12.6	12.9	13.0	12.5	11.6	10.3	8.9	7.5	6.1	5.3	5.0	2.8	998.1
85,0°	3.9	4.4	5.0	5.6	5.6	5.5	4.8	3.7	2.9	2.4	2.2	1.3	999.4
87,5°	1.9	1.7	1.4	1.2	0.9	0.8	0.8	0.7	0.3	0.2	0.2	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1BC1F08DE EAN: 4069025076359	LP number 59318_212
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	3590	27.7	28.1	27.9
95	241	252	3406	26.1	26.6	26.4
90	229	250	3237	24.6	25.1	24.8
85	216	248	3053	23.1	23.6	23.4
80	203	246	2869	21.6	22.0	21.8
75	190	243	2685	20.1	20.6	20.4
70	178	241	2516	18.8	19.2	19.0
65	165	238	2332	17.4	17.8	17.6
60	152	235	2148	16.0	16.3	16.2
55	140	232	1979	14.8	15.1	15.0
50	127	229	1795	13.4	13.7	13.6
45	114	225	1611	12.1	12.4	12.2
40	102	221	1442	10.9	11.1	11.0
35	89	216	1258	9.7	9.8	9.8
30	76	210	1074	8.5	8.6	8.6
25	63	203	890	7.3	7.4	7.4
20	51	195	721	6.1	6.2	6.2
15	38	184	537	5.0	5.1	5.0
13	33	179	466	4.6	4.6	4.6