

Photometric test report

Family
Streetlight 11 micro LED



Order number: 5XC1BC1F08DE
EAN: 4069025076359

Version

Optic

Cover

Lamps

Controlgear

Setting

Rated values

post-top or side-entry mounting

asymmetric, extremely wide distribution (ST0.5a)

transparent, PMMA

LED 2700 K | CRI ≥ 70

ECG SITECO iQ


individual position

Net luminous flux = 3290 lm
Power consumption = 26.8 W
Luminous efficacy = 122.8 lm/W

LP number
59318_211

serial
documentation
22.05.2024


siteco

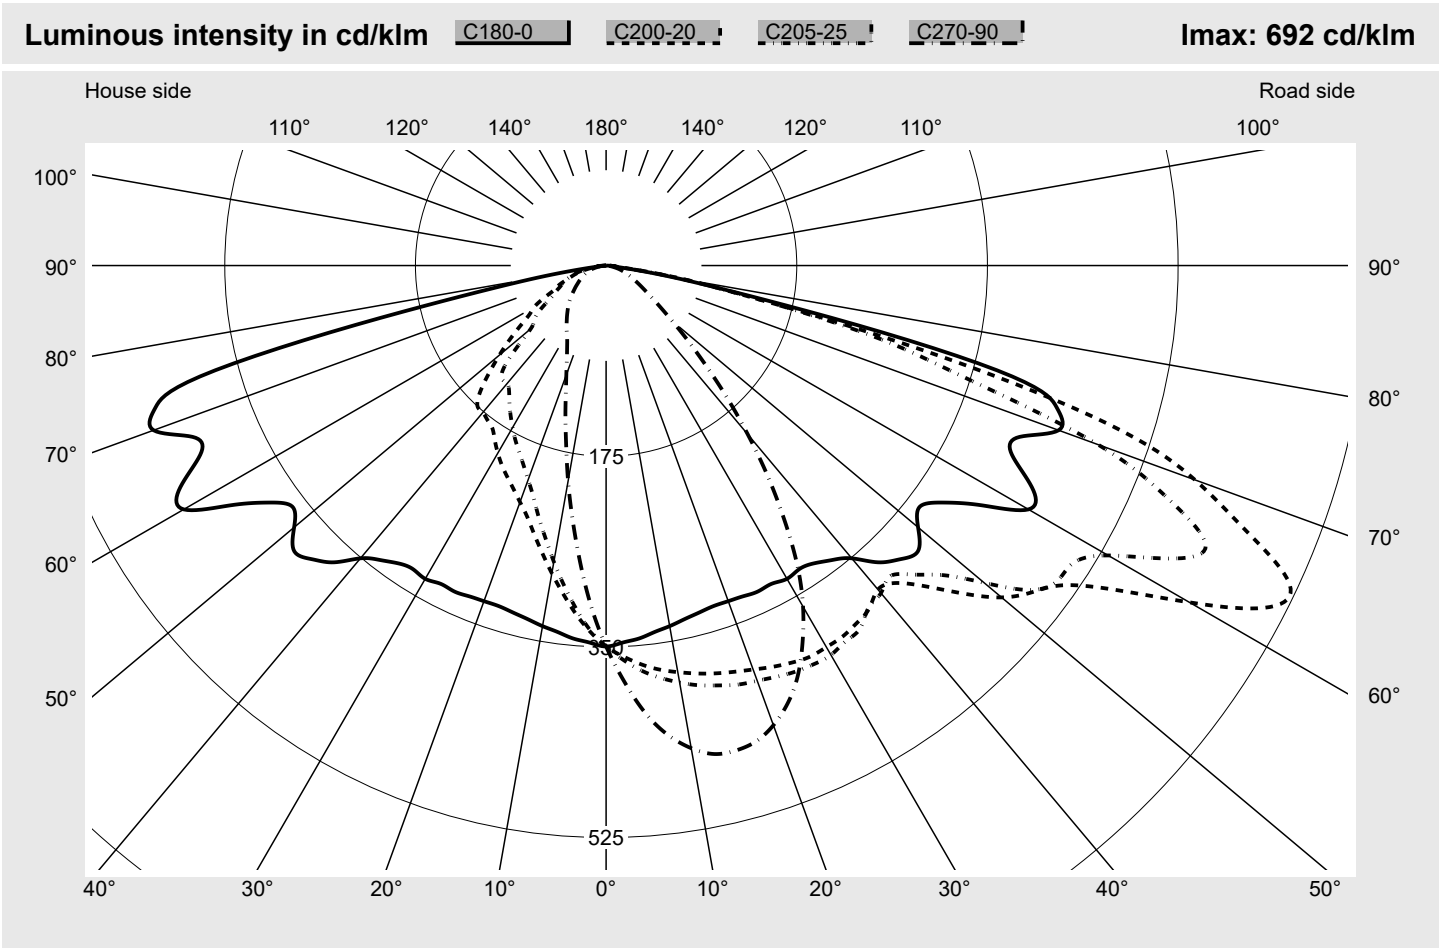

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	625.9
Eta 90° - 180°	0.0%	Imax 80°	83.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1BC1F08DE EAN: 4069025076359	LP number 59318_211
Envelope curve in cd/klm KMK 65° KMK 62.5° KMK 60° KMK 57.5°		sit eco

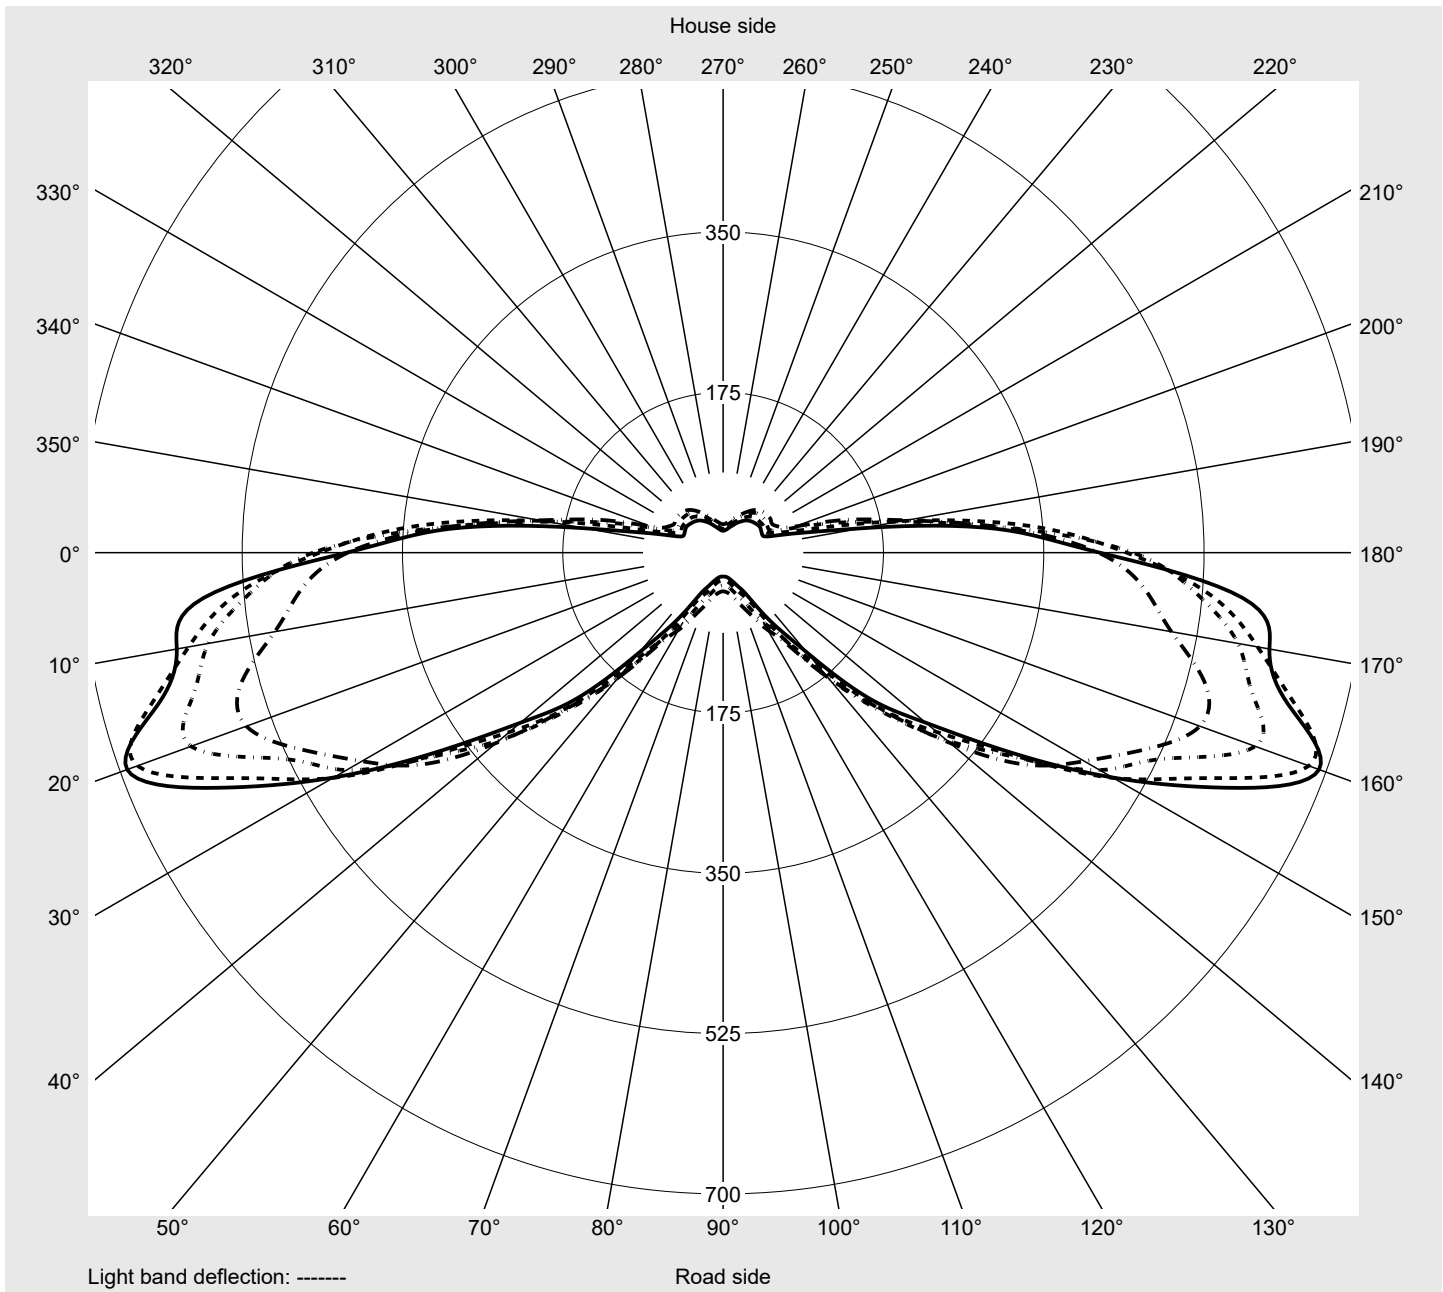

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1BC1F08DE EAN: 4069025076359	LP number 59318_211
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	346.4	349.6	352.5	355.6	359.1	362.3	365.7	368.3	370.4	373.0	374.6	376.5	377.7
5,0°	343.7	349.5	355.4	361.4	367.3	373.2	379.3	384.2	389.4	393.9	397.5	401.2	403.7
7,5°	339.3	347.9	356.6	365.3	374.0	381.6	389.6	396.7	403.5	409.5	414.5	419.1	422.7
10,0°	336.1	347.6	358.5	368.8	378.9	388.6	397.8	406.7	414.0	421.1	427.2	432.1	436.4
12,5°	332.4	346.9	360.1	372.2	383.5	394.6	404.7	413.6	421.9	429.5	436.0	441.3	445.3
15,0°	329.7	346.1	361.1	375.1	387.5	398.9	409.1	418.6	426.9	434.3	439.8	445.0	448.5
17,5°	327.7	346.6	363.6	378.2	391.0	403.2	413.0	422.0	429.0	435.9	440.7	444.1	447.4
20,0°	327.8	348.5	366.7	382.0	394.6	405.6	414.5	422.7	429.0	434.0	437.7	440.1	442.2
22,5°	328.6	351.4	371.1	386.5	398.7	408.5	416.3	422.4	426.4	429.5	431.1	432.2	432.2
25,0°	330.0	353.9	374.6	390.4	402.2	411.2	417.2	421.5	422.5	422.4	421.0	419.7	417.9
27,5°	329.2	355.3	376.7	393.2	404.8	412.6	417.4	418.9	416.6	412.7	408.4	403.2	398.9
30,0°	332.0	357.6	377.2	392.6	404.4	412.7	415.4	414.5	410.0	402.0	393.4	384.1	376.1
32,5°	330.3	355.7	377.8	395.1	403.8	409.0	411.6	407.9	400.0	388.7	376.1	362.7	350.9
35,0°	333.5	360.4	379.2	389.4	400.8	406.6	403.3	397.8	387.0	372.6	356.3	339.2	323.1
37,5°	340.7	359.0	375.7	391.6	396.7	395.7	397.0	383.6	370.6	353.8	334.5	314.1	294.9
40,0°	350.8	370.9	384.9	388.1	388.2	392.5	380.4	371.0	349.7	331.8	310.7	288.4	266.5
42,5°	369.4	382.5	392.4	395.9	395.2	386.4	375.9	352.4	330.3	306.0	284.3	261.6	238.7
45,0°	381.3	398.3	412.4	414.5	416.8	401.2	377.6	347.0	317.0	285.5	257.2	233.4	210.0
47,5°	388.2	413.4	432.8	440.7	445.8	420.7	394.8	353.5	305.8	272.4	237.0	205.3	183.3
50,0°	373.8	408.9	441.6	467.0	473.9	452.9	419.2	363.7	305.3	257.9	216.6	184.5	157.1
52,5°	363.2	400.3	450.6	489.7	492.6	489.2	445.0	382.0	306.8	245.3	196.9	157.3	132.9
55,0°	379.3	415.1	461.7	514.1	511.6	505.2	458.8	398.4	321.4	242.5	179.1	137.3	111.7
57,5°	409.8	462.5	496.9	543.9	553.9	508.2	455.3	403.4	323.0	240.0	177.8	122.2	97.4
60,0°	447.6	519.5	570.7	598.5	618.2	532.1	474.8	389.0	318.7	246.0	178.2	113.8	87.8
62,5°	440.6	534.6	592.5	647.7	680.4	582.3	491.8	384.6	304.7	237.6	160.7	112.9	67.2
65,0°	411.0	569.8	605.6	638.3	692.3	607.3	490.8	377.8	288.9	224.2	142.0	93.7	56.6
67,5°	410.9	569.1	586.8	628.0	635.6	557.8	440.5	356.7	283.8	204.7	125.7	67.7	43.7
70,0°	442.0	555.6	565.8	625.9	575.2	480.6	332.4	279.2	238.2	183.8	113.9	57.6	34.9
72,5°	433.7	537.3	588.0	558.6	482.4	351.9	212.6	171.4	170.7	153.5	102.6	45.2	26.7
75,0°	371.4	397.9	481.8	383.0	304.1	260.7	173.2	132.3	98.5	83.5	58.2	32.8	18.6
77,5°	168.9	238.4	205.4	158.3	144.5	144.1	120.6	97.3	71.0	56.5	28.1	20.4	13.6
80,0°	63.8	83.0	54.2	76.5	72.1	71.7	61.2	43.7	28.6	19.3	16.8	14.2	9.8
82,5°	13.4	13.1	15.5	22.1	20.5	17.2	15.0	12.9	10.3	8.6	7.7	7.0	6.2
85,0°	7.9	8.1	8.4	8.4	8.1	7.7	7.0	6.4	5.8	5.3	4.7	4.0	3.3
87,5°	4.1	4.2	4.4	4.2	4.1	4.0	3.6	3.3	3.0	2.8	2.4	1.9	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED				Order number: 5XC1BC1F08DE EAN: 4069025076359								LP number 59318_211			
Table of values for luminous intensities												Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°		
γ	Luminous intensity in cd/klm														
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6		
2,5°	378.5	379.5	380.4	381.6	382.0	382.2	343.5	340.8	338.4	336.3	335.0	333.4	330.8		
5,0°	405.6	407.4	409.2	411.0	411.9	412.1	337.1	331.3	325.5	320.7	316.1	311.3	306.5		
7,5°	426.4	428.9	431.5	433.3	434.7	434.5	330.2	320.5	311.6	303.5	296.0	288.5	281.2		
10,0°	439.9	443.4	446.1	448.5	449.8	449.8	323.3	310.6	298.5	286.8	276.1	266.4	256.6		
12,5°	448.6	452.5	455.2	457.1	458.7	459.2	316.4	300.7	285.1	270.4	256.6	244.2	231.6		
15,0°	451.7	455.3	457.5	459.5	461.0	460.7	311.3	292.0	272.7	255.2	239.0	224.0	209.9		
17,5°	450.3	452.8	454.8	456.7	457.1	457.9	306.5	284.1	262.2	241.4	222.3	205.1	189.3		
20,0°	444.1	445.8	446.9	448.4	448.5	449.0	304.4	279.0	254.2	231.0	209.2	189.9	172.7		
22,5°	432.7	432.5	433.5	434.7	434.4	435.2	302.9	275.4	248.1	222.0	198.2	176.9	158.3		
25,0°	416.7	415.4	414.7	415.6	415.7	416.0	301.7	271.7	242.5	214.3	188.8	166.2	147.0		
27,5°	394.7	392.9	391.0	391.0	390.6	390.5	299.3	267.4	236.6	206.9	180.4	156.7	137.0		
30,0°	370.0	365.9	363.8	362.4	361.8	361.5	298.6	261.6	228.6	198.8	171.7	148.3	128.8		
32,5°	341.3	335.2	331.9	329.8	327.5	326.9	295.4	254.6	220.6	190.1	163.1	140.1	121.1		
35,0°	310.0	301.2	295.1	291.2	287.1	285.5	296.0	252.1	215.2	182.1	154.6	131.7	113.8		
37,5°	279.0	266.9	258.3	251.9	246.0	243.8	303.4	259.2	214.6	178.8	146.2	123.6	107.4		
40,0°	247.7	232.6	220.9	211.8	205.0	202.3	303.1	260.0	210.1	176.1	141.2	119.5	101.2		
42,5°	218.0	200.1	185.7	174.6	167.0	163.9	311.3	266.6	211.9	174.8	141.3	110.8	96.1		
45,0°	188.3	168.7	153.2	140.2	132.3	129.3	320.6	267.8	211.5	163.2	132.8	99.0	91.1		
47,5°	161.2	142.1	125.7	112.4	104.3	101.6	313.5	249.2	197.2	145.5	110.9	92.7	85.6		
50,0°	136.0	117.3	101.4	89.0	81.6	79.2	299.9	224.1	169.8	127.8	90.3	84.7	80.5		
52,5°	114.2	96.1	81.3	70.5	64.7	62.9	283.5	206.5	150.4	111.3	83.4	77.6	75.0		
55,0°	94.4	78.5	65.6	56.9	52.5	51.1	285.4	201.3	140.7	95.7	77.0	70.0	69.0		
57,5°	77.4	63.2	53.1	46.6	43.4	42.2	309.7	203.3	138.1	83.2	67.0	62.1	63.3		
60,0°	63.7	51.8	44.0	39.0	36.5	35.6	312.6	194.5	125.2	76.3	57.6	56.2	57.5		
62,5°	51.3	42.4	36.4	32.5	30.9	30.3	335.4	199.0	100.5	63.9	52.2	52.2	52.9		
65,0°	42.1	34.9	30.3	27.5	26.3	26.1	299.1	153.0	81.3	51.9	47.0	47.9	48.9		
67,5°	34.0	28.3	24.9	23.1	22.2	22.0	270.2	117.3	69.3	46.7	43.4	43.6	43.7		
70,0°	27.2	22.9	20.3	19.2	18.5	18.3	266.4	101.7	64.7	39.1	39.6	39.3	38.9		
72,5°	20.3	18.0	16.4	15.6	15.1	15.0	222.7	100.6	48.5	33.1	35.0	35.1	34.5		
75,0°	15.6	14.0	12.9	12.2	11.9	11.9	204.4	96.9	30.3	28.2	30.1	30.5	30.0		
77,5°	11.9	10.4	9.8	9.0	8.6	8.4	131.9	42.0	20.5	21.9	24.3	25.2	25.6		
80,0°	8.4	7.4	6.5	6.1	5.6	5.5	55.2	23.9	14.0	15.6	17.5	18.8	19.4		
82,5°	5.5	4.6	4.0	3.6	3.4	3.2	11.0	9.2	8.7	9.3	10.2	11.4	12.6		
85,0°	2.8	2.4	1.9	1.8	1.6	1.5	7.1	6.2	5.5	4.9	4.4	4.0	3.8		
87,5°	1.2	0.9	0.8	0.6	0.5	0.5	3.9	3.5	3.1	2.9	2.6	2.4	2.1		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1BC1F08DE EAN: 4069025076359										LP number 59318_211	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	0.5	0.5
2,5°	328.8	326.6	324.6	322.7	320.6	319.1	317.2	316.1	314.6	313.6	313.3	4.2	4.7
5,0°	301.9	297.4	293.1	289.4	285.6	282.2	279.6	277.4	275.4	274.0	273.4	8.2	12.9
7,5°	274.3	267.7	261.9	256.5	251.6	247.2	243.4	240.4	237.7	235.8	235.4	12.1	25.0
10,0°	247.0	238.5	231.2	224.7	219.1	214.1	209.7	206.2	203.2	201.2	200.9	15.7	40.7
12,5°	220.6	210.6	202.0	194.5	188.2	182.9	178.6	174.7	171.8	170.0	169.3	19.1	59.8
15,0°	197.1	185.7	176.4	168.6	162.0	156.7	152.5	148.9	146.3	144.8	144.3	22.2	81.9
17,5°	175.6	163.5	153.7	145.8	139.3	134.3	130.2	127.0	124.6	123.2	122.9	25.0	107.0
20,0°	158.0	145.7	135.8	127.9	122.0	117.0	113.4	110.5	108.5	107.3	106.8	27.7	134.7
22,5°	142.9	130.6	120.7	113.3	107.6	103.2	99.8	97.4	95.5	94.5	94.2	30.2	164.9
25,0°	131.2	118.8	109.5	102.2	97.0	93.1	90.0	87.8	86.1	85.0	84.7	32.4	197.3
27,5°	121.4	109.5	100.1	93.5	88.6	85.1	82.2	80.2	78.7	77.8	77.4	34.3	231.5
30,0°	113.4	101.5	93.2	87.3	82.7	79.3	76.8	74.6	73.1	72.4	72.0	35.8	267.3
32,5°	106.3	95.4	87.6	82.2	78.2	74.9	72.1	70.0	68.4	67.6	67.6	36.9	304.2
35,0°	100.3	90.3	83.4	78.4	74.5	71.0	68.3	65.8	64.1	63.1	63.1	37.6	341.9
37,5°	95.5	86.9	80.6	75.8	71.7	68.0	64.8	62.3	60.4	59.2	59.0	38.1	380.0
40,0°	91.6	84.2	78.6	73.7	69.3	65.2	61.7	58.8	56.8	55.6	55.2	38.3	418.3
42,5°	87.8	82.0	77.2	72.1	67.1	62.8	58.8	55.6	53.4	52.1	51.6	38.6	456.9
45,0°	84.7	80.0	75.6	70.3	65.2	60.2	55.7	52.4	50.0	48.7	48.1	39.1	495.9
47,5°	81.4	77.8	73.7	68.4	63.0	57.5	52.6	49.2	46.7	45.1	44.4	39.4	535.4
50,0°	77.9	74.8	71.1	66.1	60.5	54.8	49.7	45.7	43.0	41.3	40.7	39.5	574.8
52,5°	73.9	71.9	68.0	63.1	57.8	52.0	46.8	42.8	39.8	37.9	37.2	39.7	614.5
55,0°	68.9	67.8	64.6	59.9	54.8	48.9	44.0	39.9	37.0	35.0	34.1	40.5	655.0
57,5°	63.4	62.6	60.5	56.5	51.2	45.9	41.2	37.1	34.1	31.9	31.1	41.9	696.9
60,0°	58.0	57.4	56.2	52.7	47.5	42.6	38.2	34.5	31.4	29.3	28.6	44.1	741.0
62,5°	52.4	52.0	50.9	48.0	43.6	39.2	35.1	31.5	28.8	26.8	26.1	45.4	786.4
65,0°	48.1	46.8	45.2	42.9	39.3	35.9	32.0	28.9	26.3	24.6	23.9	44.7	831.2
67,5°	43.3	41.9	39.9	37.0	34.7	32.1	29.2	26.5	24.0	22.3	21.7	42.4	873.6
70,0°	38.3	36.8	35.1	32.0	30.0	28.4	26.5	24.0	21.7	20.1	19.5	39.3	912.9
72,5°	33.5	32.5	30.4	27.7	26.0	24.8	23.3	21.2	19.1	17.7	17.2	34.1	947.1
75,0°	29.2	28.2	26.5	24.1	22.3	20.8	19.7	18.0	16.2	14.8	14.5	26.1	973.2
77,5°	25.1	24.6	22.6	20.4	18.7	17.2	15.8	14.8	13.3	11.9	11.4	14.9	988.0
80,0°	19.5	20.1	18.9	16.7	15.2	13.7	12.4	11.1	9.8	8.6	8.2	7.2	995.3
82,5°	12.6	12.9	13.0	12.5	11.6	10.3	8.9	7.5	6.1	5.3	5.0	2.8	998.1
85,0°	3.9	4.4	5.0	5.6	5.6	5.5	4.8	3.7	2.9	2.4	2.2	1.3	999.4
87,5°	1.9	1.7	1.4	1.2	0.9	0.8	0.8	0.7	0.3	0.2	0.2	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1BC1F08DE EAN: 4069025076359	LP number 59318_211
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	3290	26.8	27.3	27.0
95	241	252	3122	25.2	25.7	25.4
90	229	250	2966	23.8	24.3	24.0
85	216	248	2798	22.3	22.8	22.6
80	203	246	2629	20.9	21.3	21.1
75	190	243	2461	19.4	19.8	19.6
70	178	241	2306	18.1	18.5	18.3
65	165	238	2137	16.7	17.1	16.9
60	152	235	1969	15.4	15.7	15.6
55	140	232	1813	14.2	14.4	14.3
50	127	229	1645	12.9	13.1	13.0
45	114	225	1477	11.7	11.8	11.8
40	102	221	1321	10.4	10.6	10.5
35	89	216	1153	9.3	9.5	9.4
30	76	210	984	8.1	8.2	8.1
25	63	203	816	6.9	7.0	7.0
20	51	195	661	5.9	6.0	6.0
15	38	184	492	4.9	4.9	4.9
13	34	180	440	4.5	4.6	4.6