

Photometric test report

Family Streetlight 11 micro LED

Order number: 5XC1CC1F08DE
EAN: 4069025076397

LP number
58063_259



Version	post-top or side-entry mounting
Optic	direct, asymmetric extremely wide distribution P100001
Cover	transparent, PMMA
Lamps	LED 2700 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Setting	individual position
Rated values	Net luminous flux = 2820 lm Power consumption = 22.7 W Luminous efficacy = 124.2 lm/W

serial
documentation
22.05.2024

siteco


Luminous intensity in cd/klm

C180-0

C185-5

C270-90

Imax: 989 cd/klm

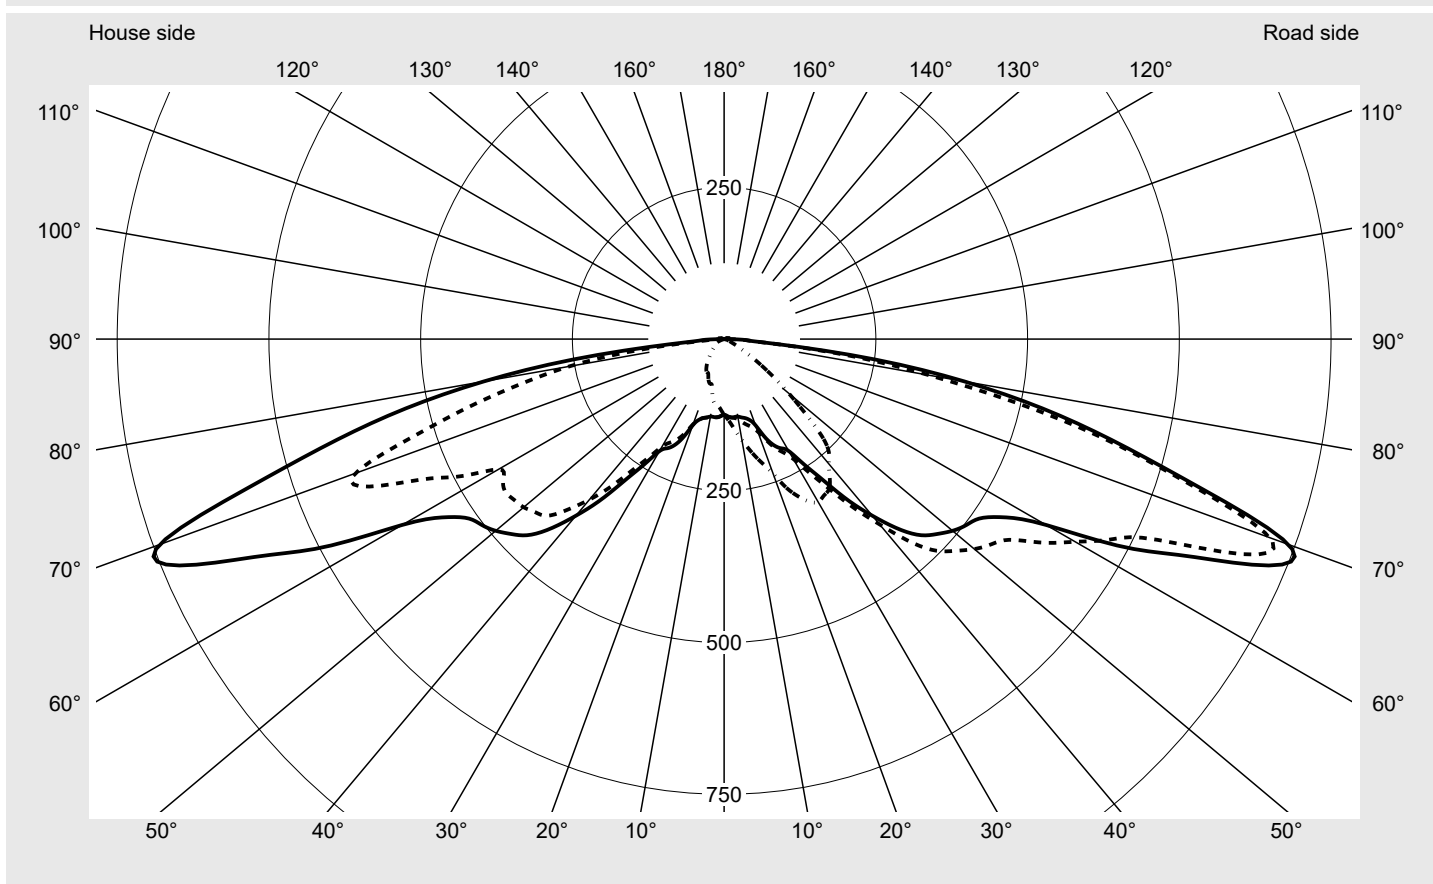

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	---
Imax 70°	989.5
Imax 80°	402.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_259
Envelope curve in cd/klm KMK 70° KMK 67.5° KMK 65° KMK 62.5°		sit eco

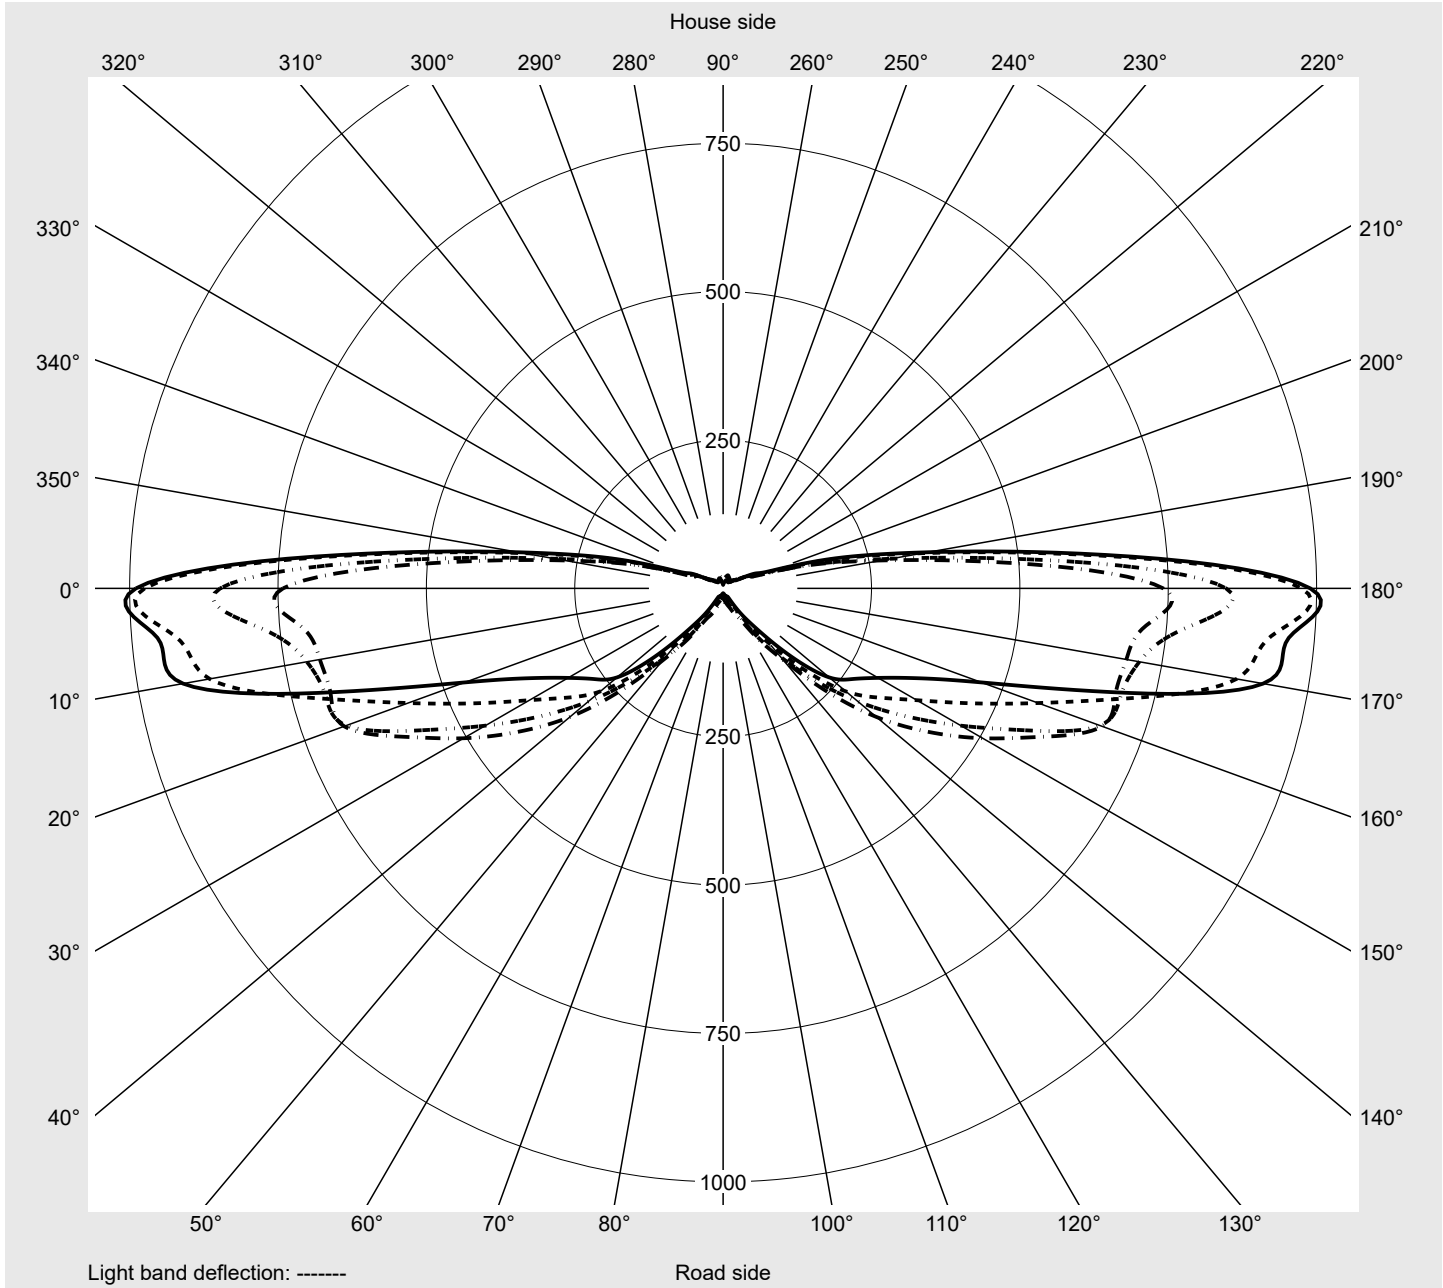

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_259
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	127.0	126.9	126.7	127.1	127.5	127.3	127.1	128.3	129.5	129.7	130.1	130.6	131.2
5,0°	129.4	129.7	129.9	131.6	133.3	133.8	134.2	136.5	138.5	139.4	140.0	140.9	141.8
7,5°	129.5	131.2	133.6	138.7	143.9	146.8	149.1	151.9	154.4	155.9	156.8	157.5	158.1
10,0°	129.7	134.2	139.4	146.6	153.6	158.3	162.1	165.8	169.0	171.3	173.3	173.9	174.6
12,5°	132.2	140.4	148.4	155.8	162.3	167.0	171.3	176.3	181.1	185.3	189.4	189.9	190.5
15,0°	134.8	146.4	156.9	164.5	170.7	176.6	182.2	188.1	194.0	199.8	205.5	206.6	207.7
17,5°	139.8	152.1	163.1	170.1	176.2	184.1	192.2	199.8	207.4	215.7	222.8	226.3	228.6
20,0°	151.0	162.2	172.4	179.8	187.1	197.9	208.5	215.8	222.4	230.5	237.9	242.4	245.9
22,5°	174.4	179.0	184.6	194.4	206.6	220.1	234.5	236.8	239.6	243.7	248.6	253.7	259.0
25,0°	192.5	197.2	200.3	212.0	224.9	242.0	260.4	258.9	257.4	259.0	261.2	265.2	269.7
27,5°	202.8	210.3	217.6	227.2	238.5	251.8	265.9	270.3	274.3	276.8	278.7	280.3	281.7
30,0°	213.1	228.0	242.7	251.7	258.7	264.6	271.4	282.3	294.5	293.7	292.8	288.0	283.7
32,5°	244.6	260.4	276.7	281.4	286.1	286.2	286.4	306.4	326.3	316.5	305.5	289.8	274.8
35,0°	282.9	300.1	316.1	317.6	319.2	314.0	308.8	326.9	345.1	329.2	310.9	285.5	257.6
37,5°	333.9	349.8	361.3	359.3	357.4	348.9	340.5	341.1	341.8	326.7	305.4	265.9	220.2
40,0°	379.9	398.5	411.0	406.7	402.4	389.4	375.8	360.7	343.6	326.1	299.9	252.8	198.4
42,5°	423.6	452.2	475.0	468.4	461.7	442.8	420.4	388.6	352.5	315.2	277.3	240.7	204.4
45,0°	456.8	492.9	524.2	518.3	512.3	487.3	457.2	413.0	362.6	308.3	258.7	224.8	201.4
47,5°	475.5	516.4	551.6	551.7	551.9	521.1	484.9	433.5	374.3	306.8	245.7	210.0	186.6
50,0°	491.4	538.2	578.7	582.9	587.1	549.7	507.2	451.2	386.1	306.4	233.6	193.5	167.9
52,5°	503.2	555.2	600.4	609.4	618.4	574.3	526.5	470.9	404.4	312.6	225.5	175.0	141.6
55,0°	514.9	576.5	631.8	638.3	644.8	591.1	535.5	478.3	409.9	308.7	211.5	155.7	119.1
57,5°	546.5	624.5	690.5	680.1	669.8	598.7	528.8	467.0	396.4	287.5	185.0	133.5	103.0
60,0°	612.4	667.9	723.5	703.4	683.3	601.3	522.1	456.0	382.9	270.8	166.0	114.7	85.6
62,5°	741.6	715.8	690.0	684.7	679.5	591.9	505.0	421.3	336.9	242.9	158.3	106.2	64.7
65,0°	847.5	779.9	712.2	694.0	675.7	566.2	462.6	375.5	296.7	219.8	150.6	96.0	46.7
67,5°	974.7	926.6	878.5	713.8	564.9	457.9	376.9	321.0	270.1	194.9	121.9	73.7	32.8
70,0°	989.5	956.7	924.0	674.9	463.3	357.9	301.7	266.3	233.4	162.9	91.8	51.1	19.0
72,5°	831.9	816.0	800.1	583.1	366.1	295.6	234.6	206.1	179.1	118.9	59.9	32.6	14.6
75,0°	681.5	667.1	652.6	470.2	287.8	232.2	183.0	156.1	129.7	81.8	27.9	19.4	11.0
77,5°	548.6	506.8	451.2	346.8	243.9	193.2	158.6	118.0	80.3	48.7	19.3	14.0	8.7
80,0°	402.4	343.4	286.5	233.7	187.8	156.1	126.6	84.0	44.9	25.8	12.7	9.5	6.7
82,5°	236.3	206.9	176.9	143.8	113.5	94.6	77.5	52.1	28.7	17.2	9.4	7.2	5.2
85,0°	70.2	68.8	67.3	53.3	39.3	39.7	40.0	27.0	15.8	10.1	6.1	4.8	3.6
87,5°	35.1	34.4	33.7	26.6	19.6	17.6	15.0	10.4	5.9	3.8	2.3	1.8	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_259
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	131.1	130.9	130.9	130.9	131.4	131.9	126.9	126.8	126.1	125.5	125.9	126.3	126.8
5,0°	141.5	141.3	141.2	141.1	141.4	141.8	129.1	128.6	127.9	127.1	127.7	128.4	128.2
7,5°	157.8	157.4	157.6	157.8	156.3	154.8	129.6	129.6	129.5	129.3	130.9	132.4	129.8
10,0°	174.4	174.2	173.9	173.5	171.2	169.0	130.3	130.9	131.7	132.5	132.9	133.3	129.2
12,5°	191.4	192.5	190.0	187.6	185.8	184.3	132.5	132.7	134.6	136.6	133.1	128.7	122.0
15,0°	208.6	209.6	205.9	202.3	201.4	200.5	134.6	134.4	137.9	141.3	133.2	126.0	121.3
17,5°	227.3	225.9	221.2	216.4	216.5	216.6	139.7	139.6	143.5	147.3	135.2	123.1	136.0
20,0°	243.2	240.3	236.8	233.2	234.6	236.0	149.3	147.6	150.0	152.3	139.2	126.0	144.7
22,5°	255.9	252.7	253.2	253.7	258.5	263.4	167.4	159.8	158.4	156.9	150.7	144.4	150.0
25,0°	266.4	263.2	268.7	274.2	279.5	284.8	182.5	171.8	164.9	159.3	153.9	149.1	145.3
27,5°	279.5	277.3	278.7	280.0	290.8	301.5	192.1	180.4	169.0	157.3	144.5	132.5	124.7
30,0°	280.8	278.3	282.1	285.9	297.9	309.9	204.4	194.7	177.5	157.5	136.4	117.1	105.2
32,5°	265.9	258.9	270.2	281.7	293.6	305.8	231.5	215.7	189.9	160.5	129.5	102.7	89.7
35,0°	249.1	240.7	259.9	277.5	290.3	301.7	264.1	240.1	204.4	164.7	127.2	89.9	79.7
37,5°	221.8	223.5	244.4	263.2	275.5	285.6	306.6	270.5	223.9	172.9	123.8	74.6	67.8
40,0°	203.1	207.9	226.8	244.2	257.0	268.4	345.3	299.3	239.5	176.3	121.8	69.1	61.7
42,5°	201.2	197.9	209.1	221.7	238.2	256.0	381.0	325.6	248.6	172.7	120.2	83.0	62.5
45,0°	189.2	181.7	186.8	191.9	211.1	230.3	411.6	352.0	259.0	169.0	119.6	88.2	65.7
47,5°	170.0	157.1	152.5	147.9	164.8	181.6	422.2	353.0	248.0	149.8	105.3	81.5	60.8
50,0°	146.6	130.9	119.6	110.2	124.7	139.2	431.1	353.9	248.2	131.8	100.7	72.8	54.5
52,5°	116.3	98.9	87.1	77.9	90.5	103.0	435.6	350.8	238.4	115.6	86.2	60.3	45.3
55,0°	92.1	74.1	62.4	53.8	63.4	73.0	439.5	347.7	228.5	99.2	72.5	49.5	37.7
57,5°	77.0	58.9	48.1	40.5	44.9	49.2	431.5	306.1	191.4	78.2	58.5	38.8	32.3
60,0°	61.9	46.2	36.8	30.3	30.9	31.5	429.1	264.5	155.8	65.7	49.2	32.6	28.1
62,5°	49.8	36.7	29.4	24.0	22.9	21.8	489.6	270.9	151.9	66.0	48.8	34.0	26.1
65,0°	37.0	28.3	22.5	18.6	16.3	14.7	546.3	287.4	155.7	66.3	49.2	34.1	25.5
67,5°	26.6	20.9	16.7	13.7	12.1	11.0	635.2	341.7	186.3	76.8	54.4	32.0	24.6
70,0°	17.0	14.9	12.3	9.9	8.9	8.2	646.5	350.5	195.4	87.3	59.0	30.7	23.7
72,5°	12.4	10.4	8.9	7.6	7.1	6.6	541.4	290.6	159.2	67.5	48.8	32.7	24.1
75,0°	8.9	7.1	6.2	5.6	5.4	5.2	439.7	231.4	123.8	49.7	39.9	30.9	23.8
77,5°	7.0	5.5	4.7	4.2	3.9	3.7	344.9	171.2	87.0	32.7	27.6	22.8	18.7
80,0°	5.1	4.1	3.4	3.0	2.8	2.6	258.9	115.4	67.6	19.9	17.9	16.0	14.2
82,5°	4.0	3.2	2.6	2.2	2.0	1.9	151.3	66.3	39.6	12.8	11.7	10.8	10.3
85,0°	2.8	2.2	1.7	1.5	1.3	1.2	43.7	17.3	12.2	7.2	6.8	6.4	6.5
87,5°	1.0	0.8	0.7	0.6	0.5	0.5	21.9	8.7	5.7	2.7	2.5	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1CC1F08DE EAN: 4069025076397										LP number 58063_259	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	0.2	0.2
2,5°	127.2	125.8	124.4	123.3	122.1	120.5	119.0	118.1	117.5	117.1	116.9	1.5	1.7
5,0°	128.1	126.3	124.3	121.4	118.6	116.5	114.7	113.2	111.9	111.2	110.6	3.1	4.8
7,5°	127.0	123.7	120.0	116.4	112.7	112.6	112.4	110.5	108.6	108.6	108.5	4.9	9.7
10,0°	124.9	120.3	115.8	112.0	108.5	109.2	110.0	107.5	105.2	103.7	102.4	6.7	16.4
12,5°	114.6	116.9	119.2	112.6	106.6	102.8	99.8	96.1	92.9	91.4	90.3	8.6	25.0
15,0°	117.6	120.0	122.5	113.4	104.8	97.8	91.6	86.0	80.6	79.4	78.2	10.7	35.8
17,5°	148.9	131.4	115.8	105.4	97.9	92.3	87.9	83.2	78.7	77.8	77.0	13.1	48.9
20,0°	163.4	134.0	109.1	96.8	90.1	85.0	81.7	78.8	76.7	75.2	73.9	15.6	64.5
22,5°	155.6	128.1	104.0	90.2	79.8	75.5	71.8	69.9	68.6	68.3	68.1	18.4	82.9
25,0°	141.8	117.6	96.2	81.8	72.0	66.1	62.0	61.3	60.5	61.4	62.2	21.2	104.0
27,5°	116.0	99.6	83.3	74.1	68.0	63.2	59.2	59.4	59.6	60.5	61.3	23.6	127.6
30,0°	95.5	83.3	72.6	67.1	63.5	60.0	56.8	57.8	58.8	58.8	58.8	26.0	153.7
32,5°	81.8	72.5	65.0	60.7	58.2	56.4	55.0	55.0	55.0	54.5	54.0	28.7	182.4
35,0°	70.4	63.1	57.7	55.0	53.4	53.3	53.2	51.9	50.8	49.8	48.8	31.6	214.0
37,5°	61.4	55.7	50.2	49.8	49.4	48.1	47.1	46.5	46.2	44.4	42.5	34.2	248.2
40,0°	54.7	49.2	44.3	44.7	45.2	43.5	41.9	41.5	41.1	39.1	37.2	37.2	285.4
42,5°	51.9	45.1	40.7	40.4	39.9	39.1	37.9	36.1	34.1	33.6	33.2	40.8	326.2
45,0°	48.4	42.9	37.4	36.5	35.7	35.1	34.6	31.8	29.0	29.2	29.4	43.8	370.0
47,5°	43.9	39.3	34.7	33.6	32.5	32.3	32.1	29.2	26.3	25.9	25.6	45.2	415.2
50,0°	39.3	35.4	31.5	30.7	29.8	29.9	30.0	27.1	24.2	23.3	22.5	46.6	461.8
52,5°	34.0	30.7	27.5	27.5	27.4	28.0	28.6	25.5	22.9	21.4	20.3	47.5	509.2
55,0°	29.6	26.8	24.0	24.7	25.5	26.4	27.4	24.5	21.8	19.9	18.2	48.2	557.5
57,5°	26.7	23.4	20.9	22.8	24.4	25.6	26.7	23.9	21.2	18.7	16.2	48.7	606.2
60,0°	24.0	21.0	18.4	20.7	22.9	24.5	25.9	23.3	20.5	17.4	14.3	49.2	655.4
62,5°	21.5	18.4	16.3	18.5	20.6	22.1	23.4	20.9	18.5	16.0	13.6	50.0	705.4
65,0°	19.0	16.9	14.7	16.6	18.4	19.6	20.7	18.3	16.0	14.4	13.0	51.1	756.5
67,5°	18.4	15.5	13.7	15.1	16.3	17.3	18.2	15.5	13.0	11.1	9.3	52.9	809.3
70,0°	17.7	14.9	13.2	13.5	13.8	14.3	14.9	12.2	9.7	7.8	6.1	50.7	860.0
72,5°	18.0	15.7	13.6	12.0	10.8	10.2	9.8	7.8	6.1	4.6	3.2	42.6	902.6
75,0°	18.4	15.3	13.2	10.3	7.8	6.7	5.8	4.1	2.4	1.3	0.4	34.3	936.9
77,5°	15.5	13.5	11.9	9.5	7.1	5.3	3.8	2.5	1.5	0.8	0.2	26.3	963.2
80,0°	12.5	11.3	9.9	8.1	6.1	3.9	1.7	1.2	0.6	0.3	0.0	18.8	982.0
82,5°	9.6	8.2	6.6	5.4	4.3	2.9	1.3	0.8	0.4	0.2	0.1	11.5	993.5
85,0°	6.6	5.1	3.8	3.2	2.7	1.8	0.9	0.5	0.3	0.2	0.2	4.4	997.9
87,5°	2.5	1.9	1.4	1.2	1.0	0.7	0.3	0.2	0.1	0.1	0.1	2.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

