

Photometric test report

Family Streetlight 11 micro LED

Order number: 5XC1MC1F08DE
EAN: 4069025076441

LP number
59453_346

serial
documentation
22.05.2024



Version	post-top or side-entry mounting
Optic	direct, asymmetric wide distribution S100001
Cover	transparent, PMMA
Lamps	LED 2700 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Setting	individual position
Rated values	Net luminous flux = 3220 lm Power consumption = 26.8 W Luminous efficacy = 120.1 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 661 cd/klm

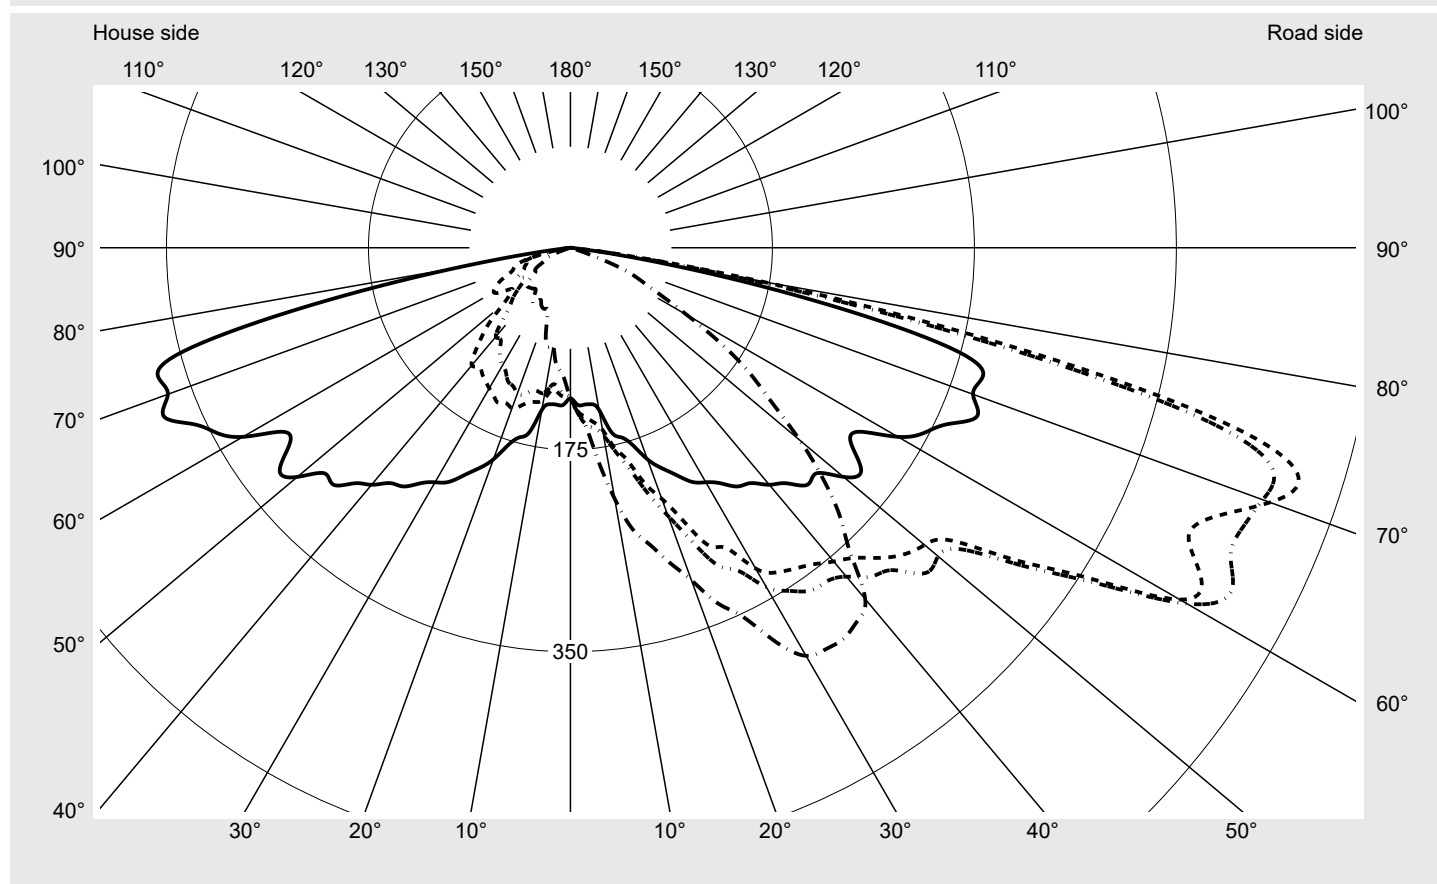

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Measurement conditions


DIN EN 13032 and DIN 5032

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	645.0
Imax 80°	167.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08DE EAN: 4069025076441	LP number 59453_346
Envelope curve in cd/klm KMK 72.5° KMK 70° KMK 67.5° KMK 65°		sit eco

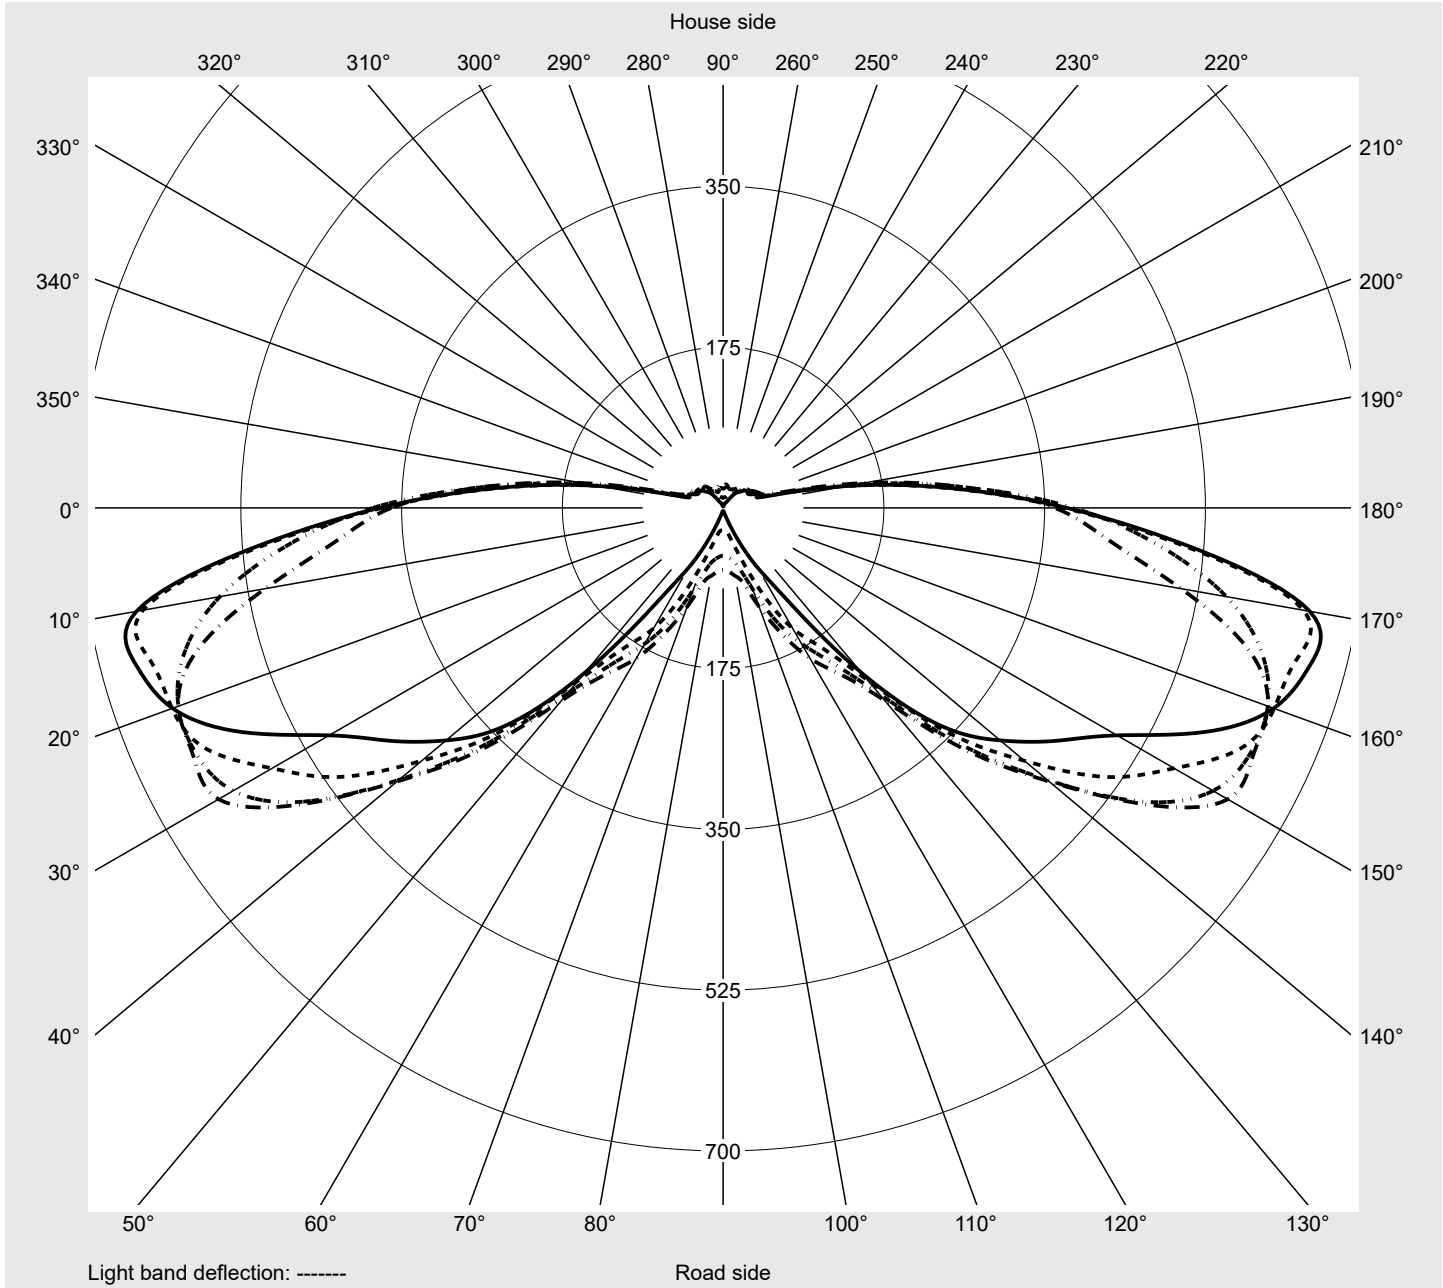

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08DE EAN: 4069025076441	LP number 59453_346
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	136.0	138.5	139.5	141.5	143.1	143.0	142.2	142.5	144.1	144.9	146.0	147.0	146.5
5,0°	136.5	139.7	143.0	147.1	153.5	155.8	154.9	157.2	159.8	161.3	162.4	161.4	159.9
7,5°	136.8	142.1	147.3	152.3	157.6	161.0	165.6	170.9	172.5	171.3	168.7	172.0	177.4
10,0°	142.6	147.8	153.0	160.3	165.1	169.3	177.3	184.1	187.2	191.2	197.2	200.3	201.5
12,5°	163.5	167.3	172.4	177.7	181.1	185.6	192.8	201.2	209.5	215.8	222.2	227.8	228.1
15,0°	170.1	176.4	184.9	190.6	198.6	206.4	211.4	221.4	229.1	235.7	249.5	253.9	257.3
17,5°	179.2	190.7	205.0	214.1	223.0	234.7	240.8	245.8	249.0	249.5	252.7	262.0	271.2
20,0°	195.1	207.0	215.2	231.4	247.2	258.6	268.3	276.9	278.8	279.9	278.5	281.6	289.1
22,5°	206.7	223.1	238.2	256.5	275.4	289.6	298.9	309.0	313.5	307.5	303.6	305.9	310.6
25,0°	217.3	238.7	261.6	285.0	304.1	321.3	330.9	339.9	339.8	328.5	325.0	328.2	331.9
27,5°	228.8	250.7	274.0	293.6	315.7	338.7	353.6	358.1	355.9	348.8	344.1	344.8	350.5
30,0°	234.6	257.8	285.1	320.9	339.6	353.2	369.3	375.8	373.0	369.3	367.3	365.9	370.3
32,5°	242.0	270.2	304.2	333.4	352.5	376.1	390.9	394.3	396.6	397.3	390.7	385.7	391.9
35,0°	252.5	278.7	309.9	339.3	362.7	383.0	387.6	394.2	399.9	400.7	399.8	396.9	399.9
37,5°	257.0	286.3	319.3	345.7	364.5	385.4	398.4	404.7	404.4	401.3	397.7	392.9	395.0
40,0°	268.1	303.0	333.2	354.8	372.0	393.7	405.0	408.1	406.8	400.0	392.0	388.4	386.3
42,5°	276.8	303.3	345.9	364.5	386.3	410.9	422.9	418.4	406.0	399.1	394.1	388.4	385.1
45,0°	290.4	314.6	356.8	380.0	395.0	419.0	427.9	425.9	414.6	410.1	393.1	372.1	367.5
47,5°	289.2	326.3	371.3	392.9	417.2	442.3	443.9	426.0	419.5	419.4	386.4	347.8	344.4
50,0°	308.9	351.5	380.8	400.6	415.9	441.5	454.5	442.7	420.7	400.5	372.2	341.7	317.5
52,5°	317.5	363.9	397.1	416.9	429.8	452.2	458.6	430.6	406.6	377.8	343.7	306.5	283.0
55,0°	297.2	367.5	434.3	472.6	481.5	479.0	482.2	456.7	420.1	362.3	306.7	278.1	254.3
57,5°	296.7	377.7	467.0	532.9	541.4	531.2	516.3	481.5	423.8	352.9	292.5	256.9	237.1
60,0°	327.7	424.7	532.9	609.7	616.7	592.2	550.6	499.9	432.9	346.5	293.2	258.0	225.8
62,5°	346.5	437.1	534.0	615.5	645.4	626.7	593.0	540.4	447.6	365.5	288.9	243.1	205.4
65,0°	361.3	424.1	506.1	591.1	631.1	636.8	634.3	563.0	463.4	371.8	274.1	220.4	189.1
67,5°	381.4	477.6	556.3	606.9	631.1	633.1	615.9	557.5	460.5	362.5	264.1	205.0	170.7
70,0°	371.2	512.4	641.5	645.0	638.4	620.8	567.0	510.7	428.4	345.5	245.1	184.7	151.5
72,5°	374.2	517.9	648.5	661.5	637.8	577.5	495.2	442.1	393.8	335.5	234.2	125.1	75.1
75,0°	347.7	473.1	561.8	587.5	559.1	469.3	379.1	352.4	316.6	217.7	99.9	32.0	9.7
77,5°	231.6	318.2	373.2	380.7	345.4	305.4	256.2	200.5	115.3	39.5	8.3	0.0	0.0
80,0°	101.0	138.7	164.6	167.3	147.4	125.6	89.2	36.7	6.9	0.0	0.0	0.0	0.0
82,5°	20.5	26.6	30.7	35.4	36.7	24.6	7.9	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1MC1F08DE EAN: 4069025076441										LP number 59453_346	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	144.8	144.1	144.5	144.0	142.6	142.1	133.5	131.6	129.3	126.9	125.2	124.6	123.8
5,0°	158.2	157.8	158.6	158.1	156.5	155.6	133.0	130.2	125.9	121.7	119.4	118.0	114.8
7,5°	178.7	179.4	181.1	183.4	185.1	186.9	132.9	129.1	124.4	119.7	116.9	115.9	112.8
10,0°	205.7	209.9	211.3	215.8	220.4	220.8	140.7	137.8	133.5	127.5	121.9	117.7	111.5
12,5°	232.7	236.3	237.8	243.2	249.0	250.1	154.5	145.0	136.9	127.7	121.4	117.1	113.6
15,0°	261.2	261.9	264.6	264.9	265.0	266.5	160.7	148.9	138.6	128.1	120.8	113.7	107.5
17,5°	277.5	280.8	283.9	286.2	285.1	286.2	166.3	155.1	143.7	133.1	121.5	111.5	104.3
20,0°	298.0	303.4	307.6	308.4	304.5	306.5	178.5	161.6	148.0	134.3	118.9	109.4	102.2
22,5°	320.7	328.0	334.6	335.8	333.1	333.4	182.1	163.0	145.8	129.8	117.7	105.7	95.7
25,0°	338.4	346.6	350.8	353.0	353.2	352.4	190.0	168.2	148.2	127.8	111.4	98.7	90.7
27,5°	359.7	366.9	370.6	377.0	383.3	384.8	200.1	173.4	144.1	121.3	106.9	93.9	79.2
30,0°	375.7	381.5	390.6	401.2	407.5	408.3	205.1	174.8	140.7	117.5	99.7	85.4	71.7
32,5°	393.6	392.0	404.9	419.2	418.6	412.3	207.4	171.7	136.9	113.1	95.0	80.0	69.1
35,0°	404.5	402.8	409.9	423.8	420.5	413.2	213.2	170.1	133.3	106.3	88.2	76.3	67.6
37,5°	399.5	403.3	410.9	416.6	412.9	408.1	213.8	171.6	130.0	99.6	82.1	71.8	65.5
40,0°	386.3	392.3	396.4	395.6	396.2	397.4	217.2	175.9	133.0	100.6	81.7	68.4	61.2
42,5°	386.4	382.6	367.3	363.4	362.2	359.2	228.1	176.0	122.2	89.8	74.3	61.1	55.4
45,0°	365.8	359.0	351.7	346.0	334.0	330.8	235.4	171.4	108.4	76.4	69.0	58.8	52.0
47,5°	342.4	323.4	311.8	307.1	297.3	297.4	228.3	158.8	93.8	69.4	63.7	55.9	47.6
50,0°	302.7	287.1	278.3	268.0	258.2	259.5	230.0	147.2	75.7	63.0	57.4	50.4	44.1
52,5°	267.1	256.9	246.3	226.1	218.2	219.8	221.6	132.2	65.8	55.3	48.9	43.5	41.7
55,0°	236.1	223.9	208.7	185.6	183.8	190.1	211.1	127.7	62.2	48.9	42.9	40.1	39.1
57,5°	214.9	185.4	166.0	156.8	153.2	155.2	215.4	136.8	71.9	47.9	41.8	36.8	35.6
60,0°	190.0	155.2	132.8	126.9	120.0	116.8	227.3	144.6	76.8	52.7	46.0	38.9	36.5
62,5°	169.1	132.8	109.1	99.1	89.9	86.8	251.8	153.0	72.6	48.8	41.4	37.5	34.4
65,0°	151.1	114.6	84.7	75.2	69.3	67.5	262.0	156.1	66.1	44.4	40.7	36.8	31.7
67,5°	135.0	94.0	68.0	57.8	53.7	51.9	261.8	147.7	56.2	43.0	38.7	36.4	32.8
70,0°	105.8	62.0	38.0	27.3	24.7	24.3	246.4	137.3	52.4	40.5	36.3	34.4	34.0
72,5°	39.1	15.5	7.3	4.1	3.5	3.4	247.9	137.3	48.9	40.1	34.9	31.0	31.9
75,0°	0.8	0.0	0.0	0.0	0.0	0.0	221.1	119.2	39.4	37.2	34.1	29.4	28.2
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	144.4	78.3	25.0	25.1	25.2	20.5	15.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	62.8	34.1	12.2	12.0	10.8	6.6	2.1
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.0	6.8	2.7	2.6	1.8	0.7	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1MC1F08DE EAN: 4069025076441										LP number 59453_346	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	0.2	0.2
2,5°	122.7	120.0	117.8	117.0	116.9	114.6	112.3	113.9	114.3	113.7	114.7	1.6	1.8
5,0°	111.7	109.2	107.6	107.8	107.6	106.4	106.8	106.6	106.1	106.5	106.6	3.2	5.0
7,5°	109.8	108.4	104.8	100.5	98.9	96.9	95.7	96.6	96.1	97.0	99.1	5.0	10.0
10,0°	107.0	105.7	103.6	102.1	100.6	98.1	97.2	93.4	87.9	86.3	86.3	7.1	17.1
12,5°	108.9	103.0	100.0	97.9	96.7	94.5	92.5	90.1	87.2	86.9	87.7	9.5	26.6
15,0°	102.9	98.9	93.7	89.9	86.2	83.4	81.8	80.9	80.2	81.1	82.5	12.0	38.6
17,5°	97.9	92.0	87.4	83.5	79.7	75.4	71.2	70.8	70.5	69.2	68.3	14.5	53.1
20,0°	94.0	88.2	83.8	80.3	77.8	74.4	69.6	64.6	60.5	58.6	57.5	17.5	70.6
22,5°	87.7	80.7	77.3	76.3	74.7	70.4	67.8	65.8	63.3	59.0	57.3	20.8	91.4
25,0°	82.5	75.7	71.0	69.8	66.1	61.6	60.8	59.7	57.3	56.8	57.3	24.1	115.5
27,5°	74.4	72.4	69.4	66.4	61.7	58.7	57.3	57.1	56.9	55.4	54.9	27.4	142.9
30,0°	64.9	65.9	63.6	59.1	58.8	59.6	58.4	57.0	54.2	52.0	52.1	30.7	173.6
32,5°	64.8	61.8	58.4	57.3	57.7	56.3	53.8	53.2	53.4	55.5	57.3	34.1	207.7
35,0°	62.9	58.8	54.5	54.8	56.4	52.9	48.3	48.1	53.0	56.5	56.7	36.7	244.4
37,5°	60.6	57.7	54.8	53.1	52.5	52.4	51.6	49.2	49.3	50.9	51.0	38.9	283.3
40,0°	57.8	54.5	53.2	51.0	47.8	47.5	49.6	50.7	50.8	48.8	46.9	40.9	324.2
42,5°	54.2	51.8	48.1	46.9	46.8	48.5	49.4	49.8	49.9	48.7	48.0	42.5	366.7
45,0°	52.0	50.5	45.3	46.0	48.5	46.7	50.3	53.4	49.4	48.0	49.1	44.0	410.7
47,5°	44.6	45.0	44.6	44.1	42.0	42.4	45.4	48.7	46.6	46.2	50.1	44.6	455.3
50,0°	42.7	41.3	41.0	44.4	43.6	41.8	43.7	45.3	45.4	47.0	49.3	44.9	500.3
52,5°	42.8	40.1	37.4	40.8	42.8	41.7	39.9	41.4	43.3	44.0	43.9	44.4	544.7
55,0°	39.5	36.8	37.5	39.4	39.1	38.7	37.6	37.9	37.9	37.7	37.2	44.9	589.6
57,5°	37.9	36.2	36.2	35.3	34.2	35.0	34.5	34.9	36.1	36.4	36.3	46.4	636.0
60,0°	36.1	36.7	35.0	31.8	29.8	29.4	31.0	31.5	31.8	32.4	33.0	49.2	685.2
62,5°	31.2	33.6	34.9	30.3	27.4	26.1	26.3	27.8	28.2	27.2	26.2	50.5	735.7
65,0°	29.9	30.4	30.5	26.2	23.6	22.4	21.6	22.8	25.2	25.6	24.1	50.4	786.1
67,5°	30.4	27.7	24.1	21.8	21.1	20.1	18.3	18.6	21.4	21.9	20.8	50.7	836.8
70,0°	32.0	26.4	22.3	18.3	17.7	16.6	13.9	12.3	12.1	11.4	10.9	49.4	886.2
72,5°	29.0	24.5	20.6	12.7	7.4	6.2	4.3	2.6	1.9	1.7	1.6	45.6	931.7
75,0°	24.1	16.9	8.6	3.1	0.8	0.2	0.0	0.0	0.0	0.0	0.0	36.5	968.3
77,5°	10.3	3.7	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.7	990.0
80,0°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.4	998.4
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.6	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08DE EAN: 4069025076441	LP number 59453_346
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	3220	26.8	27.3	27.0
95	241	252	3055	25.2	25.7	25.4
90	229	250	2903	23.8	24.3	24.0
85	216	248	2738	22.3	22.8	22.6
80	203	246	2573	20.9	21.3	21.1
75	190	243	2409	19.4	19.8	19.6
70	178	241	2257	18.1	18.5	18.3
65	165	238	2092	16.7	17.1	16.9
60	152	235	1927	15.4	15.7	15.6
55	140	232	1775	14.2	14.4	14.3
50	127	229	1610	12.9	13.1	13.0
45	114	225	1445	11.7	11.8	11.8
40	102	221	1293	10.4	10.6	10.5
35	89	216	1128	9.3	9.5	9.4
30	76	210	963	8.1	8.2	8.1
25	63	203	799	6.9	7.0	7.0
20	51	195	647	5.9	6.0	6.0
15	38	184	482	4.9	4.9	4.9
13	34	180	431	4.5	4.6	4.6