

Photometric test report

Family Streetlight 11 mini LED

Order number: 5XC2EC1F08HE
EAN: 4069025076687

LP number
58931_266



Version	post-top or side-entry mounting, Colour Switch
Optic	direct, asymmetric, left wide distribution ZCL0001
Cover	transparent, PMMA
Lamps	LED 4000 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Setting	individual position
Rated values	Net luminous flux = 7530 lm Power consumption = 62.9 W Luminous efficacy = 119.7 lm/W

serial
documentation
24.06.2024

siteco

Luminous intensity in cd/klm


C180-0

C270-90

C335-155

C340-160

Imax: 835 cd/klm

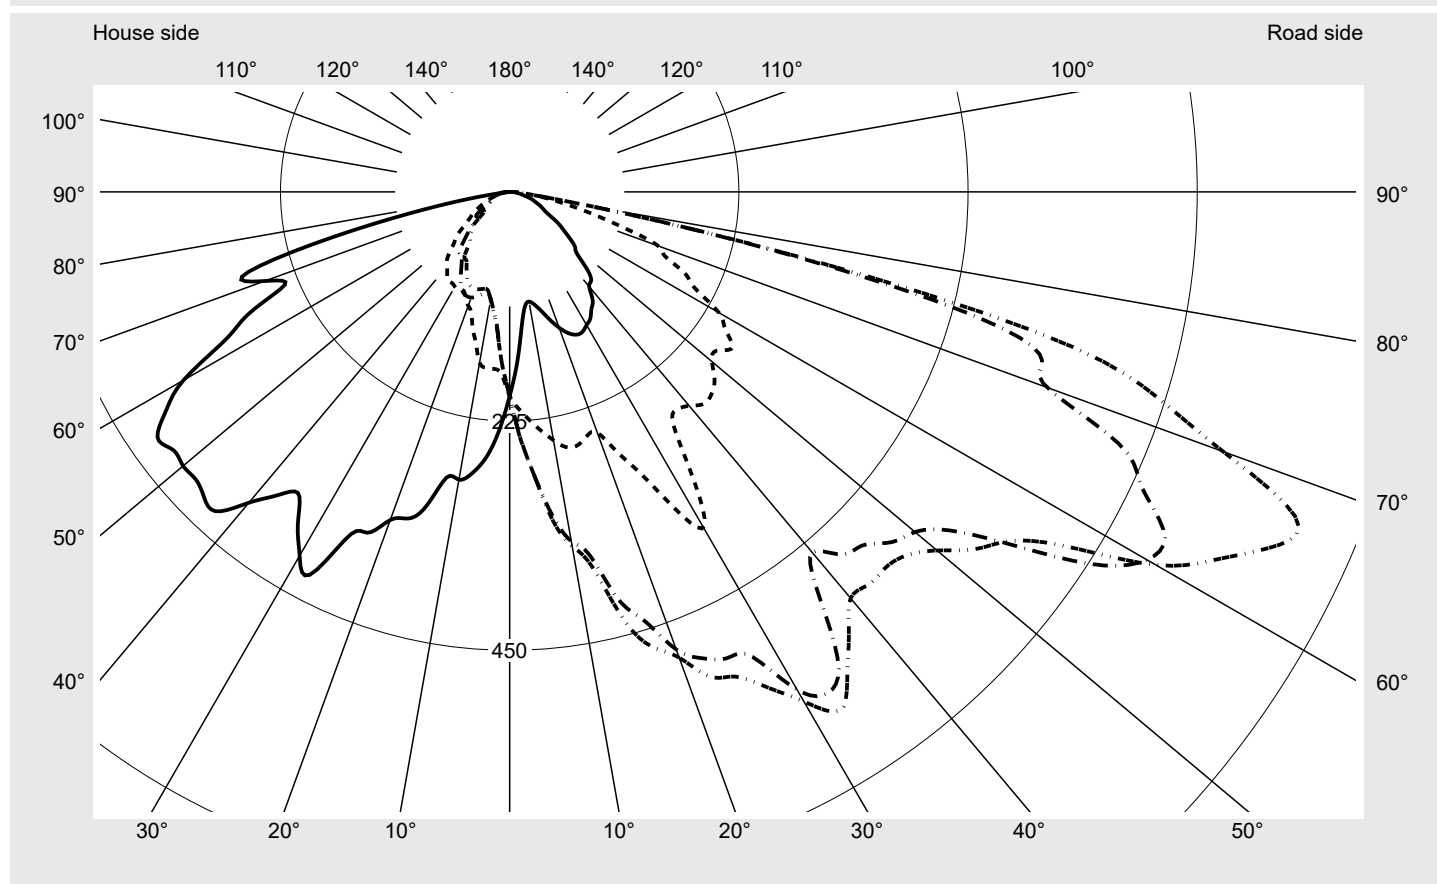

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Envelope curve in cd/klm KMK 67.5° KMK 65° KMK 62.5° KMK 60°		sit eco

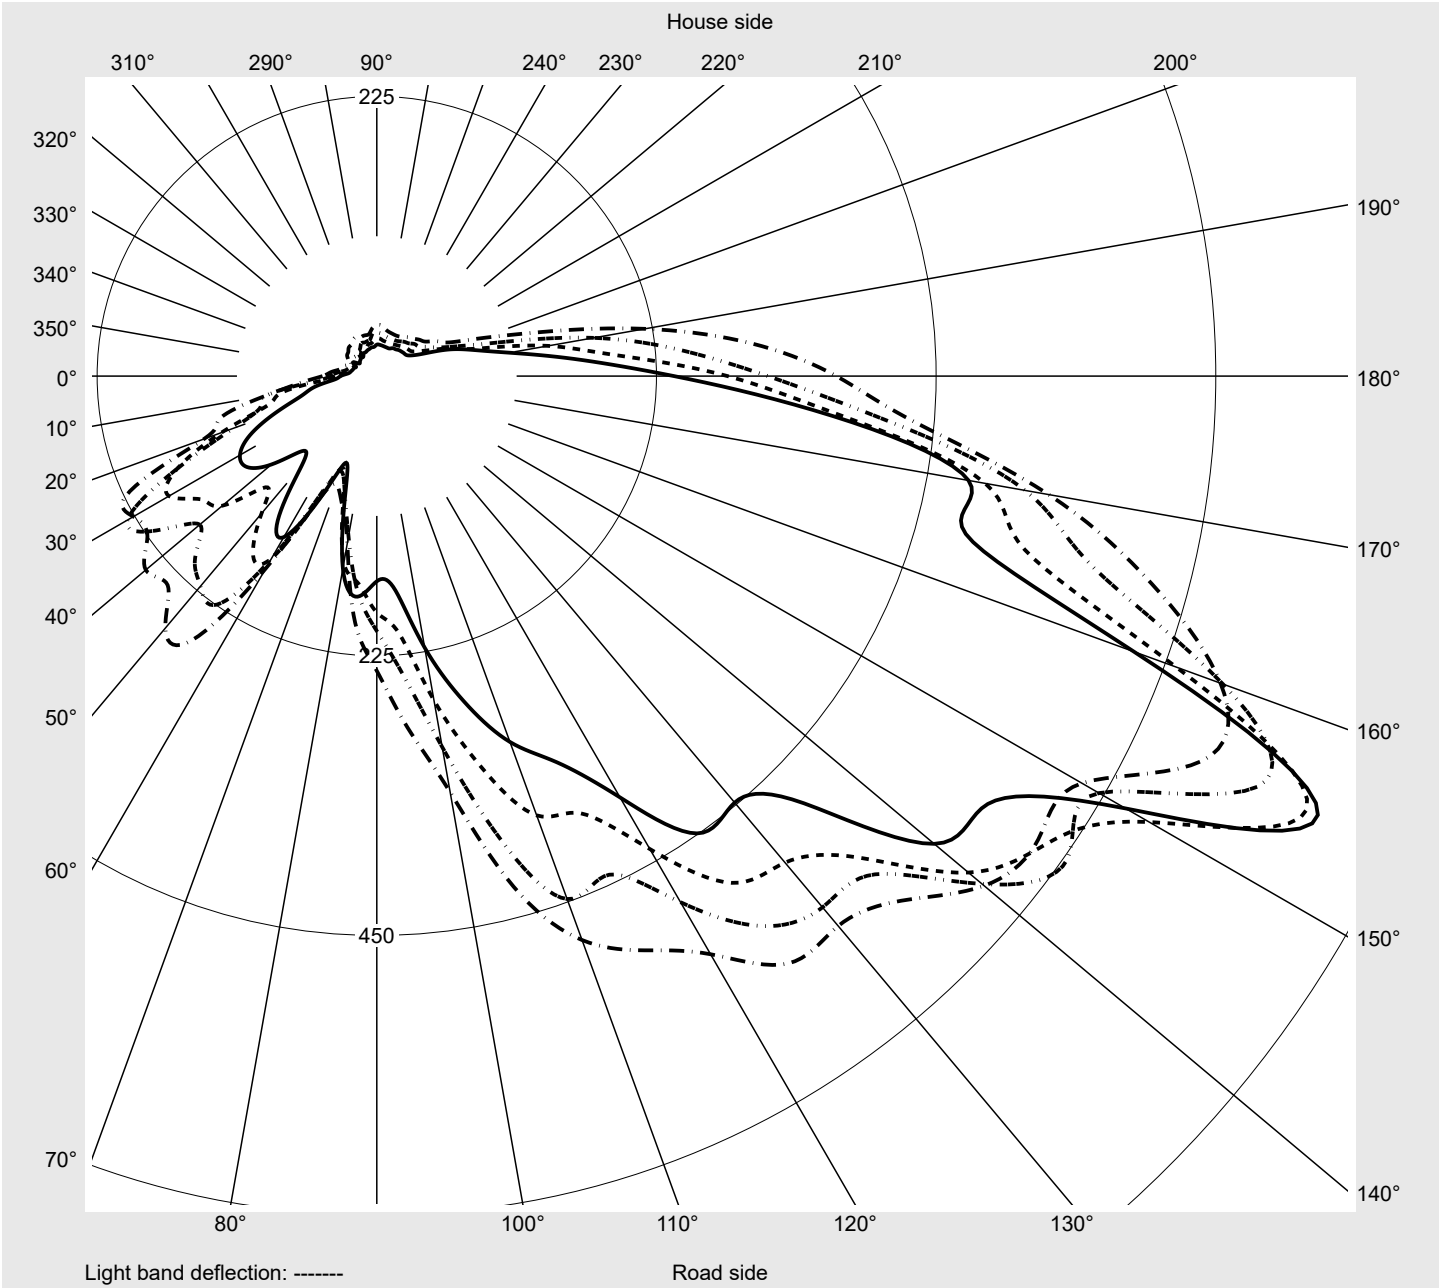

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	167.9	169.0	171.2	173.5	176.5	179.4	180.8	181.8	182.8	184.5	186.5	188.6	190.4	192.8
5,0°	133.9	135.1	138.4	141.8	146.7	150.0	153.9	156.7	161.6	166.9	172.0	176.7	183.4	189.8
7,5°	113.9	115.9	118.8	121.2	125.9	129.4	131.8	134.7	139.8	144.7	150.8	160.2	172.4	177.5
10,0°	109.4	112.0	114.3	116.5	120.0	124.1	126.9	129.0	134.3	141.4	145.7	150.6	157.1	165.1
12,5°	113.7	117.5	119.8	122.4	124.7	127.9	128.1	131.0	132.2	136.9	142.0	153.7	159.8	166.9
15,0°	121.4	126.7	129.2	131.8	133.0	134.5	134.1	134.7	136.1	139.0	141.8	150.4	161.6	167.7
17,5°	131.8	138.6	142.0	144.9	145.5	145.7	143.0	142.2	142.2	144.1	149.4	152.8	156.9	164.3
20,0°	141.8	150.6	155.3	158.1	158.8	158.1	154.9	151.4	150.6	151.4	154.7	154.7	157.5	163.7
22,5°	150.0	161.0	166.9	171.0	172.8	171.8	168.3	162.8	159.4	158.3	157.7	155.1	156.9	164.5
25,0°	154.7	167.3	174.9	180.8	183.7	184.1	180.8	174.3	168.8	165.1	160.6	157.1	157.9	164.7
27,5°	154.9	170.4	180.2	186.5	190.2	192.0	191.0	185.9	180.2	173.0	165.7	160.8	155.9	158.6
30,0°	151.0	167.9	181.6	191.8	195.1	197.1	197.5	194.1	188.8	181.2	173.2	164.1	157.3	158.8
32,5°	147.3	163.2	176.5	188.6	201.8	207.7	204.7	202.6	198.5	191.0	179.8	169.6	159.4	154.3
35,0°	140.0	159.4	177.1	188.3	193.7	206.9	219.6	214.7	206.7	200.0	189.8	175.3	162.4	154.5
37,5°	133.9	149.0	164.3	181.0	199.0	202.2	211.6	227.5	217.5	207.9	196.9	181.6	165.7	154.1
40,0°	121.4	144.1	162.8	178.3	183.9	201.6	218.1	223.6	234.9	218.8	205.7	188.3	167.1	151.6
42,5°	118.4	136.7	150.0	167.9	191.4	199.0	210.0	228.7	235.9	238.3	209.8	192.8	165.5	149.6
45,0°	107.5	125.7	147.1	173.9	190.4	192.6	215.3	224.3	248.1	243.9	223.0	191.8	165.9	144.7
47,5°	89.4	110.4	143.5	160.2	175.5	191.6	211.4	231.0	241.4	260.2	232.6	194.7	162.6	141.6
50,0°	83.7	103.7	124.1	160.8	170.6	191.4	211.6	230.2	249.6	260.4	251.0	204.1	161.8	136.3
52,5°	73.7	99.8	119.0	155.9	201.4	184.3	197.9	232.8	248.3	261.2	270.6	224.7	170.6	129.2
55,0°	63.9	86.7	113.7	151.4	207.9	211.4	202.4	221.2	245.9	266.5	270.4	239.6	177.9	136.9
57,5°	54.9	70.0	100.8	141.6	194.7	242.8	208.5	216.7	251.4	256.1	276.3	253.8	177.3	123.9
60,0°	43.7	61.6	90.6	130.2	147.9	219.2	226.1	225.3	242.6	237.9	264.7	259.6	178.8	108.2
62,5°	37.8	51.2	90.4	96.9	123.0	178.6	231.6	216.5	185.9	206.7	220.8	224.5	169.6	100.8
65,0°	33.7	45.9	78.4	90.8	133.0	177.7	193.0	172.8	162.2	126.5	144.3	173.7	169.2	104.9
67,5°	29.2	34.9	51.2	63.7	86.9	112.6	127.1	127.5	110.6	85.5	93.9	136.9	149.6	109.4
70,0°	25.1	27.3	32.9	43.1	50.2	71.6	75.3	79.2	69.2	73.3	67.3	106.1	116.3	92.0
72,5°	21.6	23.1	25.1	26.5	29.6	34.9	49.6	49.8	55.3	58.6	47.1	63.7	63.9	64.7
75,0°	15.9	17.3	20.8	21.4	23.3	25.3	29.6	36.7	39.2	40.6	38.4	38.8	35.7	46.1
77,5°	12.7	13.7	15.7	16.9	18.4	19.8	22.9	23.5	25.5	26.9	29.0	29.0	29.0	24.9
80,0°	9.8	10.6	11.4	12.9	13.9	14.9	16.9	17.1	18.2	19.4	18.4	19.8	20.6	19.0
82,5°	7.3	7.8	8.6	9.2	10.0	10.8	11.8	12.0	12.7	12.9	12.9	13.5	12.7	13.3
85,0°	5.1	5.5	5.9	6.3	6.7	7.1	7.3	7.8	8.0	8.0	8.0	8.2	7.8	8.4
87,5°	2.4	2.7	2.7	2.9	3.1	3.3	3.3	3.5	3.5	3.7	3.7	3.7	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	196.3	201.2	205.1	209.4	213.6	217.7	220.2	222.6	225.1	228.3	231.0	231.6	232.8	233.0
5,0°	197.7	207.7	214.1	221.2	225.1	230.8	237.5	248.1	261.8	272.0	279.2	286.1	290.2	294.5
7,5°	188.6	200.4	215.3	225.9	236.5	254.7	268.3	283.4	291.4	305.1	324.0	337.3	344.7	341.6
10,0°	181.0	195.7	210.8	228.3	247.5	265.1	294.3	318.7	346.3	370.4	380.4	382.2	387.1	392.6
12,5°	180.2	199.4	216.5	230.2	256.7	277.3	294.3	333.8	357.9	365.9	380.2	399.3	410.4	401.8
15,0°	178.8	196.9	220.8	241.8	257.5	272.0	302.6	323.4	347.5	372.4	387.3	405.1	418.1	426.9
17,5°	176.5	190.4	208.1	227.7	251.6	265.1	297.7	317.7	347.5	377.7	401.4	426.5	459.7	479.3
20,0°	171.8	192.0	212.4	242.2	251.6	282.6	323.0	328.7	367.1	404.0	449.1	469.5	491.2	502.6
22,5°	176.9	196.7	223.2	253.8	276.7	295.7	328.1	351.2	386.3	457.3	492.8	523.0	517.5	522.2
25,0°	173.2	194.7	231.6	270.6	305.9	317.9	341.0	386.3	430.8	472.4	517.7	540.3	552.4	558.7
27,5°	170.6	192.4	237.9	307.5	349.8	368.5	385.3	434.2	475.5	523.2	555.0	566.1	614.4	640.7
30,0°	164.5	183.2	227.9	291.0	380.6	377.3	411.6	476.5	518.7	534.2	565.4	601.8	647.9	649.5
32,5°	158.3	177.7	209.2	265.3	337.5	338.3	409.1	502.0	548.3	579.3	608.3	657.7	686.7	673.8
35,0°	154.9	167.9	187.3	235.3	280.8	327.3	418.7	514.6	594.0	635.8	669.3	716.7	733.4	719.9
37,5°	153.2	162.4	175.9	214.7	269.4	337.1	427.3	508.1	602.4	678.3	729.7	772.4	773.8	741.8
40,0°	147.5	158.1	169.4	202.4	274.3	351.8	456.3	540.1	627.3	693.2	736.9	783.8	768.9	792.2
42,5°	142.6	155.7	168.6	201.2	282.2	373.4	489.3	560.3	625.2	689.7	716.7	754.0	786.8	747.5
45,0°	138.6	149.8	165.7	206.1	280.4	372.4	494.4	555.9	648.9	678.5	729.5	741.1	764.8	757.7
47,5°	135.7	144.1	167.7	204.7	272.8	363.6	474.6	546.1	636.0	674.4	718.9	731.3	744.4	723.6
50,0°	130.0	137.9	169.6	212.8	259.2	340.6	447.3	513.8	596.1	666.5	687.5	716.2	718.5	679.5
52,5°	121.8	129.4	161.0	207.7	256.1	319.1	403.4	493.8	585.6	636.5	659.5	686.0	685.6	657.1
55,0°	114.7	124.5	163.2	222.0	266.7	305.5	382.6	485.3	576.9	597.1	625.4	632.4	641.6	628.3
57,5°	105.1	118.2	150.6	208.5	251.0	309.8	344.9	471.8	528.7	557.5	567.1	608.7	599.9	604.8
60,0°	93.5	107.5	136.5	199.4	237.1	283.8	340.0	425.3	482.8	509.7	537.1	576.9	577.5	596.9
62,5°	82.0	99.2	131.0	174.7	205.1	241.0	303.0	386.5	447.7	442.6	488.7	540.1	557.9	566.9
65,0°	79.0	104.1	152.6	167.7	190.2	208.1	264.9	326.1	376.1	388.1	439.3	497.7	511.0	547.7
67,5°	74.5	97.7	157.1	178.1	165.1	173.2	221.8	271.0	313.2	342.8	391.4	449.1	447.9	486.1
70,0°	73.9	83.3	127.1	166.1	155.3	146.5	179.4	226.9	255.1	291.0	324.2	392.2	401.0	436.5
72,5°	49.2	47.5	83.9	115.3	118.6	116.5	133.0	181.6	190.2	217.5	259.4	302.8	319.4	364.2
75,0°	29.6	31.4	44.3	67.1	85.1	92.6	107.5	128.4	129.2	162.4	216.7	273.2	266.7	250.4
77,5°	24.3	25.3	29.8	42.6	58.8	66.5	79.2	89.8	91.8	116.9	156.5	205.1	193.4	169.0
80,0°	19.0	20.6	21.4	27.1	38.0	43.7	54.9	61.4	64.7	68.4	86.7	98.5	77.7	98.5
82,5°	16.1	15.5	14.5	17.3	23.1	28.4	34.1	39.0	41.6	41.4	41.6	40.0	33.9	35.7
85,0°	10.0	8.4	7.1	8.8	11.6	15.3	17.8	20.0	22.0	21.4	18.8	16.5	14.3	12.7
87,5°	3.1	3.3	2.7	2.9	3.9	4.7	6.1	7.8	7.8	7.3	6.7	6.5	6.5	6.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	235.3	237.7	241.0	242.8	241.6	240.8	237.3	234.9	234.1	227.3	224.3	222.0	219.2	215.1
5,0°	292.2	284.7	280.4	280.2	280.2	280.4	280.2	274.7	261.2	251.2	241.6	235.5	231.8	227.3
7,5°	337.7	334.2	330.8	325.7	320.2	312.2	296.7	285.5	278.1	269.8	260.4	249.4	243.0	238.1
10,0°	385.5	377.7	367.9	353.0	348.1	333.2	317.5	306.5	286.9	273.8	263.6	251.4	241.0	234.9
12,5°	396.5	397.1	389.1	378.3	366.3	341.4	325.9	311.6	287.5	272.0	258.5	244.3	234.1	226.1
15,0°	437.7	454.0	454.0	436.1	415.1	395.9	375.3	348.3	321.0	295.7	281.2	262.4	237.5	219.2
17,5°	496.7	492.8	490.4	468.7	442.0	420.2	394.9	373.0	336.3	298.3	277.9	262.4	241.6	222.0
20,0°	509.9	516.5	499.3	486.7	478.1	451.8	414.0	381.8	342.8	312.6	299.6	269.8	231.2	213.6
22,5°	523.0	528.3	527.7	515.2	495.7	462.8	420.0	388.5	362.2	323.2	287.5	267.9	236.3	212.2
25,0°	591.8	571.6	554.8	525.0	505.0	494.0	474.6	427.1	372.0	328.3	300.6	259.8	224.7	200.8
27,5°	634.2	613.0	576.5	548.5	514.0	496.1	493.6	473.2	423.4	358.5	306.3	262.4	231.8	203.9
30,0°	622.2	609.5	620.1	577.7	564.4	545.0	479.7	439.7	412.4	357.3	304.0	260.6	227.3	200.6
32,5°	661.1	654.6	636.5	603.4	582.8	557.3	500.6	449.1	387.1	353.6	309.4	259.8	229.2	197.9
35,0°	685.4	639.3	638.5	577.9	562.0	492.2	441.8	404.6	361.6	339.8	303.6	254.9	221.0	195.5
37,5°	690.1	660.1	599.9	547.1	498.1	448.7	418.1	403.4	375.7	361.2	333.4	262.4	232.0	194.3
40,0°	724.4	662.4	580.1	520.8	462.0	438.5	417.9	408.5	398.3	366.5	346.7	262.6	226.9	186.3
42,5°	718.5	635.0	558.7	522.4	482.8	445.5	428.3	426.5	425.5	386.5	343.8	274.3	231.8	168.1
45,0°	697.5	603.2	563.4	521.8	490.6	464.6	437.7	435.9	424.2	405.9	333.6	288.9	221.8	144.1
47,5°	654.4	596.5	572.0	528.3	508.9	480.4	448.5	426.1	417.9	405.9	339.1	287.3	203.9	127.5
50,0°	642.0	607.3	586.9	547.7	519.5	489.3	481.0	440.6	418.5	398.9	336.7	268.9	180.6	114.5
52,5°	649.7	628.7	598.9	576.1	546.3	507.7	490.4	441.6	416.3	401.2	318.1	255.7	144.5	101.0
55,0°	618.7	641.6	620.3	597.9	605.4	548.3	494.0	451.2	421.8	390.0	303.2	237.3	111.8	88.4
57,5°	637.3	633.2	630.5	647.5	680.9	614.8	545.7	460.2	400.2	352.8	257.5	196.1	108.2	74.5
60,0°	637.9	649.7	655.0	732.6	722.4	645.4	548.9	436.5	369.8	302.4	219.0	136.9	89.0	64.1
62,5°	635.6	678.1	670.9	781.7	724.4	597.7	529.7	412.4	314.7	244.1	177.1	106.5	70.6	54.5
65,0°	621.4	656.9	717.5	825.4	684.4	539.7	497.1	378.3	282.2	193.2	140.0	86.1	64.9	50.2
67,5°	585.4	600.1	695.6	835.4	648.3	490.6	483.4	368.1	239.2	159.0	108.4	81.0	62.9	43.7
70,0°	510.8	559.9	645.6	745.4	561.4	494.8	476.9	379.3	255.9	158.6	93.5	72.2	52.4	34.7
72,5°	396.5	464.8	568.7	663.8	547.9	489.1	448.3	380.6	275.1	162.2	86.1	61.8	37.5	28.2
75,0°	283.4	345.7	487.3	543.6	476.7	434.2	388.5	315.3	204.5	90.0	57.7	48.4	25.3	22.9
77,5°	172.8	199.0	248.5	275.5	266.1	278.1	224.7	180.8	112.2	64.3	41.6	33.3	20.0	16.7
80,0°	98.7	99.8	99.1	82.4	82.0	96.9	72.4	55.1	47.7	29.0	24.1	21.6	15.9	10.4
82,5°	37.8	41.6	31.6	23.5	21.4	18.4	15.9	14.1	12.2	11.0	9.6	8.4	7.6	6.9
85,0°	12.0	12.0	12.0	12.0	11.4	10.8	9.8	8.8	8.0	6.7	5.9	5.1	4.7	4.3
87,5°	7.1	7.3	7.6	7.6	7.1	6.7	6.1	5.3	3.5	4.1	3.5	3.1	2.7	2.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	210.8	209.0	206.3	204.5	201.4	199.4	196.3	192.8	189.2	186.5	184.5	182.6	179.6	177.1
5,0°	223.4	220.8	213.6	205.1	197.3	190.0	184.5	181.4	179.8	179.0	177.5	176.7	174.5	172.4
7,5°	230.6	225.3	219.0	211.6	196.3	190.0	188.3	185.7	179.8	173.2	169.8	174.7	174.3	173.7
10,0°	232.4	227.9	226.7	218.1	198.8	189.8	178.3	171.2	170.2	169.8	170.4	168.8	170.2	165.1
12,5°	220.8	218.1	206.9	202.0	179.8	170.6	164.7	163.7	158.6	158.3	156.1	157.3	152.6	147.7
15,0°	209.4	203.9	196.9	184.5	165.1	159.6	149.0	149.6	148.8	146.5	143.9	143.2	139.8	128.8
17,5°	205.9	191.8	182.0	179.6	172.6	155.1	146.9	141.8	139.2	135.7	129.4	126.7	124.9	121.2
20,0°	199.2	184.9	176.9	171.6	168.8	161.2	151.6	142.4	134.9	126.3	121.4	118.8	119.0	111.0
22,5°	190.8	175.7	161.4	156.7	156.5	152.6	149.4	141.2	134.3	131.0	123.3	118.6	112.8	99.0
25,0°	182.8	165.9	152.6	143.7	138.4	134.1	136.1	132.6	127.7	132.4	124.5	116.3	107.1	97.1
27,5°	177.3	158.8	145.1	136.7	129.6	123.9	119.8	119.4	119.2	122.6	118.4	117.1	108.4	97.3
30,0°	172.8	154.3	142.8	130.8	122.8	115.9	111.0	114.5	116.9	112.2	114.7	114.3	107.5	100.4
32,5°	173.7	150.8	135.5	125.3	115.1	107.3	103.1	105.9	106.1	100.8	106.7	108.2	105.9	103.1
35,0°	165.1	138.8	127.5	113.5	105.5	98.4	94.7	94.3	97.3	92.4	95.5	104.5	105.9	100.8
37,5°	150.6	127.9	116.9	105.3	94.5	87.9	85.7	85.7	87.1	84.1	84.5	97.9	100.8	95.5
40,0°	135.3	116.7	105.9	93.9	84.7	78.2	76.3	78.2	79.8	76.9	77.5	84.9	95.9	90.8
42,5°	129.0	109.8	96.5	84.1	76.3	71.0	70.2	71.2	71.4	70.8	72.6	79.6	91.4	87.3
45,0°	121.2	102.0	90.0	76.9	70.2	66.1	64.9	64.9	65.3	66.3	69.4	73.3	82.8	80.4
47,5°	112.0	97.3	82.6	72.6	65.9	61.6	60.0	60.2	60.2	62.0	67.7	70.0	73.9	74.7
50,0°	100.2	89.4	76.1	66.3	61.4	57.1	55.3	54.5	55.3	56.9	61.8	63.3	68.4	65.7
52,5°	89.6	79.0	67.5	60.8	56.1	52.4	50.0	49.4	50.2	51.8	56.9	55.5	58.8	57.1
55,0°	77.3	68.2	59.6	54.5	51.0	47.7	45.3	44.7	45.3	46.9	49.4	50.8	50.6	52.2
57,5°	64.9	57.3	51.8	48.8	45.9	43.3	40.8	40.4	40.6	41.6	43.7	46.9	45.1	44.1
60,0°	56.1	48.4	45.3	42.4	40.6	38.4	36.7	36.1	36.3	36.9	38.6	41.0	40.8	39.0
62,5°	47.1	41.4	40.0	37.1	35.7	34.1	32.6	32.2	32.0	32.4	33.3	34.5	35.1	34.9
65,0°	40.2	34.7	33.3	32.4	31.2	30.0	29.2	28.6	28.2	28.6	29.0	30.2	30.2	28.4
67,5°	33.5	29.4	28.6	28.0	27.3	26.3	25.9	24.5	24.3	24.5	24.9	25.3	25.3	23.7
70,0°	27.8	24.7	24.1	23.7	23.3	22.9	22.4	21.0	20.8	21.0	21.2	21.8	21.0	20.2
72,5°	23.3	20.2	19.8	19.4	19.6	19.8	19.2	18.2	17.5	17.3	17.3	18.0	17.1	16.3
75,0°	17.8	16.5	15.7	15.5	15.9	16.5	16.3	15.1	14.7	14.3	14.1	14.1	13.5	13.3
77,5°	13.3	12.7	12.0	12.0	12.9	13.3	13.3	12.0	11.4	11.2	11.2	10.8	10.4	10.2
80,0°	9.6	9.2	8.8	8.8	9.4	10.0	9.8	9.2	8.6	8.4	8.4	8.0	7.3	6.7
82,5°	6.5	6.3	5.9	5.9	6.1	6.3	6.7	6.3	5.7	5.5	5.7	5.5	4.7	3.5
85,0°	3.9	3.7	3.5	3.5	3.3	3.3	3.3	3.3	3.3	3.3	2.7	2.9	2.9	2.4
87,5°	2.0	1.8	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.2	1.0	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	176.7	177.9	178.8	179.6	179.6	180.4	180.4	178.3	175.3	172.8	170.6	169.8	169.8	169.2
5,0°	170.2	169.2	169.0	168.1	167.7	165.1	156.1	148.4	142.8	140.0	138.4	137.9	136.3	135.3
7,5°	173.0	168.1	159.8	151.8	140.4	129.6	126.3	125.3	124.9	121.2	120.2	119.6	118.8	117.1
10,0°	159.6	156.3	147.7	130.6	124.9	122.6	120.8	116.9	112.6	109.6	108.8	107.7	106.7	106.7
12,5°	141.2	137.7	129.4	120.6	116.5	106.7	102.8	100.4	100.4	99.2	96.7	99.0	101.6	105.1
15,0°	124.9	119.6	110.4	103.3	90.2	87.7	85.9	85.1	85.9	88.2	92.6	98.6	103.9	108.8
17,5°	111.8	100.6	88.6	78.8	75.7	75.7	75.3	76.7	80.4	86.5	93.5	100.2	107.7	114.5
20,0°	94.3	84.3	77.5	72.6	69.4	67.7	69.0	72.4	77.7	84.7	92.4	101.2	110.4	119.2
22,5°	90.2	79.2	70.6	69.0	65.7	65.3	65.3	68.2	73.7	81.0	90.8	100.2	110.6	121.6
25,0°	86.7	76.1	71.6	69.4	65.3	62.6	62.0	63.7	69.2	77.3	86.9	97.3	108.6	121.8
27,5°	88.4	77.5	71.8	70.0	67.3	61.2	57.1	59.8	65.1	73.1	82.0	91.0	103.5	120.2
30,0°	89.6	77.7	73.5	71.0	66.5	59.8	56.9	57.5	61.4	71.8	78.4	84.7	96.1	110.8
32,5°	92.8	76.3	72.8	68.0	63.5	59.8	58.2	58.2	59.2	63.9	70.8	79.4	88.4	104.5
35,0°	86.7	75.9	71.6	63.9	63.5	60.4	60.4	58.8	57.5	58.2	64.5	77.5	81.8	98.4
37,5°	82.4	78.8	72.0	64.5	62.4	60.8	61.4	63.5	57.7	53.7	56.5	66.1	77.1	89.4
40,0°	81.4	77.3	73.3	66.7	61.8	58.2	58.0	60.8	58.4	53.3	55.3	60.8	76.9	79.8
42,5°	78.6	70.8	71.6	65.3	61.4	58.8	57.1	58.4	62.4	64.3	56.9	58.2	68.2	76.5
45,0°	71.0	65.9	65.1	59.6	59.0	58.0	55.7	58.4	68.0	68.4	52.2	51.8	59.2	67.7
47,5°	65.3	61.4	58.8	56.3	53.1	48.6	58.2	68.4	68.2	57.5	50.0	48.0	51.2	64.7
50,0°	58.6	59.4	55.1	52.2	49.6	52.4	66.3	81.4	61.0	48.4	42.9	37.1	42.4	51.4
52,5°	51.4	53.3	50.6	48.4	47.3	61.0	74.9	66.1	48.4	40.6	34.9	31.8	40.6	43.5
55,0°	44.7	46.5	45.3	44.1	55.1	71.4	65.9	56.3	40.4	31.6	31.2	34.1	39.8	38.6
57,5°	39.8	39.8	39.2	40.4	46.7	51.8	49.0	41.4	34.7	29.4	28.0	30.0	33.5	31.4
60,0°	34.7	34.1	34.1	33.9	35.5	33.5	32.4	32.0	30.0	29.2	26.5	25.3	25.7	29.2
62,5°	30.2	29.2	28.8	29.2	26.5	25.1	25.3	23.3	23.7	22.9	23.9	22.2	21.6	23.7
65,0°	26.7	26.3	24.3	24.3	23.5	22.2	20.8	21.4	20.2	19.8	21.4	19.6	20.2	21.4
67,5°	23.5	22.7	22.0	21.2	21.0	19.0	19.2	18.6	17.8	17.8	22.0	18.6	19.2	20.0
70,0°	19.4	19.6	19.2	18.4	17.5	16.7	16.1	15.9	15.9	16.5	19.8	17.5	18.0	18.6
72,5°	16.1	16.3	16.1	15.1	14.7	14.5	14.1	14.1	14.3	14.9	15.9	15.7	15.9	16.3
75,0°	13.1	13.3	13.3	12.4	12.4	12.2	12.2	12.2	12.4	12.9	13.3	13.5	13.9	14.1
77,5°	10.0	10.6	10.6	10.0	10.0	10.0	10.0	10.0	10.2	10.6	10.8	11.0	11.2	11.4
80,0°	7.1	7.8	8.0	7.6	7.6	7.6	7.6	7.8	8.0	8.2	8.4	8.6	8.6	8.8
82,5°	4.5	5.7	5.3	5.3	5.3	5.5	5.7	5.7	5.9	6.1	6.1	6.3	6.5	6.7
85,0°	2.9	3.1	3.3	3.3	3.5	3.7	3.9	4.1	4.1	4.3	4.5	4.5	4.5	4.7
87,5°	1.2	1.4	1.6	1.8	2.0	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd / Luminous flux in lm/klm				
0,0°	200.4	200.4	0.3	0.3
2,5°	168.6	167.9	2.4	2.7
5,0°	134.5	133.7	4.8	7.5
7,5°	115.3	113.5	7.3	14.8
10,0°	107.3	107.3	9.9	24.7
12,5°	107.5	110.2	12.2	36.9
15,0°	113.3	116.7	14.9	51.8
17,5°	120.8	125.5	17.6	69.4
20,0°	127.5	134.1	20.6	90.0
22,5°	132.2	140.8	23.7	113.6
25,0°	134.3	144.7	27.0	140.6
27,5°	132.0	142.8	30.9	171.5
30,0°	125.5	138.6	33.9	205.4
32,5°	125.1	135.7	36.8	242.2
35,0°	115.9	126.9	38.9	281.1
37,5°	109.4	122.2	41.1	322.3
40,0°	97.1	109.0	43.3	365.6
42,5°	87.7	103.3	45.3	410.9
45,0°	76.1	92.0	46.9	457.9
47,5°	65.9	80.0	47.9	505.7
50,0°	57.1	70.6	48.6	554.3
52,5°	48.8	56.9	49.2	603.5
55,0°	44.5	51.0	49.8	653.4
57,5°	36.1	44.3	49.8	703.1
60,0°	30.6	36.9	48.9	752.0
62,5°	25.9	31.8	46.3	798.4
65,0°	23.5	27.5	43.5	841.8
67,5°	21.2	23.5	39.4	881.2
70,0°	19.2	20.4	35.2	916.3
72,5°	16.7	17.5	29.9	946.3
75,0°	14.5	15.1	23.8	970.0
77,5°	11.6	12.0	15.3	985.4
80,0°	9.0	9.4	7.8	993.2
82,5°	6.7	6.9	3.8	997.0
85,0°	4.7	4.9	2.0	999.1
87,5°	2.4	2.4	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2EC1F08HE EAN: 4069025076687	LP number 58931_266
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	7530	62.9	66.2	64.6
95	241	252	7145	58.9	62.0	60.4
90	229	250	6789	55.4	58.2	56.8
85	216	248	6403	51.6	54.2	52.9
80	203	246	6018	47.9	50.4	49.2
75	190	243	5633	44.3	46.6	45.4
70	178	241	5277	41.2	43.3	42.2
65	165	238	4892	37.9	39.8	38.8
60	152	235	4506	34.7	36.4	35.6
55	140	232	4150	31.8	33.3	32.6
50	127	229	3765	28.7	30.1	29.4
45	114	225	3380	25.7	26.9	26.3
40	102	221	3024	23.0	24.2	23.6
35	89	216	2638	20.2	21.1	20.6
30	76	210	2253	17.6	18.3	18.0
25	63	203	1868	14.9	15.5	15.2
20	51	195	1512	12.6	13.0	12.8
15	38	184	1127	10.0	10.4	10.2
10	25	169	741	7.6	7.9	7.8
9	22	164	652	6.9	7.1	7.0