

Photometric test report

Family Streetlight 11 mini LED

Order number: 5XC2HC1F08HE
EAN: 4069025225443

LP number
59339_333



Version	post-top or side-entry mounting, Colour Switch
Optic	asymmetric, extremely wide distribution with an additional rear light component (ST0.5ST0.5)
Cover	transparent, PMMA
Lamps	LED 3000 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Setting	factory setting
Rated values	Net luminous flux = 8280 lm Power consumption = 62.2 W Luminous efficacy = 133.1 lm/W

serial
documentation
24.06.2024

siteco

Luminous intensity in cd/klm


C180-0

C192.5-12.5

C195-15

C270-90

Imax: 485 cd/klm

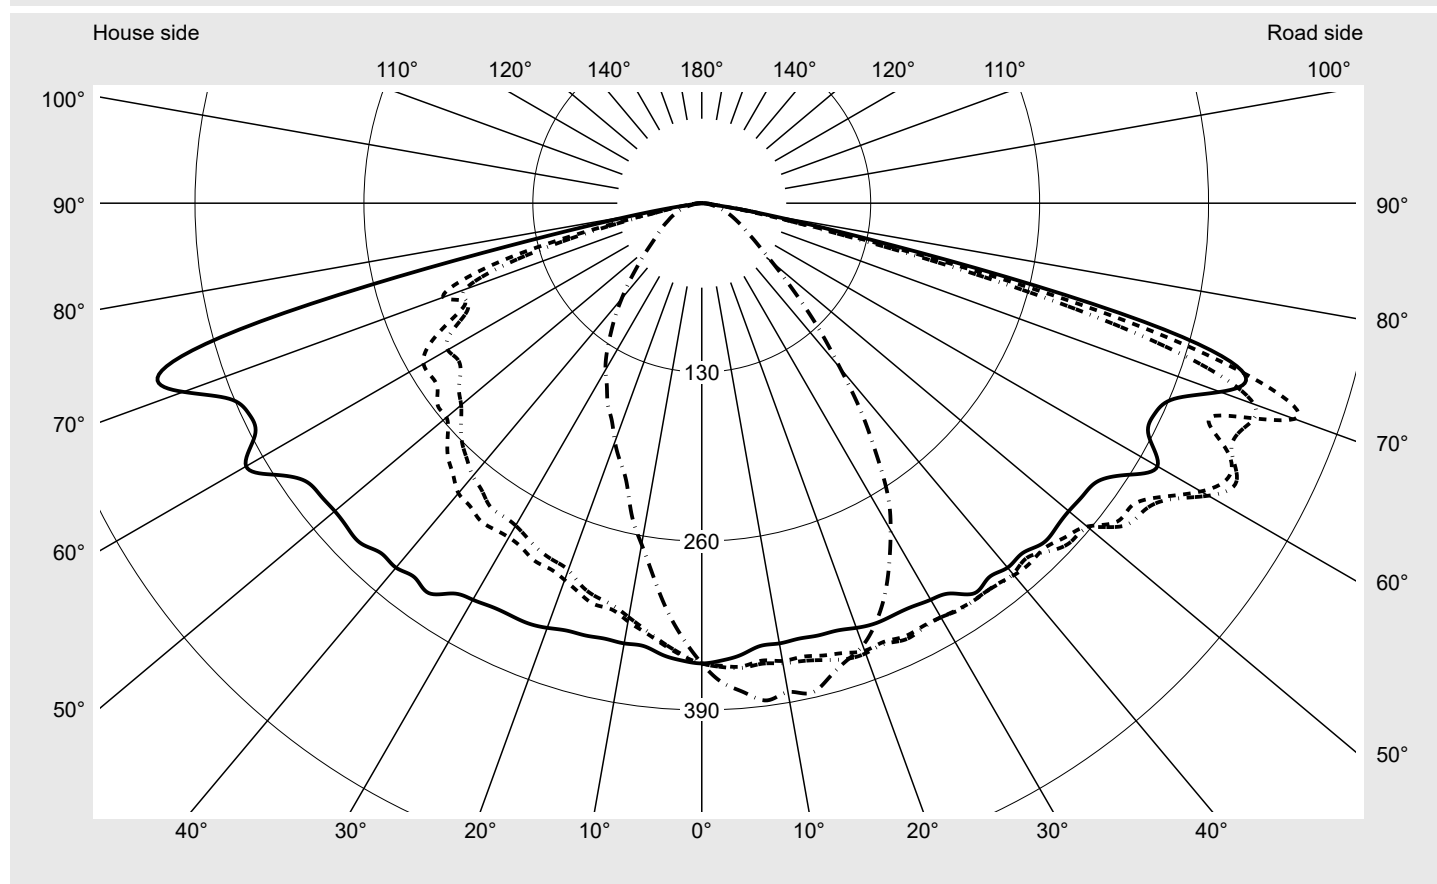

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Measurement conditions


DIN EN 13032 and DIN 5032

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	485.5
Imax 80°	67.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_333
Envelope curve in cd/klm KMK 70° KMK 67.5° KMK 65° KMK 62.5°		

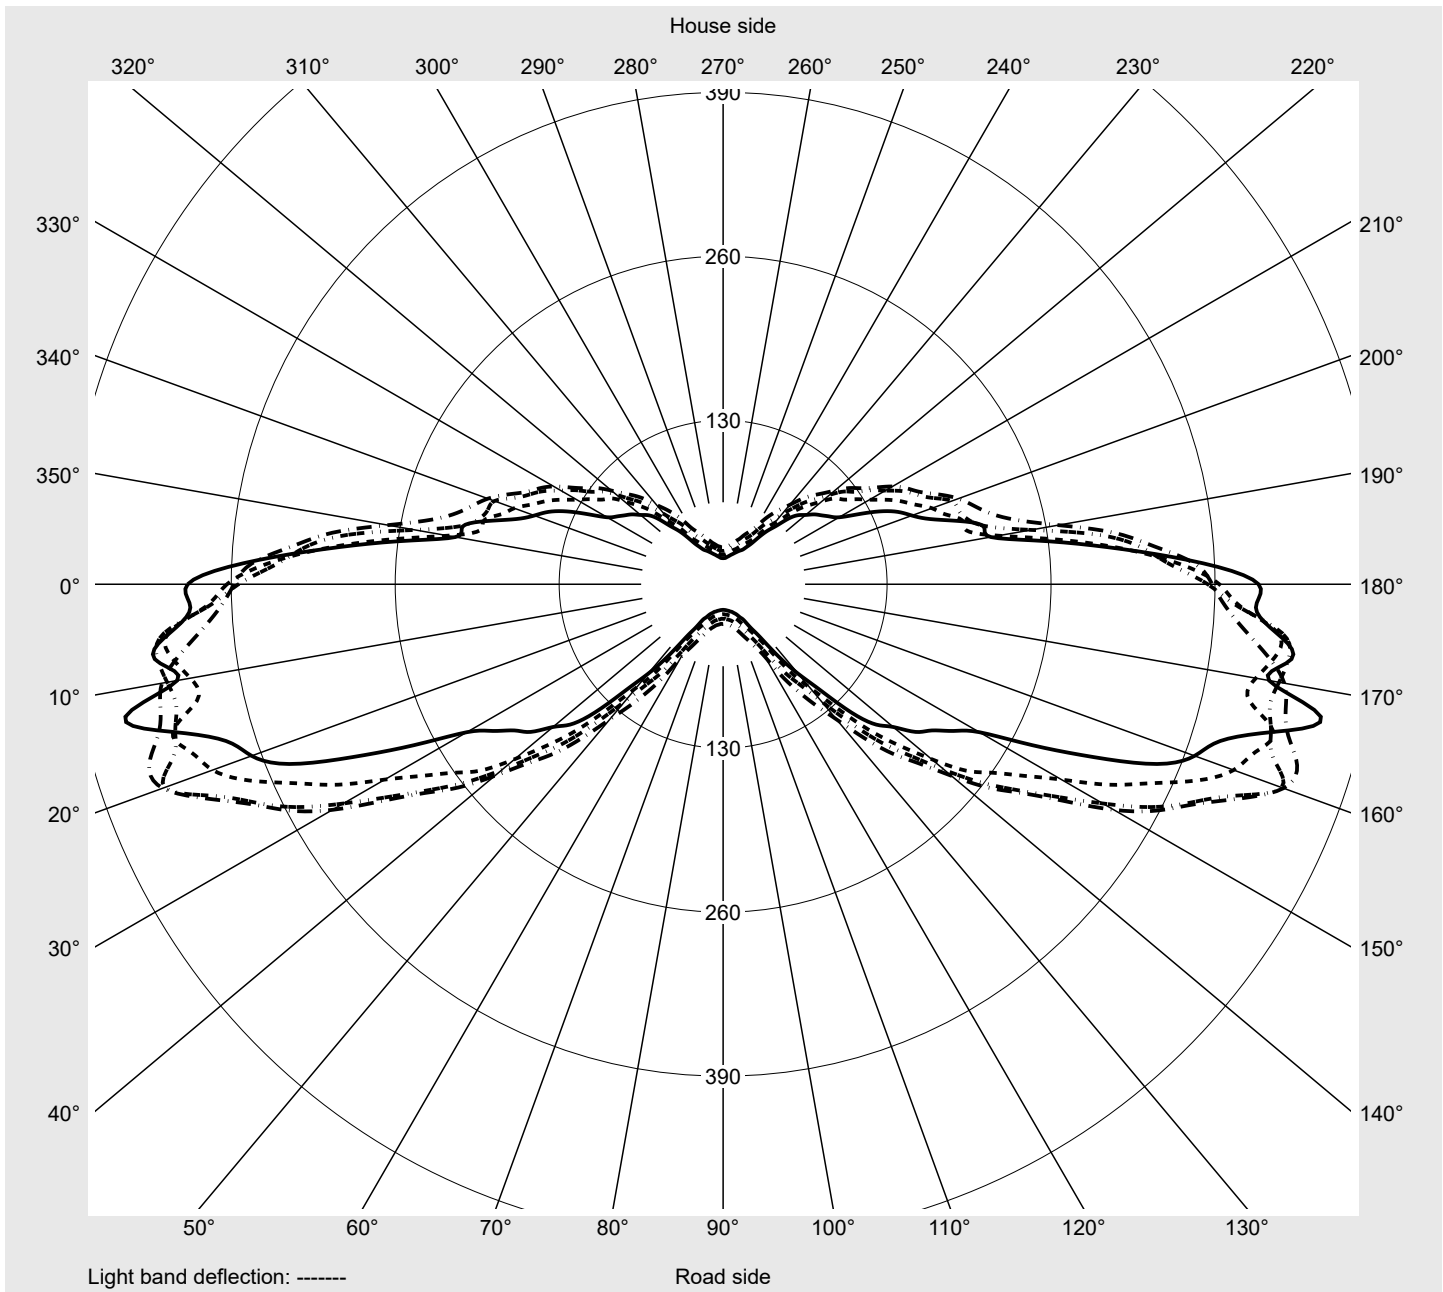

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_333
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	352.2	353.7	353.6	354.5	355.2	356.3	357.3	358.1	359.3	360.3	361.4	361.6	362.5	363.1	364.4
5,0°	348.9	350.4	352.9	355.0	355.9	357.8	358.9	360.2	361.9	363.3	364.6	366.3	367.5	369.4	370.9
7,5°	343.7	345.7	348.5	350.3	352.6	355.0	357.4	360.2	362.6	363.9	366.3	368.4	369.8	370.1	371.3
10,0°	344.0	346.0	348.4	351.2	353.8	357.7	359.5	362.4	366.1	368.0	369.9	370.9	372.9	372.9	374.6
12,5°	343.3	346.8	349.2	351.8	354.6	357.5	360.8	363.4	366.6	369.3	370.9	372.6	373.6	374.9	375.5
15,0°	344.5	349.3	352.8	355.6	357.2	360.4	364.0	366.7	369.8	371.0	372.8	374.2	375.1	377.1	377.5
17,5°	344.9	349.8	353.7	357.2	360.0	363.0	367.8	372.1	372.9	373.1	373.7	374.7	374.8	374.6	375.4
20,0°	347.8	353.8	356.7	361.3	364.1	366.6	368.6	370.3	372.5	374.8	376.2	377.0	377.2	375.3	374.4
22,5°	349.9	355.1	357.8	360.3	363.5	365.5	367.2	368.9	370.7	372.3	372.7	374.2	374.0	373.2	372.8
25,0°	349.7	354.9	358.2	361.9	364.4	368.1	370.5	372.3	371.0	369.6	371.2	369.1	369.0	368.2	364.2
27,5°	350.1	356.6	359.2	364.0	366.5	367.4	368.7	367.1	369.5	369.0	367.9	365.9	364.3	364.7	362.3
30,0°	352.4	358.7	362.9	368.0	369.2	368.0	368.0	367.1	366.8	366.9	366.5	364.0	360.0	358.1	354.2
32,5°	356.1	363.9	366.7	365.9	366.6	369.7	370.6	370.3	368.4	365.5	363.8	361.5	356.7	351.8	347.3
35,0°	366.3	369.7	370.2	371.2	370.3	370.6	370.4	369.0	367.4	364.5	361.6	356.9	351.8	346.3	339.8
37,5°	363.0	370.4	372.4	372.1	372.2	370.7	371.2	370.3	369.3	367.2	359.3	352.7	346.2	341.9	334.5
40,0°	366.1	370.8	371.4	372.0	373.5	373.7	372.7	372.2	366.9	358.9	355.6	352.2	345.4	337.8	323.0
42,5°	365.3	370.9	371.2	371.4	374.9	374.8	370.2	369.5	365.0	357.0	352.6	345.3	335.1	325.5	320.0
45,0°	370.5	375.7	377.4	376.4	376.0	374.4	378.5	375.5	369.3	361.5	353.6	346.2	334.0	323.8	308.8
47,5°	369.8	376.4	376.9	377.8	379.8	380.1	385.5	382.1	375.5	365.9	357.9	346.3	335.0	323.9	310.9
50,0°	368.7	377.2	379.8	381.5	384.6	387.1	388.7	385.1	380.7	376.6	365.6	350.8	335.7	320.6	305.8
52,5°	369.7	379.2	380.8	383.8	396.2	402.7	408.2	401.0	390.7	381.3	371.0	358.2	342.2	325.4	303.1
55,0°	372.7	379.3	379.9	383.0	391.9	404.8	414.1	410.6	401.4	391.3	378.4	363.2	342.3	324.3	307.1
57,5°	389.0	394.5	400.4	405.9	413.2	420.5	424.9	420.7	412.3	397.1	380.9	362.5	342.8	318.0	297.5
60,0°	404.9	409.9	418.7	427.9	442.5	443.6	450.2	449.1	442.2	417.0	389.7	369.9	351.1	320.8	295.0
62,5°	387.8	398.6	415.0	435.3	451.8	456.9	463.9	477.2	472.8	443.8	412.7	388.5	357.7	319.5	288.5
65,0°	384.3	409.1	445.0	452.4	447.6	444.2	449.7	457.3	471.2	438.3	409.5	382.6	347.6	313.6	284.5
67,5°	393.4	410.9	441.4	441.4	428.9	427.4	451.8	442.5	430.7	406.6	373.4	344.2	309.7	282.7	260.5
70,0°	424.6	422.8	440.1	454.6	439.5	485.5	452.2	413.3	397.8	372.4	324.4	276.3	234.6	216.5	202.1
72,5°	438.0	416.1	439.2	466.1	444.6	440.9	388.1	346.1	334.3	303.8	246.4	195.7	160.9	145.0	131.4
75,0°	351.5	331.1	329.2	378.1	328.1	302.9	247.8	217.5	209.5	200.0	168.0	137.7	121.1	112.0	99.9
77,5°	153.4	188.1	189.7	181.6	140.2	118.0	101.0	95.5	96.2	100.9	98.8	90.3	82.9	75.7	63.8
80,0°	50.5	67.9	57.9	44.5	39.4	39.1	46.9	49.3	47.0	42.7	45.1	43.7	39.7	35.6	30.4
82,5°	10.3	10.3	10.1	10.2	10.7	12.0	13.9	12.3	12.7	11.7	12.6	11.6	11.2	11.0	10.8
85,0°	6.2	6.2	6.2	6.1	6.1	6.1	6.0	5.9	5.8	5.6	5.5	5.3	5.1	5.0	4.9
87,5°	3.2	3.2	3.2	3.2	3.2	3.1	3.0	3.0	3.0	2.9	2.8	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_333
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	364.3	365.1	365.8	365.8	365.5	365.4	366.1	366.1	366.9	368.0	368.3	368.8	369.0	369.2	369.1
5,0°	372.6	372.7	374.4	374.5	376.2	377.2	378.2	378.1	378.2	377.9	379.2	379.2	379.0	378.7	378.3
7,5°	372.2	373.0	375.2	377.0	379.0	380.7	382.6	383.5	384.6	384.6	384.8	384.6	385.8	386.3	387.3
10,0°	375.5	375.9	375.9	377.8	378.9	380.5	381.6	383.0	382.4	383.8	384.3	384.5	384.9	385.6	386.2
12,5°	376.3	377.0	377.5	378.9	380.2	383.0	383.5	384.6	383.7	383.7	382.4	382.0	382.8	382.0	381.6
15,0°	377.8	377.5	376.8	376.1	375.8	377.1	377.5	378.5	378.1	377.5	377.4	378.2	377.5	378.9	379.9
17,5°	376.5	376.2	375.8	373.6	371.2	371.4	369.7	369.9	370.4	372.0	370.3	371.5	370.6	371.4	370.4
20,0°	372.8	373.3	373.2	375.5	372.9	370.5	366.2	364.2	361.9	362.7	362.3	362.4	361.6	361.9	360.7
22,5°	372.3	370.2	369.6	367.3	364.1	363.0	360.6	357.1	354.0	352.5	351.2	349.9	350.1	348.1	348.8
25,0°	363.0	361.2	360.4	357.9	354.5	352.2	350.1	348.9	347.5	343.9	341.3	338.8	335.5	333.8	333.2
27,5°	357.7	355.3	351.5	348.4	345.9	342.4	336.3	333.8	332.0	326.7	321.9	318.9	316.8	315.0	313.2
30,0°	350.3	348.1	344.4	337.4	330.6	325.4	322.2	317.4	312.2	307.9	304.0	298.6	295.7	295.2	293.9
32,5°	340.8	333.6	328.9	324.2	318.9	313.0	306.2	299.8	293.8	288.9	283.5	278.1	274.6	271.9	269.4
35,0°	332.1	324.0	315.4	309.9	303.3	295.1	286.0	277.2	269.4	264.4	257.7	252.1	247.9	244.9	242.0
37,5°	324.2	315.3	305.4	297.9	291.8	281.4	271.5	261.3	251.3	242.2	233.2	226.3	222.7	218.0	213.1
40,0°	316.6	306.5	294.1	284.1	274.2	262.4	252.0	239.8	228.9	221.6	213.1	204.3	196.7	189.8	184.7
42,5°	306.4	294.5	283.0	272.1	257.6	243.2	234.5	224.1	212.6	201.6	190.8	181.0	173.2	165.3	159.1
45,0°	295.9	284.8	269.4	256.0	243.0	231.9	219.1	206.3	193.7	181.5	170.7	159.0	151.5	143.1	136.0
47,5°	292.7	276.4	257.1	243.5	228.8	215.6	201.4	188.6	175.0	162.8	151.2	140.4	132.1	124.7	116.8
50,0°	290.2	270.1	249.2	231.2	214.9	197.9	184.8	169.6	156.5	144.6	132.8	122.8	112.7	104.7	97.9
52,5°	282.5	259.8	242.3	217.1	198.4	181.2	166.2	150.7	136.9	126.8	117.7	107.1	98.5	90.0	82.4
55,0°	284.1	257.7	230.1	204.4	183.1	165.1	148.2	131.4	120.2	110.1	101.5	92.5	83.4	75.2	68.4
57,5°	277.1	250.3	225.4	199.2	177.5	160.1	137.7	120.6	107.5	97.0	86.4	77.2	68.9	61.8	56.1
60,0°	271.7	246.7	221.1	197.6	176.9	154.8	129.8	111.7	98.2	86.1	73.0	63.5	56.4	50.5	45.9
62,5°	264.8	236.3	210.0	189.8	165.1	140.0	121.2	103.6	85.7	66.5	57.0	50.5	45.7	41.8	38.5
65,0°	258.3	229.0	201.3	177.5	148.6	121.2	100.8	85.9	67.9	54.3	46.6	41.2	37.5	34.7	32.5
67,5°	242.8	215.7	189.1	163.0	132.3	107.0	87.8	61.6	49.0	42.0	37.3	33.9	30.8	28.8	27.2
70,0°	192.3	176.1	164.8	143.8	113.6	92.8	72.3	51.5	41.4	33.1	29.9	27.2	25.3	24.1	22.9
72,5°	127.9	125.3	123.6	114.2	91.3	79.6	52.4	40.4	31.9	26.1	22.7	21.1	20.2	19.7	19.1
75,0°	87.2	80.4	76.9	69.8	57.4	47.0	31.0	30.1	23.1	19.3	17.9	16.9	16.3	15.8	15.4
77,5°	54.1	49.4	43.0	40.4	36.5	27.1	21.8	20.2	15.8	14.9	14.1	13.5	12.9	12.5	12.1
80,0°	24.5	23.0	21.7	18.0	15.5	14.7	15.1	13.9	11.9	11.2	10.8	10.3	9.8	9.5	9.1
82,5°	9.8	9.6	9.4	8.9	8.8	8.7	8.5	8.3	8.1	7.9	7.6	7.3	7.0	6.7	6.3
85,0°	4.8	4.7	4.7	4.7	4.6	4.6	4.6	4.5	4.4	4.3	4.1	4.0	3.9	3.8	3.7
87,5°	2.5	2.4	2.5	2.3	2.3	2.2	2.1	2.0	1.8	1.7	1.6	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_333
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	368.8	368.7	369.1	369.4	369.9	370.0	369.5	351.3	350.3	350.3	349.4	348.5	347.5	346.6	346.0
5,0°	378.8	379.3	379.3	379.3	378.4	378.0	378.1	347.8	346.4	344.3	342.5	340.9	339.7	338.0	337.1
7,5°	387.1	386.5	387.3	388.3	387.3	386.1	385.9	341.0	337.9	336.2	335.0	333.2	331.2	329.2	327.2
10,0°	387.1	386.1	385.0	384.4	384.3	383.4	382.0	340.4	336.6	333.8	330.4	326.8	323.5	320.9	317.2
12,5°	382.3	383.3	385.7	385.9	386.0	385.9	386.2	338.4	334.9	330.1	323.8	320.3	316.9	311.9	307.5
15,0°	379.6	381.1	382.3	380.7	381.0	379.0	378.1	339.0	334.9	330.7	325.8	319.6	313.6	306.7	299.9
17,5°	370.8	371.7	371.6	372.2	371.2	371.0	369.4	339.2	334.1	326.5	320.3	314.2	308.5	301.1	293.7
20,0°	362.1	361.2	362.0	362.1	361.6	363.0	362.2	342.6	333.4	325.7	317.0	308.6	300.4	293.7	287.0
22,5°	348.3	346.7	346.6	348.8	350.0	349.8	349.7	341.9	332.8	324.4	315.2	304.7	297.7	289.0	281.5
25,0°	332.5	332.7	331.7	332.2	332.5	332.5	333.0	340.7	330.3	320.9	312.0	303.8	295.0	286.4	277.2
27,5°	313.4	313.7	313.3	311.0	311.4	311.8	312.4	343.0	332.1	320.5	310.1	299.3	290.6	281.4	270.5
30,0°	292.3	290.8	288.8	289.1	290.7	290.7	290.7	345.1	332.4	320.1	308.0	297.0	286.5	275.6	264.2
32,5°	266.0	263.9	263.7	262.4	261.8	263.5	266.5	346.7	335.8	321.5	307.7	297.5	285.3	271.5	260.2
35,0°	236.8	234.5	232.7	231.8	232.9	233.9	232.9	352.6	337.5	322.6	310.4	297.7	284.4	269.6	255.5
37,5°	210.5	206.6	204.1	201.1	199.8	200.2	200.5	353.4	339.3	321.8	307.8	293.5	278.3	264.9	252.9
40,0°	180.8	176.8	173.0	170.0	167.6	167.6	165.7	353.9	336.6	318.3	304.3	291.3	274.1	261.5	248.9
42,5°	154.3	149.4	145.4	142.2	138.7	138.0	137.4	351.4	332.1	314.3	298.0	283.3	267.4	253.6	239.0
45,0°	130.4	124.4	119.4	114.8	112.8	111.2	110.9	358.8	333.8	314.6	297.7	276.2	260.8	245.8	226.6
47,5°	108.9	103.2	98.0	93.3	90.5	89.0	88.2	354.8	328.1	304.8	286.0	265.2	251.3	232.6	213.6
50,0°	91.3	85.4	79.8	75.5	72.5	71.3	71.0	355.3	327.6	301.5	277.4	256.4	241.7	220.0	206.9
52,5°	76.0	69.9	65.1	61.4	59.6	58.3	57.8	352.2	319.8	294.3	273.3	256.0	235.6	215.5	199.2
55,0°	62.3	57.1	53.6	51.0	49.8	49.1	48.8	350.0	316.1	287.7	264.0	248.3	226.6	210.6	195.0
57,5°	51.0	47.5	44.7	43.3	42.5	41.9	41.4	370.5	329.9	295.5	264.5	247.3	223.1	206.7	190.1
60,0°	42.7	40.4	38.7	37.6	36.9	36.4	36.5	381.4	344.4	311.0	276.6	247.2	225.8	205.8	195.6
62,5°	36.1	34.6	33.2	32.5	31.9	31.4	31.6	374.3	343.4	312.7	269.9	236.7	218.5	207.9	198.4
65,0°	30.9	29.6	28.8	28.2	27.9	27.4	27.5	355.3	333.3	300.3	248.0	213.1	200.3	195.7	192.9
67,5°	26.2	25.4	25.0	24.4	24.2	23.9	23.8	363.0	319.9	269.7	221.7	197.5	196.1	184.5	176.2
70,0°	22.4	21.7	21.3	20.9	20.5	20.4	20.3	380.9	318.5	260.7	215.5	211.5	193.7	171.9	159.3
72,5°	18.6	18.0	17.7	17.5	17.2	17.0	16.9	359.8	306.3	278.3	225.9	188.4	160.9	138.0	134.1
75,0°	15.1	14.8	14.5	14.1	13.8	13.7	13.7	291.4	253.8	231.4	177.1	131.4	102.2	90.4	87.8
77,5°	11.8	11.5	11.1	10.8	10.4	10.3	10.1	154.9	151.7	125.3	80.6	54.6	46.7	44.8	46.0
80,0°	8.6	8.2	7.9	7.6	7.4	7.2	7.1	63.3	48.9	34.1	30.1	25.4	24.1	25.7	25.4
82,5°	5.9	5.5	5.3	5.0	4.9	4.6	4.6	10.2	9.5	9.1	9.0	9.1	9.9	9.4	9.9
85,0°	3.4	3.1	3.0	2.7	2.6	2.3	2.4	5.9	5.9	5.7	5.6	5.4	5.2	5.1	4.9
87,5°	1.2	1.2	1.1	1.0	0.9	0.8	0.8	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_333
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	346.1	345.7	345.4	345.2	344.6	343.7	343.2	342.5	342.0	341.0	340.2	340.0	339.5	340.1	339.5
5,0°	335.1	333.9	333.3	332.1	330.7	329.5	328.7	327.5	327.4	326.1	324.3	322.8	321.4	320.6	319.9
7,5°	325.3	323.6	322.3	320.1	318.0	316.5	313.7	312.2	310.0	308.4	305.8	304.2	301.9	300.4	298.8
10,0°	313.9	310.8	307.2	303.7	300.9	298.3	295.6	292.7	290.5	288.2	286.1	284.0	281.6	279.4	278.2
12,5°	303.3	298.4	294.7	290.5	286.5	282.3	279.4	275.5	271.6	269.4	267.6	264.3	262.7	260.4	258.3
15,0°	295.6	289.6	283.6	278.6	272.0	266.5	262.1	258.0	255.1	251.3	247.9	245.2	242.6	240.9	238.5
17,5°	286.3	279.3	272.1	265.8	260.0	255.0	249.7	245.4	241.2	236.3	232.2	228.4	225.7	223.6	221.9
20,0°	278.8	270.4	263.1	257.0	252.2	246.7	239.7	233.7	228.3	224.2	219.5	215.1	210.8	207.7	206.0
22,5°	273.0	264.8	257.0	248.2	241.6	235.3	229.8	223.5	217.2	211.7	206.3	202.3	199.6	197.1	194.6
25,0°	267.2	257.4	249.4	241.3	234.0	226.8	219.9	212.9	206.3	200.8	197.0	192.7	189.0	186.1	183.1
27,5°	260.3	250.8	242.0	234.0	225.3	217.4	209.9	202.6	195.8	189.9	186.3	182.6	178.8	175.1	172.0
30,0°	253.7	244.5	234.6	226.2	217.8	207.6	199.7	193.5	187.6	181.6	177.4	173.7	169.5	165.9	162.9
32,5°	249.7	238.2	227.6	216.7	207.5	198.6	191.3	185.5	178.3	171.9	167.9	163.8	160.1	157.1	153.6
35,0°	243.9	232.0	220.1	209.0	199.1	191.5	184.0	176.8	171.0	164.9	159.9	156.0	152.3	148.0	144.2
37,5°	240.2	226.7	212.8	202.0	192.8	184.3	176.3	169.2	163.1	158.4	153.7	149.6	144.2	139.8	136.0
40,0°	232.1	217.0	206.7	196.6	185.6	176.3	168.9	163.4	157.6	151.8	147.4	142.2	136.4	132.0	127.8
42,5°	222.2	209.0	198.8	185.9	176.3	169.4	162.5	156.5	151.0	146.0	140.7	136.2	130.3	125.6	119.9
45,0°	213.6	201.7	187.6	176.7	169.9	163.2	157.5	151.8	146.1	140.4	135.4	129.4	124.3	118.0	112.2
47,5°	201.6	190.4	178.7	172.2	167.0	160.3	153.4	147.2	141.4	135.2	128.5	123.1	118.1	110.7	105.1
50,0°	193.9	181.1	174.1	167.2	161.5	155.9	149.4	143.4	136.3	129.1	121.9	115.9	108.8	102.6	96.3
52,5°	184.7	177.4	172.1	166.1	159.0	152.1	144.9	137.7	130.8	123.2	115.1	108.6	102.0	94.8	88.1
55,0°	184.9	176.0	169.0	162.2	154.2	148.9	141.4	133.0	124.4	115.2	107.4	99.9	92.7	85.9	80.7
57,5°	179.5	171.9	163.4	155.2	148.9	142.6	135.7	127.1	118.9	110.0	102.6	96.0	87.7	79.7	73.6
60,0°	183.1	170.1	162.7	155.5	145.7	138.2	131.4	121.8	114.0	106.1	99.0	91.1	81.9	74.2	67.6
62,5°	185.8	172.9	164.5	155.1	142.7	132.8	125.2	115.5	106.6	99.3	91.2	82.1	75.1	68.3	60.9
65,0°	179.0	168.8	160.0	148.5	138.8	127.8	120.8	110.3	100.1	91.9	81.9	72.3	64.5	58.6	51.3
67,5°	165.0	155.7	145.1	134.0	125.5	117.0	111.8	102.3	93.0	84.1	72.6	63.4	56.0	46.4	41.4
70,0°	149.9	136.6	120.0	106.2	100.0	95.3	91.0	85.5	81.1	74.0	63.3	56.0	47.9	39.9	35.4
72,5°	123.9	106.0	89.8	78.8	72.2	68.3	66.8	65.5	64.5	61.1	53.0	48.1	38.0	33.0	29.5
75,0°	85.5	76.0	66.6	60.9	58.4	54.4	49.8	47.5	45.7	43.6	38.5	34.2	28.2	27.0	24.0
77,5°	48.5	48.7	46.5	44.6	42.3	38.5	35.1	33.6	31.5	30.7	28.8	25.0	22.5	21.2	19.0
80,0°	24.7	26.2	26.3	25.4	24.5	23.0	21.0	20.5	20.3	19.4	18.3	17.7	17.3	16.3	15.2
82,5°	9.8	10.4	10.4	10.8	11.2	11.4	11.3	11.2	11.2	11.3	11.6	11.6	11.4	11.2	11.0
85,0°	4.8	4.7	4.6	4.4	4.3	4.2	4.2	4.2	4.3	4.3	4.6	4.9	5.2	5.5	5.6
87,5°	2.7	2.5	2.5	2.4	2.4	2.3	2.2	2.1	2.1	2.0	1.9	1.8	1.7	1.6	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_333
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	0.5	0.5
2,5°	339.0	338.7	337.7	336.6	335.7	335.7	335.5	335.9	335.5	335.7	335.2	334.7	334.9	4.2	4.7
5,0°	319.4	318.2	317.0	316.1	315.5	314.7	314.4	314.2	314.0	314.1	314.4	313.3	313.3	8.3	13.1
7,5°	297.5	295.2	294.7	292.5	291.5	290.7	290.0	289.3	288.6	288.9	288.4	288.1	288.6	12.2	25.3
10,0°	276.3	274.4	273.1	271.4	270.5	270.1	269.7	268.8	267.8	268.3	267.4	267.0	266.6	15.9	41.2
12,5°	255.4	253.4	252.0	251.1	249.7	248.5	247.3	246.8	246.3	246.3	246.7	246.8	247.4	19.4	60.6
15,0°	237.2	235.8	233.2	231.1	229.6	228.1	228.3	228.1	226.4	225.6	223.7	222.7	223.2	22.6	83.2
17,5°	219.4	217.0	215.1	213.2	211.5	211.6	211.1	211.3	210.6	210.2	209.3	208.7	208.6	25.6	108.9
20,0°	204.5	202.3	200.4	199.1	198.1	197.5	196.9	196.7	195.9	195.2	194.9	194.9	195.4	28.5	137.4
22,5°	191.9	189.4	186.8	185.5	185.2	184.8	183.7	182.5	182.5	182.6	181.7	180.8	180.9	31.1	168.5
25,0°	179.8	178.0	177.1	175.9	173.6	172.3	171.8	172.0	171.4	170.6	170.5	170.8	171.0	33.4	201.9
27,5°	170.3	168.3	165.8	163.0	161.9	160.9	160.5	160.0	159.4	158.8	159.2	159.0	158.2	35.3	237.3
30,0°	160.1	157.8	155.3	153.8	152.1	150.9	150.3	149.6	148.8	148.2	147.9	148.0	148.2	37.0	274.3
32,5°	150.3	147.9	145.7	143.7	141.6	139.8	138.9	138.3	137.0	136.7	136.2	135.8	135.9	38.3	312.6
35,0°	140.5	137.3	134.8	133.0	130.4	127.8	126.4	125.5	124.6	123.3	122.9	122.3	122.1	39.3	351.9
37,5°	131.2	127.4	124.3	121.1	118.7	116.0	114.7	112.7	111.4	110.7	110.3	109.6	109.2	39.9	391.8
40,0°	122.0	118.4	114.9	110.6	107.7	104.9	102.0	100.4	99.0	98.1	96.6	96.0	95.9	40.3	432.1
42,5°	113.8	109.5	105.1	101.1	98.0	93.9	91.7	89.0	87.4	86.0	84.1	83.6	83.5	40.3	472.3
45,0°	106.5	101.6	96.4	92.1	87.8	84.4	81.2	78.1	75.8	74.0	72.9	72.1	71.6	40.4	512.8
47,5°	98.9	93.4	87.9	83.7	79.1	75.1	71.8	68.9	66.1	64.3	63.0	62.4	62.1	40.4	553.2
50,0°	90.5	84.8	79.7	75.5	70.9	67.0	63.7	59.8	57.4	55.9	54.3	53.6	53.3	40.4	593.5
52,5°	82.4	77.7	72.5	68.1	63.7	59.6	56.0	52.4	50.6	48.7	47.3	47.1	46.4	40.5	634.1
55,0°	75.2	71.1	66.0	60.6	56.2	52.7	49.5	46.4	44.4	43.0	42.0	41.5	41.3	40.5	674.6
57,5°	68.3	63.5	58.2	53.5	49.7	46.3	43.8	41.5	39.6	38.3	37.7	37.2	37.0	41.1	715.7
60,0°	61.9	55.6	50.8	46.8	43.8	41.0	38.9	37.0	35.4	34.3	33.7	33.3	33.2	42.3	758.0
62,5°	52.7	47.9	44.6	41.6	38.4	36.4	34.3	32.8	31.5	30.5	29.9	29.4	29.3	42.6	800.5
65,0°	45.4	41.7	39.1	36.4	34.0	32.4	30.6	29.3	28.3	27.4	26.9	26.6	26.4	41.7	842.2
67,5°	38.1	35.8	33.7	31.6	29.8	28.7	27.4	26.2	25.2	24.5	23.9	23.4	23.3	39.6	881.8
70,0°	32.0	30.3	29.0	27.6	26.3	25.1	24.2	23.2	22.4	21.6	21.0	20.7	20.7	37.3	919.1
72,5°	27.1	25.2	24.2	23.4	22.5	21.7	20.8	20.0	19.2	18.3	18.0	17.5	17.6	32.6	951.7
75,0°	22.0	20.9	19.9	19.4	18.7	18.1	17.3	16.7	15.9	15.3	14.8	14.5	14.2	24.1	975.8
77,5°	18.0	17.3	16.5	15.7	15.1	14.4	14.1	13.4	12.8	12.2	11.5	11.3	11.2	13.5	989.3
80,0°	14.5	13.7	13.1	12.4	11.8	11.2	10.6	10.0	9.3	8.7	8.4	8.0	7.9	6.3	995.6
82,5°	10.7	10.3	9.9	9.4	8.8	8.2	7.4	6.8	6.2	5.8	5.5	5.2	5.2	2.5	998.2
85,0°	5.7	5.7	5.6	5.5	5.3	4.8	4.4	3.9	3.5	3.1	2.8	2.1	2.5	1.3	999.4
87,5°	1.4	1.3	1.3	1.3	1.3	1.4	1.3	1.2	1.1	0.9	0.6	0.5	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_333
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	8280	62.2	65.6	63.9
95	241	252	7856	58.5	61.6	60.0
90	229	250	7465	55.1	58.0	56.6
85	216	248	7041	51.6	54.3	53.0
80	203	246	6617	48.1	50.6	49.4
75	190	243	6194	44.8	47.1	46.0
70	178	241	5803	41.7	43.8	42.8
65	165	238	5379	38.5	40.4	39.4
60	152	235	4955	35.4	37.1	36.2
55	140	232	4564	32.5	34.1	33.3
50	127	229	4140	29.4	30.9	30.2
45	114	225	3716	26.5	27.7	27.1
40	102	221	3325	23.8	24.9	24.4
35	89	216	2901	20.9	21.9	21.4
30	76	210	2477	18.1	19.0	18.6
25	63	203	2054	15.4	16.1	15.8
20	51	195	1663	13.0	13.6	13.3
15	38	184	1239	10.4	10.8	10.6
10	25	169	815	7.9	8.1	8.0
8	20	161	652	6.7	7.0	6.8