

Photometric test report

Family
Streetlight 11 mini LED

Order number: 5XC2HC1F08HE
EAN: 4069025225443

LP number
59339_332



Version post-top or side-entry mounting, Colour Switch
Optic asymmetric, extremely wide distribution with an additional rear light component (ST0.5ST0.5)
Cover transparent, PMMA
Lamps LED 2700 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Setting individual position
Rated values Net luminous flux = 7510 lm
 Power consumption = 60.5 W
 Luminous efficacy = 124.1 lm/W

serial
documentation
24.06.2024

siteco

Luminous intensity in cd/klm


C180-0

C192.5-12.5

C195-15

C270-90

Imax: 485 cd/klm

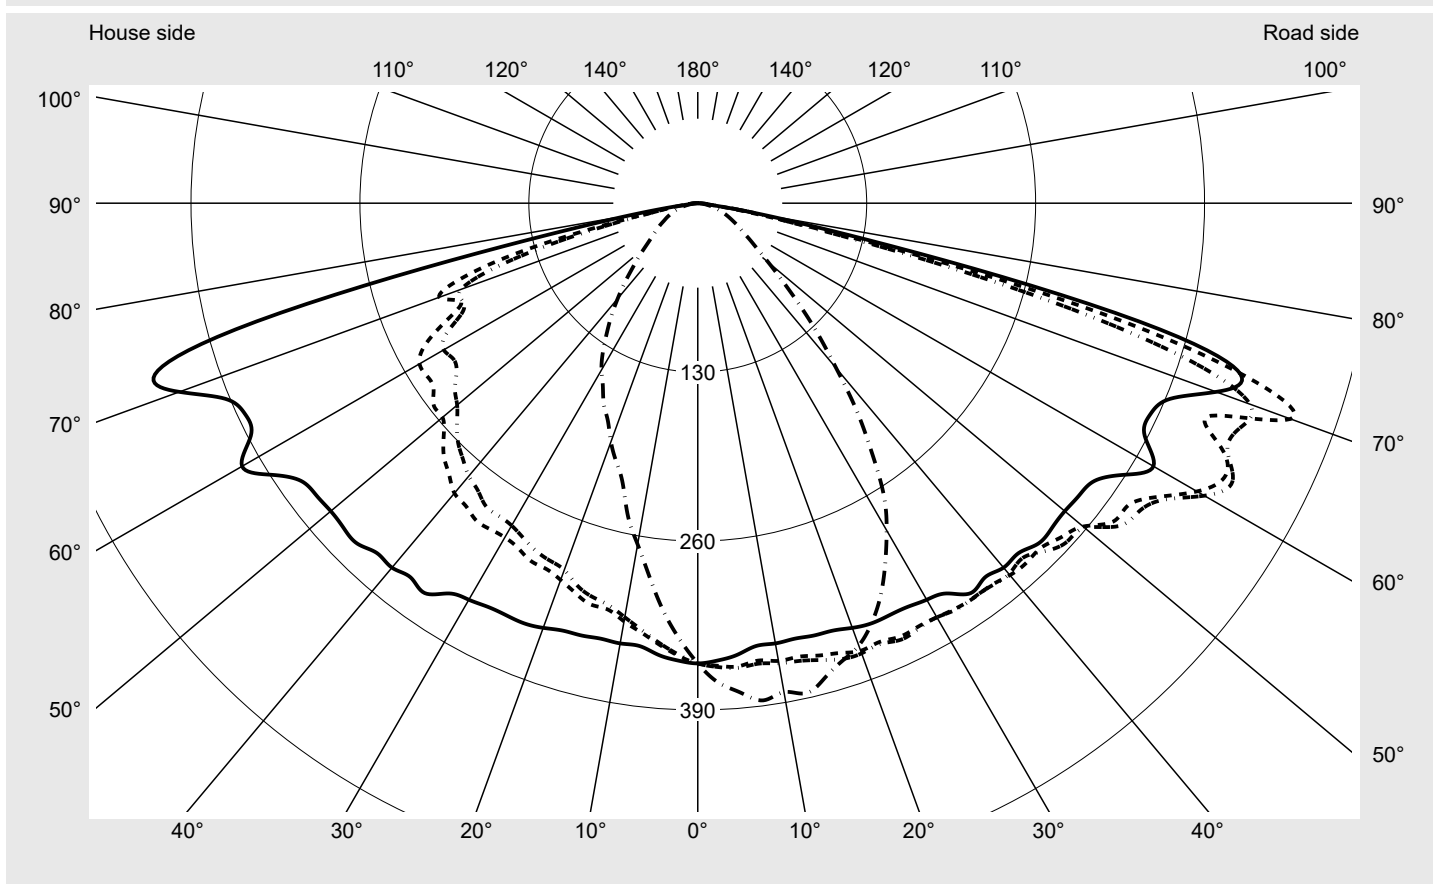

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	485.5
Imax 80°	67.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 11 mini LED

Order number: **5XC2HC1F08HE**
EAN: **4069025225443**

LP number
59339_332

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

sit^eco

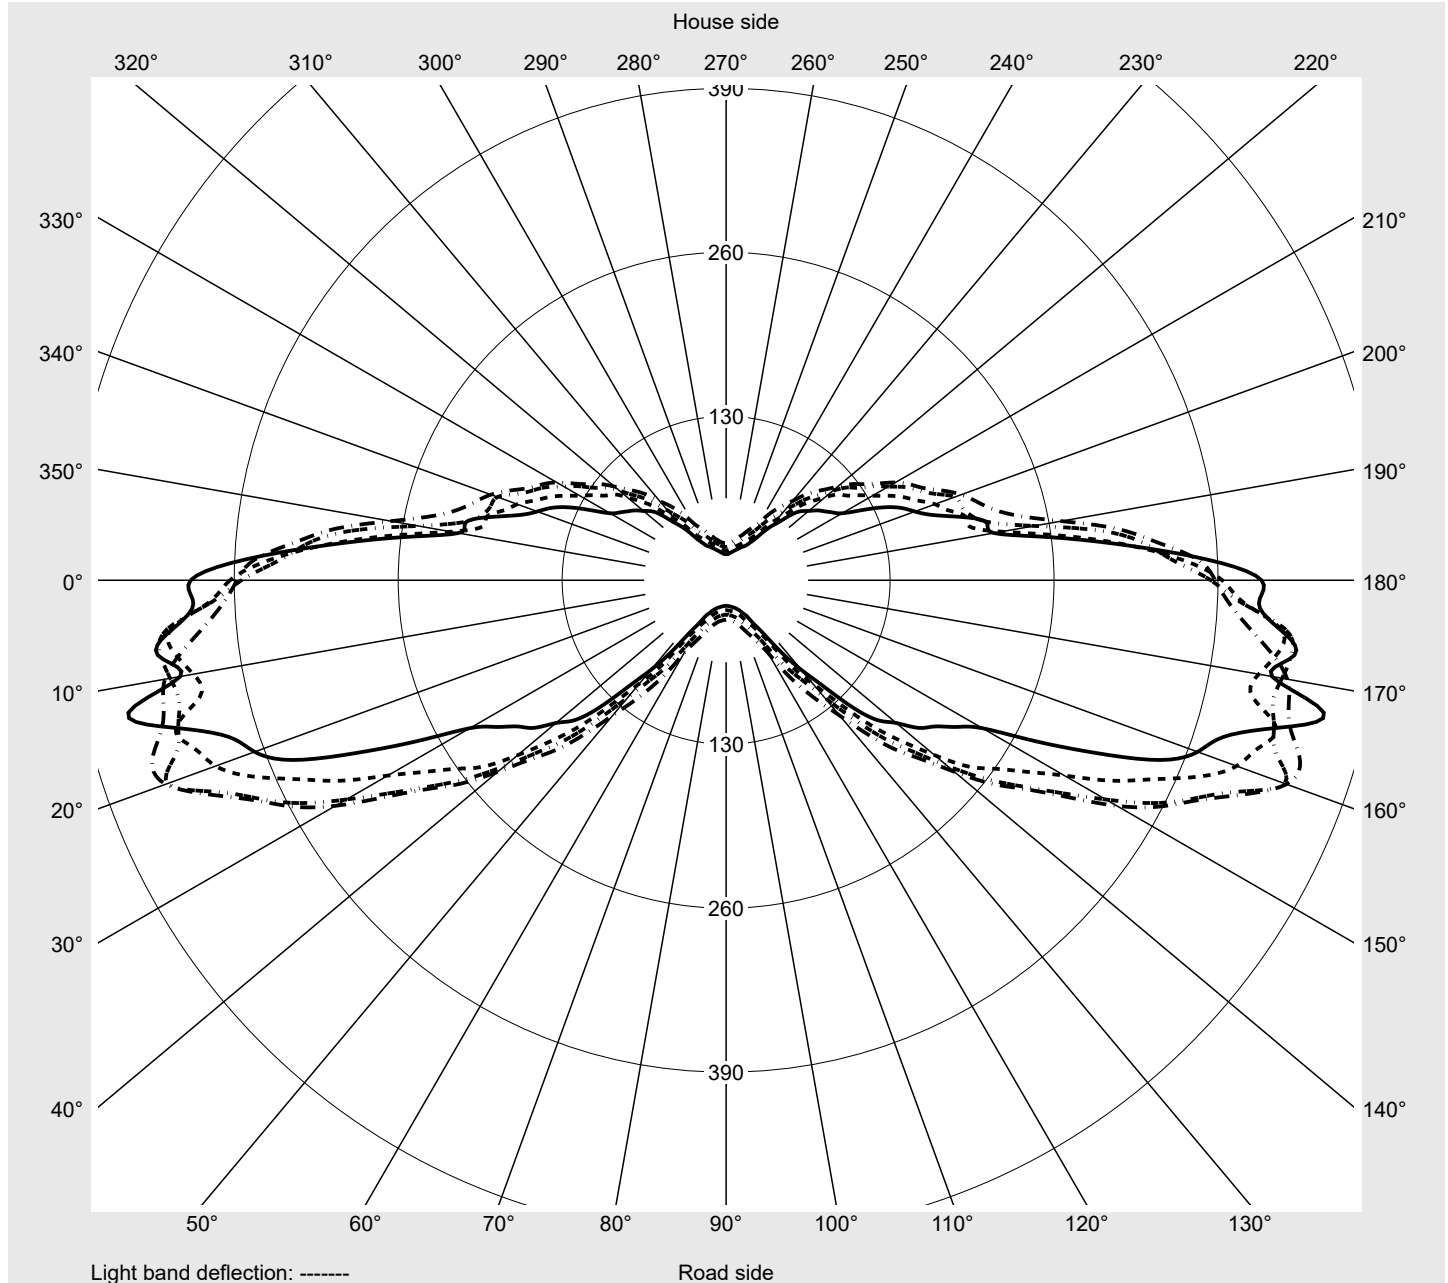

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_332
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	352.2	353.7	353.6	354.5	355.2	356.3	357.3	358.1	359.3	360.3	361.4	361.6	362.5	363.1	364.4
5,0°	348.9	350.4	352.9	355.0	355.9	357.8	358.9	360.2	361.9	363.3	364.6	366.3	367.5	369.4	370.9
7,5°	343.7	345.7	348.5	350.3	352.6	355.0	357.4	360.2	362.6	363.9	366.3	368.4	369.8	370.1	371.3
10,0°	344.0	346.0	348.4	351.2	353.8	357.7	359.5	362.4	366.1	368.0	369.9	370.9	372.9	372.9	374.6
12,5°	343.3	346.8	349.2	351.8	354.6	357.5	360.8	363.4	366.6	369.3	370.9	372.6	373.6	374.9	375.5
15,0°	344.5	349.3	352.8	355.6	357.2	360.4	364.0	366.7	369.8	371.0	372.8	374.2	375.1	377.1	377.5
17,5°	344.9	349.8	353.7	357.2	360.0	363.0	367.8	372.1	372.9	373.1	373.7	374.7	374.8	374.6	375.4
20,0°	347.8	353.8	356.7	361.3	364.1	366.6	368.6	370.3	372.5	374.8	376.2	377.0	377.2	375.3	374.4
22,5°	349.9	355.1	357.8	360.3	363.5	365.5	367.2	368.9	370.7	372.3	372.7	374.2	374.0	373.2	372.8
25,0°	349.7	354.9	358.2	361.9	364.4	368.1	370.5	372.3	371.0	369.6	371.2	369.1	369.0	368.2	364.2
27,5°	350.1	356.6	359.2	364.0	366.5	367.4	368.7	367.1	369.5	369.0	367.9	365.9	364.3	364.7	362.3
30,0°	352.4	358.7	362.9	368.0	369.2	368.0	368.0	367.1	366.8	366.9	366.5	364.0	360.0	358.1	354.2
32,5°	356.1	363.9	366.7	365.9	366.6	369.7	370.6	370.3	368.4	365.5	363.8	361.5	356.7	351.8	347.3
35,0°	366.3	369.7	370.2	371.2	370.3	370.6	370.4	369.0	367.4	364.5	361.6	356.9	351.8	346.3	339.8
37,5°	363.0	370.4	372.4	372.1	372.2	370.7	371.2	370.3	369.3	367.2	359.3	352.7	346.2	341.9	334.5
40,0°	366.1	370.8	371.4	372.0	373.5	373.7	372.7	372.2	366.9	358.9	355.6	352.2	345.4	337.8	323.0
42,5°	365.3	370.9	371.2	371.4	374.9	374.8	370.2	369.5	365.0	357.0	352.6	345.3	335.1	325.5	320.0
45,0°	370.5	375.7	377.4	376.4	376.0	374.4	378.5	375.5	369.3	361.5	353.6	346.2	334.0	323.8	308.8
47,5°	369.8	376.4	376.9	377.8	379.8	380.1	385.5	382.1	375.5	365.9	357.9	346.3	335.0	323.9	310.9
50,0°	368.7	377.2	379.8	381.5	384.6	387.1	388.7	385.1	380.7	376.6	365.6	350.8	335.7	320.6	305.8
52,5°	369.7	379.2	380.8	383.8	396.2	402.7	408.2	401.0	390.7	381.3	371.0	358.2	342.2	325.4	303.1
55,0°	372.7	379.3	379.9	383.0	391.9	404.8	414.1	410.6	401.4	391.3	378.4	363.2	342.3	324.3	307.1
57,5°	389.0	394.5	400.4	405.9	413.2	420.5	424.9	420.7	412.3	397.1	380.9	362.5	342.8	318.0	297.5
60,0°	404.9	409.9	418.7	427.9	442.5	443.6	450.2	449.1	442.2	417.0	389.7	369.9	351.1	320.8	295.0
62,5°	387.8	398.6	415.0	435.3	451.8	456.9	463.9	477.2	472.8	443.8	412.7	388.5	357.7	319.5	288.5
65,0°	384.3	409.1	445.0	452.4	447.6	444.2	449.7	457.3	471.2	438.3	409.5	382.6	347.6	313.6	284.5
67,5°	393.4	410.9	441.4	441.4	428.9	427.4	451.8	442.5	430.7	406.6	373.4	344.2	309.7	282.7	260.5
70,0°	424.6	422.8	440.1	454.6	439.5	485.5	452.2	413.3	397.8	372.4	324.4	276.3	234.6	216.5	202.1
72,5°	438.0	416.1	439.2	466.1	444.6	440.9	388.1	346.1	334.3	303.8	246.4	195.7	160.9	145.0	131.4
75,0°	351.5	331.1	329.2	378.1	328.1	302.9	247.8	217.5	209.5	200.0	168.0	137.7	121.1	112.0	99.9
77,5°	153.4	188.1	189.7	181.6	140.2	118.0	101.0	95.5	96.2	100.9	98.8	90.3	82.9	75.7	63.8
80,0°	50.5	67.9	57.9	44.5	39.4	39.1	46.9	49.3	47.0	42.7	45.1	43.7	39.7	35.6	30.4
82,5°	10.3	10.3	10.1	10.2	10.7	12.0	13.9	12.3	12.7	11.7	12.6	11.6	11.2	11.0	10.8
85,0°	6.2	6.2	6.2	6.1	6.1	6.1	6.0	5.9	5.8	5.6	5.5	5.3	5.1	5.0	4.9
87,5°	3.2	3.2	3.2	3.2	3.2	3.1	3.0	3.0	3.0	2.9	2.8	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_332
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	364.3	365.1	365.8	365.8	365.5	365.4	366.1	366.1	366.9	368.0	368.3	368.8	369.0	369.2	369.1
5,0°	372.6	372.7	374.4	374.5	376.2	377.2	378.2	378.1	378.2	377.9	379.2	379.2	379.0	378.7	378.3
7,5°	372.2	373.0	375.2	377.0	379.0	380.7	382.6	383.5	384.6	384.6	384.8	384.6	385.8	386.3	387.3
10,0°	375.5	375.9	375.9	377.8	378.9	380.5	381.6	383.0	382.4	383.8	384.3	384.5	384.9	385.6	386.2
12,5°	376.3	377.0	377.5	378.9	380.2	383.0	383.5	384.6	383.7	383.7	382.4	382.0	382.8	382.0	381.6
15,0°	377.8	377.5	376.8	376.1	375.8	377.1	377.5	378.5	378.1	377.5	377.4	378.2	377.5	378.9	379.9
17,5°	376.5	376.2	375.8	373.6	371.2	371.4	369.7	369.9	370.4	372.0	370.3	371.5	370.6	371.4	370.4
20,0°	372.8	373.3	373.2	375.5	372.9	370.5	366.2	364.2	361.9	362.7	362.3	362.4	361.6	361.9	360.7
22,5°	372.3	370.2	369.6	367.3	364.1	363.0	360.6	357.1	354.0	352.5	351.2	349.9	350.1	348.1	348.8
25,0°	363.0	361.2	360.4	357.9	354.5	352.2	350.1	348.9	347.5	343.9	341.3	338.8	335.5	333.8	333.2
27,5°	357.7	355.3	351.5	348.4	345.9	342.4	336.3	333.8	332.0	326.7	321.9	318.9	316.8	315.0	313.2
30,0°	350.3	348.1	344.4	337.4	330.6	325.4	322.2	317.4	312.2	307.9	304.0	298.6	295.7	295.2	293.9
32,5°	340.8	333.6	328.9	324.2	318.9	313.0	306.2	299.8	293.8	288.9	283.5	278.1	274.6	271.9	269.4
35,0°	332.1	324.0	315.4	309.9	303.3	295.1	286.0	277.2	269.4	264.4	257.7	252.1	247.9	244.9	242.0
37,5°	324.2	315.3	305.4	297.9	291.8	281.4	271.5	261.3	251.3	242.2	233.2	226.3	222.7	218.0	213.1
40,0°	316.6	306.5	294.1	284.1	274.2	262.4	252.0	239.8	228.9	221.6	213.1	204.3	196.7	189.8	184.7
42,5°	306.4	294.5	283.0	272.1	257.6	243.2	234.5	224.1	212.6	201.6	190.8	181.0	173.2	165.3	159.1
45,0°	295.9	284.8	269.4	256.0	243.0	231.9	219.1	206.3	193.7	181.5	170.7	159.0	151.5	143.1	136.0
47,5°	292.7	276.4	257.1	243.5	228.8	215.6	201.4	188.6	175.0	162.8	151.2	140.4	132.1	124.7	116.8
50,0°	290.2	270.1	249.2	231.2	214.9	197.9	184.8	169.6	156.5	144.6	132.8	122.8	112.7	104.7	97.9
52,5°	282.5	259.8	242.3	217.1	198.4	181.2	166.2	150.7	136.9	126.8	117.7	107.1	98.5	90.0	82.4
55,0°	284.1	257.7	230.1	204.4	183.1	165.1	148.2	131.4	120.2	110.1	101.5	92.5	83.4	75.2	68.4
57,5°	277.1	250.3	225.4	199.2	177.5	160.1	137.7	120.6	107.5	97.0	86.4	77.2	68.9	61.8	56.1
60,0°	271.7	246.7	221.1	197.6	176.9	154.8	129.8	111.7	98.2	86.1	73.0	63.5	56.4	50.5	45.9
62,5°	264.8	236.3	210.0	189.8	165.1	140.0	121.2	103.6	85.7	66.5	57.0	50.5	45.7	41.8	38.5
65,0°	258.3	229.0	201.3	177.5	148.6	121.2	100.8	85.9	67.9	54.3	46.6	41.2	37.5	34.7	32.5
67,5°	242.8	215.7	189.1	163.0	132.3	107.0	87.8	61.6	49.0	42.0	37.3	33.9	30.8	28.8	27.2
70,0°	192.3	176.1	164.8	143.8	113.6	92.8	72.3	51.5	41.4	33.1	29.9	27.2	25.3	24.1	22.9
72,5°	127.9	125.3	123.6	114.2	91.3	79.6	52.4	40.4	31.9	26.1	22.7	21.1	20.2	19.7	19.1
75,0°	87.2	80.4	76.9	69.8	57.4	47.0	31.0	30.1	23.1	19.3	17.9	16.9	16.3	15.8	15.4
77,5°	54.1	49.4	43.0	40.4	36.5	27.1	21.8	20.2	15.8	14.9	14.1	13.5	12.9	12.5	12.1
80,0°	24.5	23.0	21.7	18.0	15.5	14.7	15.1	13.9	11.9	11.2	10.8	10.3	9.8	9.5	9.1
82,5°	9.8	9.6	9.4	8.9	8.8	8.7	8.5	8.3	8.1	7.9	7.6	7.3	7.0	6.7	6.3
85,0°	4.8	4.7	4.7	4.7	4.6	4.6	4.6	4.5	4.4	4.3	4.1	4.0	3.9	3.8	3.7
87,5°	2.5	2.4	2.5	2.3	2.3	2.2	2.1	2.0	1.8	1.7	1.6	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_332
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	368.8	368.7	369.1	369.4	369.9	370.0	369.5	351.3	350.3	350.3	349.4	348.5	347.5	346.6	346.0
5,0°	378.8	379.3	379.3	379.3	378.4	378.0	378.1	347.8	346.4	344.3	342.5	340.9	339.7	338.0	337.1
7,5°	387.1	386.5	387.3	388.3	387.3	386.1	385.9	341.0	337.9	336.2	335.0	333.2	331.2	329.2	327.2
10,0°	387.1	386.1	385.0	384.4	384.3	383.4	382.0	340.4	336.6	333.8	330.4	326.8	323.5	320.9	317.2
12,5°	382.3	383.3	385.7	385.9	386.0	385.9	386.2	338.4	334.9	330.1	323.8	320.3	316.9	311.9	307.5
15,0°	379.6	381.1	382.3	380.7	381.0	379.0	378.1	339.0	334.9	330.7	325.8	319.6	313.6	306.7	299.9
17,5°	370.8	371.7	371.6	372.2	371.2	371.0	369.4	339.2	334.1	326.5	320.3	314.2	308.5	301.1	293.7
20,0°	362.1	361.2	362.0	362.1	361.6	363.0	362.2	342.6	333.4	325.7	317.0	308.6	300.4	293.7	287.0
22,5°	348.3	346.7	346.6	348.8	350.0	349.8	349.7	341.9	332.8	324.4	315.2	304.7	297.7	289.0	281.5
25,0°	332.5	332.7	331.7	332.2	332.5	332.5	333.0	340.7	330.3	320.9	312.0	303.8	295.0	286.4	277.2
27,5°	313.4	313.7	313.3	311.0	311.4	311.8	312.4	343.0	332.1	320.5	310.1	299.3	290.6	281.4	270.5
30,0°	292.3	290.8	288.8	289.1	290.7	290.7	290.7	345.1	332.4	320.1	308.0	297.0	286.5	275.6	264.2
32,5°	266.0	263.9	263.7	262.4	261.8	263.5	266.5	346.7	335.8	321.5	307.7	297.5	285.3	271.5	260.2
35,0°	236.8	234.5	232.7	231.8	232.9	233.9	232.9	352.6	337.5	322.6	310.4	297.7	284.4	269.6	255.5
37,5°	210.5	206.6	204.1	201.1	199.8	200.2	200.5	353.4	339.3	321.8	307.8	293.5	278.3	264.9	252.9
40,0°	180.8	176.8	173.0	170.0	167.6	167.6	165.7	353.9	336.6	318.3	304.3	291.3	274.1	261.5	248.9
42,5°	154.3	149.4	145.4	142.2	138.7	138.0	137.4	351.4	332.1	314.3	298.0	283.3	267.4	253.6	239.0
45,0°	130.4	124.4	119.4	114.8	112.8	111.2	110.9	358.8	333.8	314.6	297.7	276.2	260.8	245.8	226.6
47,5°	108.9	103.2	98.0	93.3	90.5	89.0	88.2	354.8	328.1	304.8	286.0	265.2	251.3	232.6	213.6
50,0°	91.3	85.4	79.8	75.5	72.5	71.3	71.0	355.3	327.6	301.5	277.4	256.4	241.7	220.0	206.9
52,5°	76.0	69.9	65.1	61.4	59.6	58.3	57.8	352.2	319.8	294.3	273.3	256.0	235.6	215.5	199.2
55,0°	62.3	57.1	53.6	51.0	49.8	49.1	48.8	350.0	316.1	287.7	264.0	248.3	226.6	210.6	195.0
57,5°	51.0	47.5	44.7	43.3	42.5	41.9	41.4	370.5	329.9	295.5	264.5	247.3	223.1	206.7	190.1
60,0°	42.7	40.4	38.7	37.6	36.9	36.4	36.5	381.4	344.4	311.0	276.6	247.2	225.8	205.8	195.6
62,5°	36.1	34.6	33.2	32.5	31.9	31.4	31.6	374.3	343.4	312.7	269.9	236.7	218.5	207.9	198.4
65,0°	30.9	29.6	28.8	28.2	27.9	27.4	27.5	355.3	333.3	300.3	248.0	213.1	200.3	195.7	192.9
67,5°	26.2	25.4	25.0	24.4	24.2	23.9	23.8	363.0	319.9	269.7	221.7	197.5	196.1	184.5	176.2
70,0°	22.4	21.7	21.3	20.9	20.5	20.4	20.3	380.9	318.5	260.7	215.5	211.5	193.7	171.9	159.3
72,5°	18.6	18.0	17.7	17.5	17.2	17.0	16.9	359.8	306.3	278.3	225.9	188.4	160.9	138.0	134.1
75,0°	15.1	14.8	14.5	14.1	13.8	13.7	13.7	291.4	253.8	231.4	177.1	131.4	102.2	90.4	87.8
77,5°	11.8	11.5	11.1	10.8	10.4	10.3	10.1	154.9	151.7	125.3	80.6	54.6	46.7	44.8	46.0
80,0°	8.6	8.2	7.9	7.6	7.4	7.2	7.1	63.3	48.9	34.1	30.1	25.4	24.1	25.7	25.4
82,5°	5.9	5.5	5.3	5.0	4.9	4.6	4.6	10.2	9.5	9.1	9.0	9.1	9.9	9.4	9.9
85,0°	3.4	3.1	3.0	2.7	2.6	2.3	2.4	5.9	5.9	5.7	5.6	5.4	5.2	5.1	4.9
87,5°	1.2	1.2	1.1	1.0	0.9	0.8	0.8	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_332
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	346.1	345.7	345.4	345.2	344.6	343.7	343.2	342.5	342.0	341.0	340.2	340.0	339.5	340.1	339.5
5,0°	335.1	333.9	333.3	332.1	330.7	329.5	328.7	327.5	327.4	326.1	324.3	322.8	321.4	320.6	319.9
7,5°	325.3	323.6	322.3	320.1	318.0	316.5	313.7	312.2	310.0	308.4	305.8	304.2	301.9	300.4	298.8
10,0°	313.9	310.8	307.2	303.7	300.9	298.3	295.6	292.7	290.5	288.2	286.1	284.0	281.6	279.4	278.2
12,5°	303.3	298.4	294.7	290.5	286.5	282.3	279.4	275.5	271.6	269.4	267.6	264.3	262.7	260.4	258.3
15,0°	295.6	289.6	283.6	278.6	272.0	266.5	262.1	258.0	255.1	251.3	247.9	245.2	242.6	240.9	238.5
17,5°	286.3	279.3	272.1	265.8	260.0	255.0	249.7	245.4	241.2	236.3	232.2	228.4	225.7	223.6	221.9
20,0°	278.8	270.4	263.1	257.0	252.2	246.7	239.7	233.7	228.3	224.2	219.5	215.1	210.8	207.7	206.0
22,5°	273.0	264.8	257.0	248.2	241.6	235.3	229.8	223.5	217.2	211.7	206.3	202.3	199.6	197.1	194.6
25,0°	267.2	257.4	249.4	241.3	234.0	226.8	219.9	212.9	206.3	200.8	197.0	192.7	189.0	186.1	183.1
27,5°	260.3	250.8	242.0	234.0	225.3	217.4	209.9	202.6	195.8	189.9	186.3	182.6	178.8	175.1	172.0
30,0°	253.7	244.5	234.6	226.2	217.8	207.6	199.7	193.5	187.6	181.6	177.4	173.7	169.5	165.9	162.9
32,5°	249.7	238.2	227.6	216.7	207.5	198.6	191.3	185.5	178.3	171.9	167.9	163.8	160.1	157.1	153.6
35,0°	243.9	232.0	220.1	209.0	199.1	191.5	184.0	176.8	171.0	164.9	159.9	156.0	152.3	148.0	144.2
37,5°	240.2	226.7	212.8	202.0	192.8	184.3	176.3	169.2	163.1	158.4	153.7	149.6	144.2	139.8	136.0
40,0°	232.1	217.0	206.7	196.6	185.6	176.3	168.9	163.4	157.6	151.8	147.4	142.2	136.4	132.0	127.8
42,5°	222.2	209.0	198.8	185.9	176.3	169.4	162.5	156.5	151.0	146.0	140.7	136.2	130.3	125.6	119.9
45,0°	213.6	201.7	187.6	176.7	169.9	163.2	157.5	151.8	146.1	140.4	135.4	129.4	124.3	118.0	112.2
47,5°	201.6	190.4	178.7	172.2	167.0	160.3	153.4	147.2	141.4	135.2	128.5	123.1	118.1	110.7	105.1
50,0°	193.9	181.1	174.1	167.2	161.5	155.9	149.4	143.4	136.3	129.1	121.9	115.9	108.8	102.6	96.3
52,5°	184.7	177.4	172.1	166.1	159.0	152.1	144.9	137.7	130.8	123.2	115.1	108.6	102.0	94.8	88.1
55,0°	184.9	176.0	169.0	162.2	154.2	148.9	141.4	133.0	124.4	115.2	107.4	99.9	92.7	85.9	80.7
57,5°	179.5	171.9	163.4	155.2	148.9	142.6	135.7	127.1	118.9	110.0	102.6	96.0	87.7	79.7	73.6
60,0°	183.1	170.1	162.7	155.5	145.7	138.2	131.4	121.8	114.0	106.1	99.0	91.1	81.9	74.2	67.6
62,5°	185.8	172.9	164.5	155.1	142.7	132.8	125.2	115.5	106.6	99.3	91.2	82.1	75.1	68.3	60.9
65,0°	179.0	168.8	160.0	148.5	138.8	127.8	120.8	110.3	100.1	91.9	81.9	72.3	64.5	58.6	51.3
67,5°	165.0	155.7	145.1	134.0	125.5	117.0	111.8	102.3	93.0	84.1	72.6	63.4	56.0	46.4	41.4
70,0°	149.9	136.6	120.0	106.2	100.0	95.3	91.0	85.5	81.1	74.0	63.3	56.0	47.9	39.9	35.4
72,5°	123.9	106.0	89.8	78.8	72.2	68.3	66.8	65.5	64.5	61.1	53.0	48.1	38.0	33.0	29.5
75,0°	85.5	76.0	66.6	60.9	58.4	54.4	49.8	47.5	45.7	43.6	38.5	34.2	28.2	27.0	24.0
77,5°	48.5	48.7	46.5	44.6	42.3	38.5	35.1	33.6	31.5	30.7	28.8	25.0	22.5	21.2	19.0
80,0°	24.7	26.2	26.3	25.4	24.5	23.0	21.0	20.5	20.3	19.4	18.3	17.7	17.3	16.3	15.2
82,5°	9.8	10.4	10.4	10.8	11.2	11.4	11.3	11.2	11.2	11.3	11.6	11.6	11.4	11.2	11.0
85,0°	4.8	4.7	4.6	4.4	4.3	4.2	4.2	4.2	4.3	4.3	4.6	4.9	5.2	5.5	5.6
87,5°	2.7	2.5	2.5	2.4	2.4	2.3	2.2	2.1	2.1	2.0	1.9	1.8	1.7	1.6	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_332
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	0.5	0.5
2,5°	339.0	338.7	337.7	336.6	335.7	335.7	335.5	335.9	335.5	335.7	335.2	334.7	334.9	4.2	4.7
5,0°	319.4	318.2	317.0	316.1	315.5	314.7	314.4	314.2	314.0	314.1	314.4	313.3	313.3	8.3	13.1
7,5°	297.5	295.2	294.7	292.5	291.5	290.7	290.0	289.3	288.6	288.9	288.4	288.1	288.6	12.2	25.3
10,0°	276.3	274.4	273.1	271.4	270.5	270.1	269.7	268.8	267.8	268.3	267.4	267.0	266.6	15.9	41.2
12,5°	255.4	253.4	252.0	251.1	249.7	248.5	247.3	246.8	246.3	246.3	246.7	246.8	247.4	19.4	60.6
15,0°	237.2	235.8	233.2	231.1	229.6	228.1	228.3	228.1	226.4	225.6	223.7	222.7	223.2	22.6	83.2
17,5°	219.4	217.0	215.1	213.2	211.5	211.6	211.1	211.3	210.6	210.2	209.3	208.7	208.6	25.6	108.9
20,0°	204.5	202.3	200.4	199.1	198.1	197.5	196.9	196.7	195.9	195.2	194.9	194.9	195.4	28.5	137.4
22,5°	191.9	189.4	186.8	185.5	185.2	184.8	183.7	182.5	182.5	182.6	181.7	180.8	180.9	31.1	168.5
25,0°	179.8	178.0	177.1	175.9	173.6	172.3	171.8	172.0	171.4	170.6	170.5	170.8	171.0	33.4	201.9
27,5°	170.3	168.3	165.8	163.0	161.9	160.9	160.5	160.0	159.4	158.8	159.2	159.0	158.2	35.3	237.3
30,0°	160.1	157.8	155.3	153.8	152.1	150.9	150.3	149.6	148.8	148.2	147.9	148.0	148.2	37.0	274.3
32,5°	150.3	147.9	145.7	143.7	141.6	139.8	138.9	138.3	137.0	136.7	136.2	135.8	135.9	38.3	312.6
35,0°	140.5	137.3	134.8	133.0	130.4	127.8	126.4	125.5	124.6	123.3	122.9	122.3	122.1	39.3	351.9
37,5°	131.2	127.4	124.3	121.1	118.7	116.0	114.7	112.7	111.4	110.7	110.3	109.6	109.2	39.9	391.8
40,0°	122.0	118.4	114.9	110.6	107.7	104.9	102.0	100.4	99.0	98.1	96.6	96.0	95.9	40.3	432.1
42,5°	113.8	109.5	105.1	101.1	98.0	93.9	91.7	89.0	87.4	86.0	84.1	83.6	83.5	40.3	472.3
45,0°	106.5	101.6	96.4	92.1	87.8	84.4	81.2	78.1	75.8	74.0	72.9	72.1	71.6	40.4	512.8
47,5°	98.9	93.4	87.9	83.7	79.1	75.1	71.8	68.9	66.1	64.3	63.0	62.4	62.1	40.4	553.2
50,0°	90.5	84.8	79.7	75.5	70.9	67.0	63.7	59.8	57.4	55.9	54.3	53.6	53.3	40.4	593.5
52,5°	82.4	77.7	72.5	68.1	63.7	59.6	56.0	52.4	50.6	48.7	47.3	47.1	46.4	40.5	634.1
55,0°	75.2	71.1	66.0	60.6	56.2	52.7	49.5	46.4	44.4	43.0	42.0	41.5	41.3	40.5	674.6
57,5°	68.3	63.5	58.2	53.5	49.7	46.3	43.8	41.5	39.6	38.3	37.7	37.2	37.0	41.1	715.7
60,0°	61.9	55.6	50.8	46.8	43.8	41.0	38.9	37.0	35.4	34.3	33.7	33.3	33.2	42.3	758.0
62,5°	52.7	47.9	44.6	41.6	38.4	36.4	34.3	32.8	31.5	30.5	29.9	29.4	29.3	42.6	800.5
65,0°	45.4	41.7	39.1	36.4	34.0	32.4	30.6	29.3	28.3	27.4	26.9	26.6	26.4	41.7	842.2
67,5°	38.1	35.8	33.7	31.6	29.8	28.7	27.4	26.2	25.2	24.5	23.9	23.4	23.3	39.6	881.8
70,0°	32.0	30.3	29.0	27.6	26.3	25.1	24.2	23.2	22.4	21.6	21.0	20.7	20.7	37.3	919.1
72,5°	27.1	25.2	24.2	23.4	22.5	21.7	20.8	20.0	19.2	18.3	18.0	17.5	17.6	32.6	951.7
75,0°	22.0	20.9	19.9	19.4	18.7	18.1	17.3	16.7	15.9	15.3	14.8	14.5	14.2	24.1	975.8
77,5°	18.0	17.3	16.5	15.7	15.1	14.4	14.1	13.4	12.8	12.2	11.5	11.3	11.2	13.5	989.3
80,0°	14.5	13.7	13.1	12.4	11.8	11.2	10.6	10.0	9.3	8.7	8.4	8.0	7.9	6.3	995.6
82,5°	10.7	10.3	9.9	9.4	8.8	8.2	7.4	6.8	6.2	5.8	5.5	5.2	5.2	2.5	998.2
85,0°	5.7	5.7	5.6	5.5	5.3	4.8	4.4	3.9	3.5	3.1	2.8	2.1	2.5	1.3	999.4
87,5°	1.4	1.3	1.3	1.3	1.3	1.4	1.3	1.2	1.1	0.9	0.6	0.5	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_332
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	7510	60.5	63.8	62.2
95	241	252	7126	56.8	59.9	58.4
90	229	250	6771	53.5	56.3	54.9
85	216	248	6386	50.1	52.7	51.4
80	203	246	6002	46.7	49.1	47.9
75	190	243	5618	43.4	45.6	44.5
70	178	241	5263	40.3	42.4	41.3
65	165	238	4879	37.2	39.1	38.2
60	152	235	4494	34.2	35.8	35.0
55	140	232	4139	31.4	32.9	32.2
50	127	229	3755	28.4	29.8	29.1
45	114	225	3371	25.6	26.8	26.2
40	102	221	3016	23.0	24.0	23.5
35	89	216	2631	20.2	21.1	20.6
30	76	210	2247	17.5	18.2	17.8
25	63	203	1863	15.0	15.5	15.2
20	51	195	1508	12.6	13.1	12.8
15	38	184	1124	10.1	10.4	10.2
10	25	169	739	7.7	8.0	7.8
8	21	163	621	6.7	7.0	6.8