

Photometric test report

Family Streetlight 11 mini LED

Order number: 5XC2HC1F08HE
EAN: 4069025225443

LP number
59339_334

serial
documentation
24.06.2024



Version	post-top or side-entry mounting, Colour Switch
Optic	asymmetric, extremely wide distribution with an additional rear light component (ST0.5ST0.5)
Cover	transparent, PMMA
Lamps	LED 4000 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Setting	individual position
Rated values	Net luminous flux = 8770 lm Power consumption = 62.9 W Luminous efficacy = 139.4 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C192.5-12.5

C195-15

C270-90

Imax: 485 cd/klm

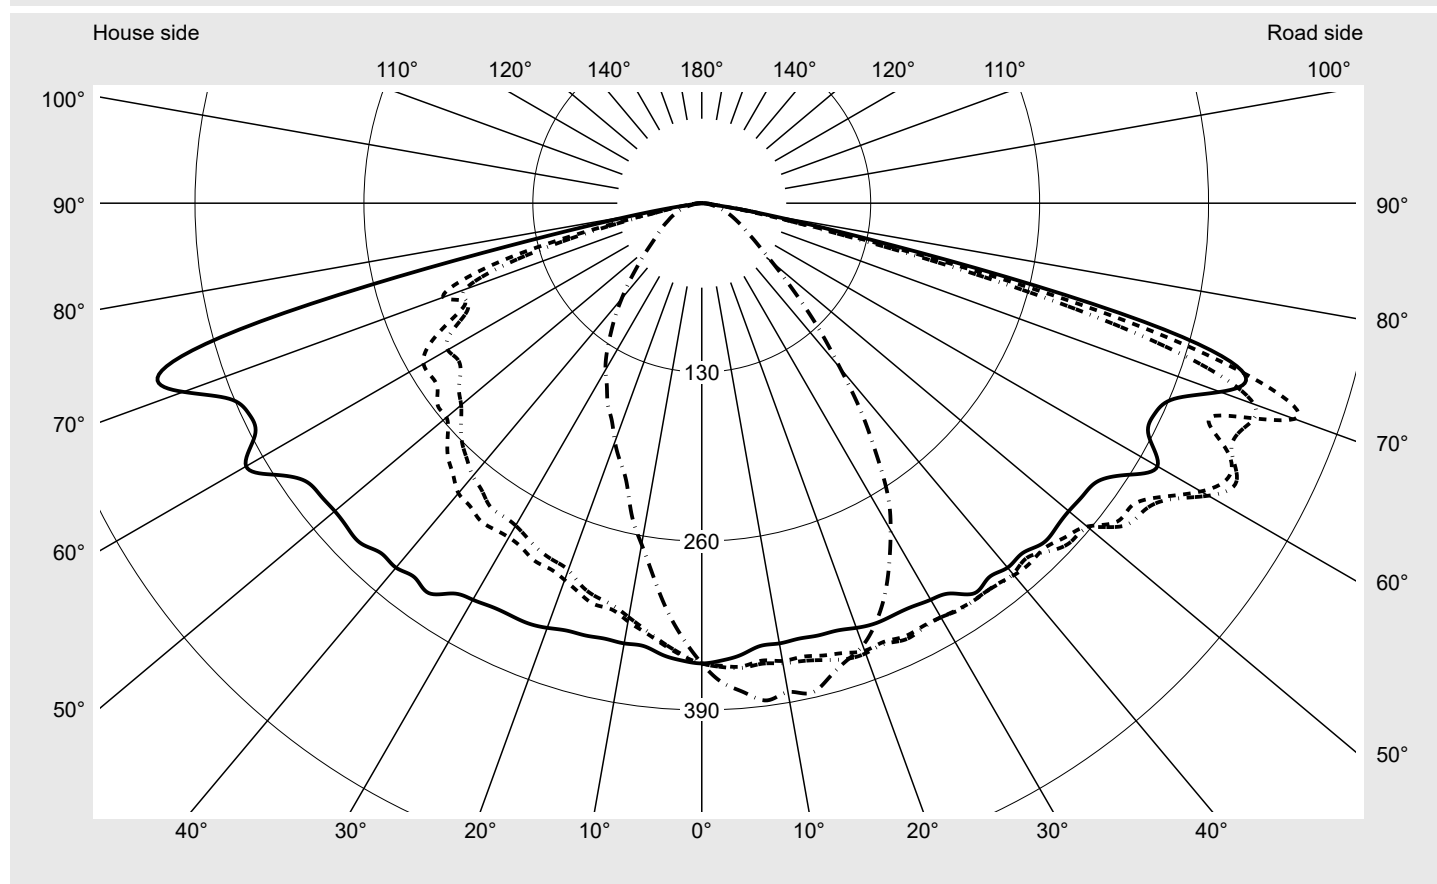

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	485.5
Imax 80°	67.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family
Streetlight 11 mini LED

Order number: **5XC2HC1F08HE**
EAN: **4069025225443**

LP number
59339_334

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

siteco

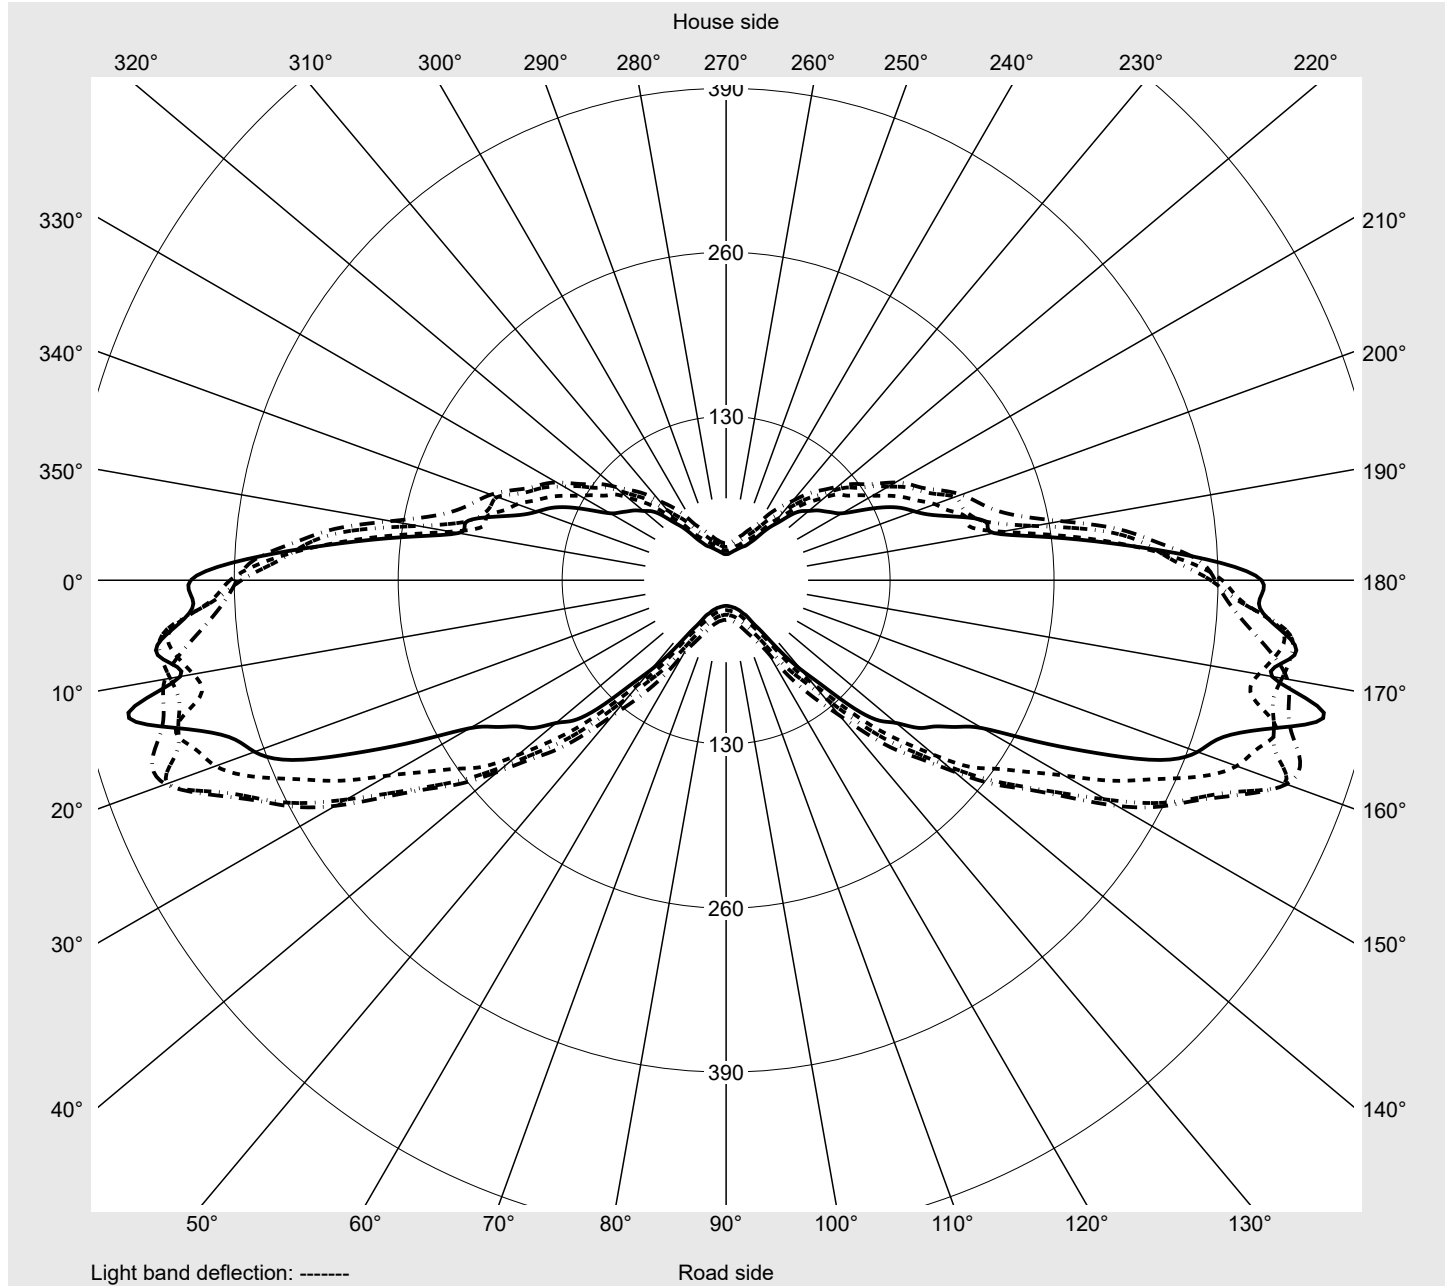

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_334
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	352.2	353.7	353.6	354.5	355.2	356.3	357.3	358.1	359.3	360.3	361.4	361.6	362.5	363.1	364.4
5,0°	348.9	350.4	352.9	355.0	355.9	357.8	358.9	360.2	361.9	363.3	364.6	366.3	367.5	369.4	370.9
7,5°	343.7	345.7	348.5	350.3	352.6	355.0	357.4	360.2	362.6	363.9	366.3	368.4	369.8	370.1	371.3
10,0°	344.0	346.0	348.4	351.2	353.8	357.7	359.5	362.4	366.1	368.0	369.9	370.9	372.9	372.9	374.6
12,5°	343.3	346.8	349.2	351.8	354.6	357.5	360.8	363.4	366.6	369.3	370.9	372.6	373.6	374.9	375.5
15,0°	344.5	349.3	352.8	355.6	357.2	360.4	364.0	366.7	369.8	371.0	372.8	374.2	375.1	377.1	377.5
17,5°	344.9	349.8	353.7	357.2	360.0	363.0	367.8	372.1	372.9	373.1	373.7	374.7	374.8	374.6	375.4
20,0°	347.8	353.8	356.7	361.3	364.1	366.6	368.6	370.3	372.5	374.8	376.2	377.0	377.2	375.3	374.4
22,5°	349.9	355.1	357.8	360.3	363.5	365.5	367.2	368.9	370.7	372.3	372.7	374.2	374.0	373.2	372.8
25,0°	349.7	354.9	358.2	361.9	364.4	368.1	370.5	372.3	371.0	369.6	371.2	369.1	369.0	368.2	364.2
27,5°	350.1	356.6	359.2	364.0	366.5	367.4	368.7	367.1	369.5	369.0	367.9	365.9	364.3	364.7	362.3
30,0°	352.4	358.7	362.9	368.0	369.2	368.0	368.0	367.1	366.8	366.9	366.5	364.0	360.0	358.1	354.2
32,5°	356.1	363.9	366.7	365.9	366.6	369.7	370.6	370.3	368.4	365.5	363.8	361.5	356.7	351.8	347.3
35,0°	366.3	369.7	370.2	371.2	370.3	370.6	370.4	369.0	367.4	364.5	361.6	356.9	351.8	346.3	339.8
37,5°	363.0	370.4	372.4	372.1	372.2	370.7	371.2	370.3	369.3	367.2	359.3	352.7	346.2	341.9	334.5
40,0°	366.1	370.8	371.4	372.0	373.5	373.7	372.7	372.2	366.9	358.9	355.6	352.2	345.4	337.8	323.0
42,5°	365.3	370.9	371.2	371.4	374.9	374.8	370.2	369.5	365.0	357.0	352.6	345.3	335.1	325.5	320.0
45,0°	370.5	375.7	377.4	376.4	376.0	374.4	378.5	375.5	369.3	361.5	353.6	346.2	334.0	323.8	308.8
47,5°	369.8	376.4	376.9	377.8	379.8	380.1	385.5	382.1	375.5	365.9	357.9	346.3	335.0	323.9	310.9
50,0°	368.7	377.2	379.8	381.5	384.6	387.1	388.7	385.1	380.7	376.6	365.6	350.8	335.7	320.6	305.8
52,5°	369.7	379.2	380.8	383.8	396.2	402.7	408.2	401.0	390.7	381.3	371.0	358.2	342.2	325.4	303.1
55,0°	372.7	379.3	379.9	383.0	391.9	404.8	414.1	410.6	401.4	391.3	378.4	363.2	342.3	324.3	307.1
57,5°	389.0	394.5	400.4	405.9	413.2	420.5	424.9	420.7	412.3	397.1	380.9	362.5	342.8	318.0	297.5
60,0°	404.9	409.9	418.7	427.9	442.5	443.6	450.2	449.1	442.2	417.0	389.7	369.9	351.1	320.8	295.0
62,5°	387.8	398.6	415.0	435.3	451.8	456.9	463.9	477.2	472.8	443.8	412.7	388.5	357.7	319.5	288.5
65,0°	384.3	409.1	445.0	452.4	447.6	444.2	449.7	457.3	471.2	438.3	409.5	382.6	347.6	313.6	284.5
67,5°	393.4	410.9	441.4	441.4	428.9	427.4	451.8	442.5	430.7	406.6	373.4	344.2	309.7	282.7	260.5
70,0°	424.6	422.8	440.1	454.6	439.5	485.5	452.2	413.3	397.8	372.4	324.4	276.3	234.6	216.5	202.1
72,5°	438.0	416.1	439.2	466.1	444.6	440.9	388.1	346.1	334.3	303.8	246.4	195.7	160.9	145.0	131.4
75,0°	351.5	331.1	329.2	378.1	328.1	302.9	247.8	217.5	209.5	200.0	168.0	137.7	121.1	112.0	99.9
77,5°	153.4	188.1	189.7	181.6	140.2	118.0	101.0	95.5	96.2	100.9	98.8	90.3	82.9	75.7	63.8
80,0°	50.5	67.9	57.9	44.5	39.4	39.1	46.9	49.3	47.0	42.7	45.1	43.7	39.7	35.6	30.4
82,5°	10.3	10.3	10.1	10.2	10.7	12.0	13.9	12.3	12.7	11.7	12.6	11.6	11.2	11.0	10.8
85,0°	6.2	6.2	6.2	6.1	6.1	6.1	6.0	5.9	5.8	5.6	5.5	5.3	5.1	5.0	4.9
87,5°	3.2	3.2	3.2	3.2	3.2	3.1	3.0	3.0	3.0	2.9	2.8	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_334
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	364.3	365.1	365.8	365.8	365.5	365.4	366.1	366.1	366.9	368.0	368.3	368.8	369.0	369.2	369.1
5,0°	372.6	372.7	374.4	374.5	376.2	377.2	378.2	378.1	378.2	377.9	379.2	379.2	379.0	378.7	378.3
7,5°	372.2	373.0	375.2	377.0	379.0	380.7	382.6	383.5	384.6	384.6	384.8	384.6	385.8	386.3	387.3
10,0°	375.5	375.9	375.9	377.8	378.9	380.5	381.6	383.0	382.4	383.8	384.3	384.5	384.9	385.6	386.2
12,5°	376.3	377.0	377.5	378.9	380.2	383.0	383.5	384.6	383.7	383.7	382.4	382.0	382.8	382.0	381.6
15,0°	377.8	377.5	376.8	376.1	375.8	377.1	377.5	378.5	378.1	377.5	377.4	378.2	377.5	378.9	379.9
17,5°	376.5	376.2	375.8	373.6	371.2	371.4	369.7	369.9	370.4	372.0	370.3	371.5	370.6	371.4	370.4
20,0°	372.8	373.3	373.2	375.5	372.9	370.5	366.2	364.2	361.9	362.7	362.3	362.4	361.6	361.9	360.7
22,5°	372.3	370.2	369.6	367.3	364.1	363.0	360.6	357.1	354.0	352.5	351.2	349.9	350.1	348.1	348.8
25,0°	363.0	361.2	360.4	357.9	354.5	352.2	350.1	348.9	347.5	343.9	341.3	338.8	335.5	333.8	333.2
27,5°	357.7	355.3	351.5	348.4	345.9	342.4	336.3	333.8	332.0	326.7	321.9	318.9	316.8	315.0	313.2
30,0°	350.3	348.1	344.4	337.4	330.6	325.4	322.2	317.4	312.2	307.9	304.0	298.6	295.7	295.2	293.9
32,5°	340.8	333.6	328.9	324.2	318.9	313.0	306.2	299.8	293.8	288.9	283.5	278.1	274.6	271.9	269.4
35,0°	332.1	324.0	315.4	309.9	303.3	295.1	286.0	277.2	269.4	264.4	257.7	252.1	247.9	244.9	242.0
37,5°	324.2	315.3	305.4	297.9	291.8	281.4	271.5	261.3	251.3	242.2	233.2	226.3	222.7	218.0	213.1
40,0°	316.6	306.5	294.1	284.1	274.2	262.4	252.0	239.8	228.9	221.6	213.1	204.3	196.7	189.8	184.7
42,5°	306.4	294.5	283.0	272.1	257.6	243.2	234.5	224.1	212.6	201.6	190.8	181.0	173.2	165.3	159.1
45,0°	295.9	284.8	269.4	256.0	243.0	231.9	219.1	206.3	193.7	181.5	170.7	159.0	151.5	143.1	136.0
47,5°	292.7	276.4	257.1	243.5	228.8	215.6	201.4	188.6	175.0	162.8	151.2	140.4	132.1	124.7	116.8
50,0°	290.2	270.1	249.2	231.2	214.9	197.9	184.8	169.6	156.5	144.6	132.8	122.8	112.7	104.7	97.9
52,5°	282.5	259.8	242.3	217.1	198.4	181.2	166.2	150.7	136.9	126.8	117.7	107.1	98.5	90.0	82.4
55,0°	284.1	257.7	230.1	204.4	183.1	165.1	148.2	131.4	120.2	110.1	101.5	92.5	83.4	75.2	68.4
57,5°	277.1	250.3	225.4	199.2	177.5	160.1	137.7	120.6	107.5	97.0	86.4	77.2	68.9	61.8	56.1
60,0°	271.7	246.7	221.1	197.6	176.9	154.8	129.8	111.7	98.2	86.1	73.0	63.5	56.4	50.5	45.9
62,5°	264.8	236.3	210.0	189.8	165.1	140.0	121.2	103.6	85.7	66.5	57.0	50.5	45.7	41.8	38.5
65,0°	258.3	229.0	201.3	177.5	148.6	121.2	100.8	85.9	67.9	54.3	46.6	41.2	37.5	34.7	32.5
67,5°	242.8	215.7	189.1	163.0	132.3	107.0	87.8	61.6	49.0	42.0	37.3	33.9	30.8	28.8	27.2
70,0°	192.3	176.1	164.8	143.8	113.6	92.8	72.3	51.5	41.4	33.1	29.9	27.2	25.3	24.1	22.9
72,5°	127.9	125.3	123.6	114.2	91.3	79.6	52.4	40.4	31.9	26.1	22.7	21.1	20.2	19.7	19.1
75,0°	87.2	80.4	76.9	69.8	57.4	47.0	31.0	30.1	23.1	19.3	17.9	16.9	16.3	15.8	15.4
77,5°	54.1	49.4	43.0	40.4	36.5	27.1	21.8	20.2	15.8	14.9	14.1	13.5	12.9	12.5	12.1
80,0°	24.5	23.0	21.7	18.0	15.5	14.7	15.1	13.9	11.9	11.2	10.8	10.3	9.8	9.5	9.1
82,5°	9.8	9.6	9.4	8.9	8.8	8.7	8.5	8.3	8.1	7.9	7.6	7.3	7.0	6.7	6.3
85,0°	4.8	4.7	4.7	4.7	4.6	4.6	4.6	4.5	4.4	4.3	4.1	4.0	3.9	3.8	3.7
87,5°	2.5	2.4	2.5	2.3	2.3	2.2	2.1	2.0	1.8	1.7	1.6	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_334
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	368.8	368.7	369.1	369.4	369.9	370.0	369.5	351.3	350.3	350.3	349.4	348.5	347.5	346.6	346.0
5,0°	378.8	379.3	379.3	379.3	378.4	378.0	378.1	347.8	346.4	344.3	342.5	340.9	339.7	338.0	337.1
7,5°	387.1	386.5	387.3	388.3	387.3	386.1	385.9	341.0	337.9	336.2	335.0	333.2	331.2	329.2	327.2
10,0°	387.1	386.1	385.0	384.4	384.3	383.4	382.0	340.4	336.6	333.8	330.4	326.8	323.5	320.9	317.2
12,5°	382.3	383.3	385.7	385.9	386.0	385.9	386.2	338.4	334.9	330.1	323.8	320.3	316.9	311.9	307.5
15,0°	379.6	381.1	382.3	380.7	381.0	379.0	378.1	339.0	334.9	330.7	325.8	319.6	313.6	306.7	299.9
17,5°	370.8	371.7	371.6	372.2	371.2	371.0	369.4	339.2	334.1	326.5	320.3	314.2	308.5	301.1	293.7
20,0°	362.1	361.2	362.0	362.1	361.6	363.0	362.2	342.6	333.4	325.7	317.0	308.6	300.4	293.7	287.0
22,5°	348.3	346.7	346.6	348.8	350.0	349.8	349.7	341.9	332.8	324.4	315.2	304.7	297.7	289.0	281.5
25,0°	332.5	332.7	331.7	332.2	332.5	332.5	333.0	340.7	330.3	320.9	312.0	303.8	295.0	286.4	277.2
27,5°	313.4	313.7	313.3	311.0	311.4	311.8	312.4	343.0	332.1	320.5	310.1	299.3	290.6	281.4	270.5
30,0°	292.3	290.8	288.8	289.1	290.7	290.7	290.7	345.1	332.4	320.1	308.0	297.0	286.5	275.6	264.2
32,5°	266.0	263.9	263.7	262.4	261.8	263.5	266.5	346.7	335.8	321.5	307.7	297.5	285.3	271.5	260.2
35,0°	236.8	234.5	232.7	231.8	232.9	233.9	232.9	352.6	337.5	322.6	310.4	297.7	284.4	269.6	255.5
37,5°	210.5	206.6	204.1	201.1	199.8	200.2	200.5	353.4	339.3	321.8	307.8	293.5	278.3	264.9	252.9
40,0°	180.8	176.8	173.0	170.0	167.6	167.6	165.7	353.9	336.6	318.3	304.3	291.3	274.1	261.5	248.9
42,5°	154.3	149.4	145.4	142.2	138.7	138.0	137.4	351.4	332.1	314.3	298.0	283.3	267.4	253.6	239.0
45,0°	130.4	124.4	119.4	114.8	112.8	111.2	110.9	358.8	333.8	314.6	297.7	276.2	260.8	245.8	226.6
47,5°	108.9	103.2	98.0	93.3	90.5	89.0	88.2	354.8	328.1	304.8	286.0	265.2	251.3	232.6	213.6
50,0°	91.3	85.4	79.8	75.5	72.5	71.3	71.0	355.3	327.6	301.5	277.4	256.4	241.7	220.0	206.9
52,5°	76.0	69.9	65.1	61.4	59.6	58.3	57.8	352.2	319.8	294.3	273.3	256.0	235.6	215.5	199.2
55,0°	62.3	57.1	53.6	51.0	49.8	49.1	48.8	350.0	316.1	287.7	264.0	248.3	226.6	210.6	195.0
57,5°	51.0	47.5	44.7	43.3	42.5	41.9	41.4	370.5	329.9	295.5	264.5	247.3	223.1	206.7	190.1
60,0°	42.7	40.4	38.7	37.6	36.9	36.4	36.5	381.4	344.4	311.0	276.6	247.2	225.8	205.8	195.6
62,5°	36.1	34.6	33.2	32.5	31.9	31.4	31.6	374.3	343.4	312.7	269.9	236.7	218.5	207.9	198.4
65,0°	30.9	29.6	28.8	28.2	27.9	27.4	27.5	355.3	333.3	300.3	248.0	213.1	200.3	195.7	192.9
67,5°	26.2	25.4	25.0	24.4	24.2	23.9	23.8	363.0	319.9	269.7	221.7	197.5	196.1	184.5	176.2
70,0°	22.4	21.7	21.3	20.9	20.5	20.4	20.3	380.9	318.5	260.7	215.5	211.5	193.7	171.9	159.3
72,5°	18.6	18.0	17.7	17.5	17.2	17.0	16.9	359.8	306.3	278.3	225.9	188.4	160.9	138.0	134.1
75,0°	15.1	14.8	14.5	14.1	13.8	13.7	13.7	291.4	253.8	231.4	177.1	131.4	102.2	90.4	87.8
77,5°	11.8	11.5	11.1	10.8	10.4	10.3	10.1	154.9	151.7	125.3	80.6	54.6	46.7	44.8	46.0
80,0°	8.6	8.2	7.9	7.6	7.4	7.2	7.1	63.3	48.9	34.1	30.1	25.4	24.1	25.7	25.4
82,5°	5.9	5.5	5.3	5.0	4.9	4.6	4.6	10.2	9.5	9.1	9.0	9.1	9.9	9.4	9.9
85,0°	3.4	3.1	3.0	2.7	2.6	2.3	2.4	5.9	5.9	5.7	5.6	5.4	5.2	5.1	4.9
87,5°	1.2	1.2	1.1	1.0	0.9	0.8	0.8	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_334
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	346.1	345.7	345.4	345.2	344.6	343.7	343.2	342.5	342.0	341.0	340.2	340.0	339.5	340.1	339.5
5,0°	335.1	333.9	333.3	332.1	330.7	329.5	328.7	327.5	327.4	326.1	324.3	322.8	321.4	320.6	319.9
7,5°	325.3	323.6	322.3	320.1	318.0	316.5	313.7	312.2	310.0	308.4	305.8	304.2	301.9	300.4	298.8
10,0°	313.9	310.8	307.2	303.7	300.9	298.3	295.6	292.7	290.5	288.2	286.1	284.0	281.6	279.4	278.2
12,5°	303.3	298.4	294.7	290.5	286.5	282.3	279.4	275.5	271.6	269.4	267.6	264.3	262.7	260.4	258.3
15,0°	295.6	289.6	283.6	278.6	272.0	266.5	262.1	258.0	255.1	251.3	247.9	245.2	242.6	240.9	238.5
17,5°	286.3	279.3	272.1	265.8	260.0	255.0	249.7	245.4	241.2	236.3	232.2	228.4	225.7	223.6	221.9
20,0°	278.8	270.4	263.1	257.0	252.2	246.7	239.7	233.7	228.3	224.2	219.5	215.1	210.8	207.7	206.0
22,5°	273.0	264.8	257.0	248.2	241.6	235.3	229.8	223.5	217.2	211.7	206.3	202.3	199.6	197.1	194.6
25,0°	267.2	257.4	249.4	241.3	234.0	226.8	219.9	212.9	206.3	200.8	197.0	192.7	189.0	186.1	183.1
27,5°	260.3	250.8	242.0	234.0	225.3	217.4	209.9	202.6	195.8	189.9	186.3	182.6	178.8	175.1	172.0
30,0°	253.7	244.5	234.6	226.2	217.8	207.6	199.7	193.5	187.6	181.6	177.4	173.7	169.5	165.9	162.9
32,5°	249.7	238.2	227.6	216.7	207.5	198.6	191.3	185.5	178.3	171.9	167.9	163.8	160.1	157.1	153.6
35,0°	243.9	232.0	220.1	209.0	199.1	191.5	184.0	176.8	171.0	164.9	159.9	156.0	152.3	148.0	144.2
37,5°	240.2	226.7	212.8	202.0	192.8	184.3	176.3	169.2	163.1	158.4	153.7	149.6	144.2	139.8	136.0
40,0°	232.1	217.0	206.7	196.6	185.6	176.3	168.9	163.4	157.6	151.8	147.4	142.2	136.4	132.0	127.8
42,5°	222.2	209.0	198.8	185.9	176.3	169.4	162.5	156.5	151.0	146.0	140.7	136.2	130.3	125.6	119.9
45,0°	213.6	201.7	187.6	176.7	169.9	163.2	157.5	151.8	146.1	140.4	135.4	129.4	124.3	118.0	112.2
47,5°	201.6	190.4	178.7	172.2	167.0	160.3	153.4	147.2	141.4	135.2	128.5	123.1	118.1	110.7	105.1
50,0°	193.9	181.1	174.1	167.2	161.5	155.9	149.4	143.4	136.3	129.1	121.9	115.9	108.8	102.6	96.3
52,5°	184.7	177.4	172.1	166.1	159.0	152.1	144.9	137.7	130.8	123.2	115.1	108.6	102.0	94.8	88.1
55,0°	184.9	176.0	169.0	162.2	154.2	148.9	141.4	133.0	124.4	115.2	107.4	99.9	92.7	85.9	80.7
57,5°	179.5	171.9	163.4	155.2	148.9	142.6	135.7	127.1	118.9	110.0	102.6	96.0	87.7	79.7	73.6
60,0°	183.1	170.1	162.7	155.5	145.7	138.2	131.4	121.8	114.0	106.1	99.0	91.1	81.9	74.2	67.6
62,5°	185.8	172.9	164.5	155.1	142.7	132.8	125.2	115.5	106.6	99.3	91.2	82.1	75.1	68.3	60.9
65,0°	179.0	168.8	160.0	148.5	138.8	127.8	120.8	110.3	100.1	91.9	81.9	72.3	64.5	58.6	51.3
67,5°	165.0	155.7	145.1	134.0	125.5	117.0	111.8	102.3	93.0	84.1	72.6	63.4	56.0	46.4	41.4
70,0°	149.9	136.6	120.0	106.2	100.0	95.3	91.0	85.5	81.1	74.0	63.3	56.0	47.9	39.9	35.4
72,5°	123.9	106.0	89.8	78.8	72.2	68.3	66.8	65.5	64.5	61.1	53.0	48.1	38.0	33.0	29.5
75,0°	85.5	76.0	66.6	60.9	58.4	54.4	49.8	47.5	45.7	43.6	38.5	34.2	28.2	27.0	24.0
77,5°	48.5	48.7	46.5	44.6	42.3	38.5	35.1	33.6	31.5	30.7	28.8	25.0	22.5	21.2	19.0
80,0°	24.7	26.2	26.3	25.4	24.5	23.0	21.0	20.5	20.3	19.4	18.3	17.7	17.3	16.3	15.2
82,5°	9.8	10.4	10.4	10.8	11.2	11.4	11.3	11.2	11.2	11.3	11.6	11.6	11.4	11.2	11.0
85,0°	4.8	4.7	4.6	4.4	4.3	4.2	4.2	4.2	4.3	4.3	4.6	4.9	5.2	5.5	5.6
87,5°	2.7	2.5	2.5	2.4	2.4	2.3	2.2	2.1	2.1	2.0	1.9	1.8	1.7	1.6	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_334
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	0.5	0.5
2,5°	339.0	338.7	337.7	336.6	335.7	335.7	335.5	335.9	335.5	335.7	335.2	334.7	334.9	4.2	4.7
5,0°	319.4	318.2	317.0	316.1	315.5	314.7	314.4	314.2	314.0	314.1	314.4	313.3	313.3	8.3	13.1
7,5°	297.5	295.2	294.7	292.5	291.5	290.7	290.0	289.3	288.6	288.9	288.4	288.1	288.6	12.2	25.3
10,0°	276.3	274.4	273.1	271.4	270.5	270.1	269.7	268.8	267.8	268.3	267.4	267.0	266.6	15.9	41.2
12,5°	255.4	253.4	252.0	251.1	249.7	248.5	247.3	246.8	246.3	246.3	246.7	246.8	247.4	19.4	60.6
15,0°	237.2	235.8	233.2	231.1	229.6	228.1	228.3	228.1	226.4	225.6	223.7	222.7	223.2	22.6	83.2
17,5°	219.4	217.0	215.1	213.2	211.5	211.6	211.1	211.3	210.6	210.2	209.3	208.7	208.6	25.6	108.9
20,0°	204.5	202.3	200.4	199.1	198.1	197.5	196.9	196.7	195.9	195.2	194.9	194.9	195.4	28.5	137.4
22,5°	191.9	189.4	186.8	185.5	185.2	184.8	183.7	182.5	182.5	182.6	181.7	180.8	180.9	31.1	168.5
25,0°	179.8	178.0	177.1	175.9	173.6	172.3	171.8	172.0	171.4	170.6	170.5	170.8	171.0	33.4	201.9
27,5°	170.3	168.3	165.8	163.0	161.9	160.9	160.5	160.0	159.4	158.8	159.2	159.0	158.2	35.3	237.3
30,0°	160.1	157.8	155.3	153.8	152.1	150.9	150.3	149.6	148.8	148.2	147.9	148.0	148.2	37.0	274.3
32,5°	150.3	147.9	145.7	143.7	141.6	139.8	138.9	138.3	137.0	136.7	136.2	135.8	135.9	38.3	312.6
35,0°	140.5	137.3	134.8	133.0	130.4	127.8	126.4	125.5	124.6	123.3	122.9	122.3	122.1	39.3	351.9
37,5°	131.2	127.4	124.3	121.1	118.7	116.0	114.7	112.7	111.4	110.7	110.3	109.6	109.2	39.9	391.8
40,0°	122.0	118.4	114.9	110.6	107.7	104.9	102.0	100.4	99.0	98.1	96.6	96.0	95.9	40.3	432.1
42,5°	113.8	109.5	105.1	101.1	98.0	93.9	91.7	89.0	87.4	86.0	84.1	83.6	83.5	40.3	472.3
45,0°	106.5	101.6	96.4	92.1	87.8	84.4	81.2	78.1	75.8	74.0	72.9	72.1	71.6	40.4	512.8
47,5°	98.9	93.4	87.9	83.7	79.1	75.1	71.8	68.9	66.1	64.3	63.0	62.4	62.1	40.4	553.2
50,0°	90.5	84.8	79.7	75.5	70.9	67.0	63.7	59.8	57.4	55.9	54.3	53.6	53.3	40.4	593.5
52,5°	82.4	77.7	72.5	68.1	63.7	59.6	56.0	52.4	50.6	48.7	47.3	47.1	46.4	40.5	634.1
55,0°	75.2	71.1	66.0	60.6	56.2	52.7	49.5	46.4	44.4	43.0	42.0	41.5	41.3	40.5	674.6
57,5°	68.3	63.5	58.2	53.5	49.7	46.3	43.8	41.5	39.6	38.3	37.7	37.2	37.0	41.1	715.7
60,0°	61.9	55.6	50.8	46.8	43.8	41.0	38.9	37.0	35.4	34.3	33.7	33.3	33.2	42.3	758.0
62,5°	52.7	47.9	44.6	41.6	38.4	36.4	34.3	32.8	31.5	30.5	29.9	29.4	29.3	42.6	800.5
65,0°	45.4	41.7	39.1	36.4	34.0	32.4	30.6	29.3	28.3	27.4	26.9	26.6	26.4	41.7	842.2
67,5°	38.1	35.8	33.7	31.6	29.8	28.7	27.4	26.2	25.2	24.5	23.9	23.4	23.3	39.6	881.8
70,0°	32.0	30.3	29.0	27.6	26.3	25.1	24.2	23.2	22.4	21.6	21.0	20.7	20.7	37.3	919.1
72,5°	27.1	25.2	24.2	23.4	22.5	21.7	20.8	20.0	19.2	18.3	18.0	17.5	17.6	32.6	951.7
75,0°	22.0	20.9	19.9	19.4	18.7	18.1	17.3	16.7	15.9	15.3	14.8	14.5	14.2	24.1	975.8
77,5°	18.0	17.3	16.5	15.7	15.1	14.4	14.1	13.4	12.8	12.2	11.5	11.3	11.2	13.5	989.3
80,0°	14.5	13.7	13.1	12.4	11.8	11.2	10.6	10.0	9.3	8.7	8.4	8.0	7.9	6.3	995.6
82,5°	10.7	10.3	9.9	9.4	8.8	8.2	7.4	6.8	6.2	5.8	5.5	5.2	5.2	2.5	998.2
85,0°	5.7	5.7	5.6	5.5	5.3	4.8	4.4	3.9	3.5	3.1	2.8	2.1	2.5	1.3	999.4
87,5°	1.4	1.3	1.3	1.3	1.3	1.4	1.3	1.2	1.1	0.9	0.6	0.5	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_334
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	8770	62.9	66.0	64.4
95	241	252	8321	58.9	61.8	60.4
90	229	250	7907	55.3	58.0	56.6
85	216	248	7458	51.6	54.0	52.8
80	203	246	7009	47.9	50.2	49.0
75	190	243	6560	44.3	46.5	45.4
70	178	241	6146	41.2	43.2	42.2
65	165	238	5697	37.9	39.6	38.8
60	152	235	5248	34.7	36.3	35.5
55	140	232	4834	31.8	33.2	32.5
50	127	229	4385	28.7	30.0	29.4
45	114	225	3936	25.7	26.8	26.2
40	102	221	3522	23.0	24.1	23.6
35	89	216	3073	20.2	21.1	20.6
30	76	210	2624	17.5	18.3	17.9
25	63	203	2175	14.9	15.4	15.2
20	51	195	1761	12.6	13.0	12.8
15	38	184	1312	10.0	10.4	10.2
10	25	169	863	7.6	7.9	7.8
9	22	164	760	6.9	7.1	7.0