


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_351
	Version	post-top or side-entry mounting, Colour Switch
	Optic	asymmetric, extremely wide distribution with an additional rear light component (ST0.5ST0.5)
	Cover	transparent, PMMA
	Lamps	LED 2200 K CRI ≥ 70
	Controlgear	ECG SITECO iQ
	Setting	individual position
Rated values		Net luminous flux = 6780 lm Power consumption = 63.6 W Luminous efficacy = 106.6 lm/W
		serial documentation 25.06.2024
		

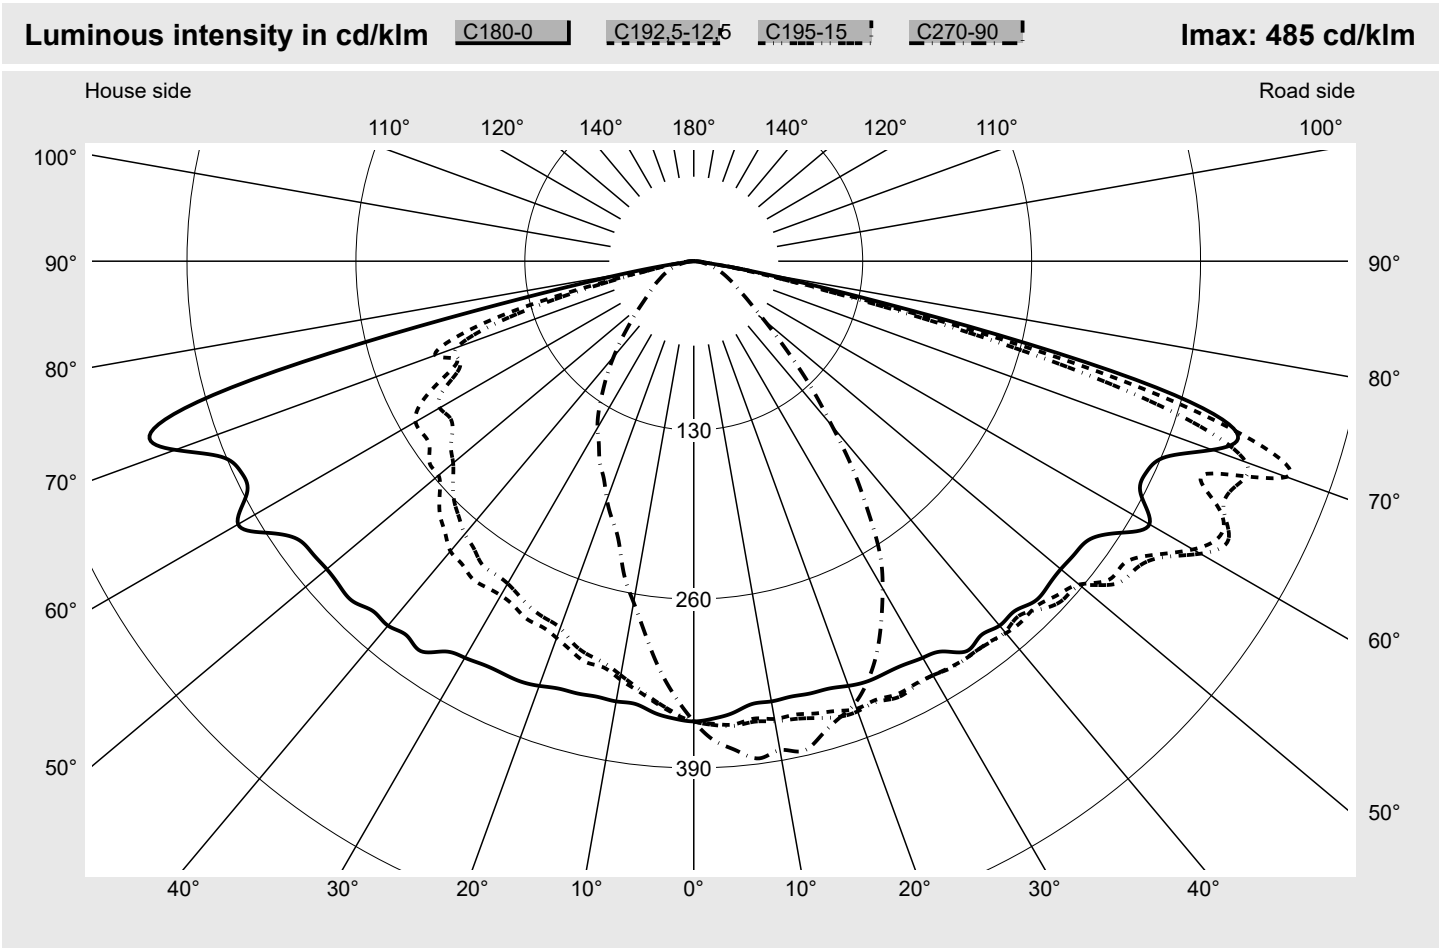

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	485.5
Imax 80°	67.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family
Streetlight 11 mini LED

Order number: **5XC2HC1F08HE**
EAN: **4069025225443**

LP number
59339_351

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

sit^eco

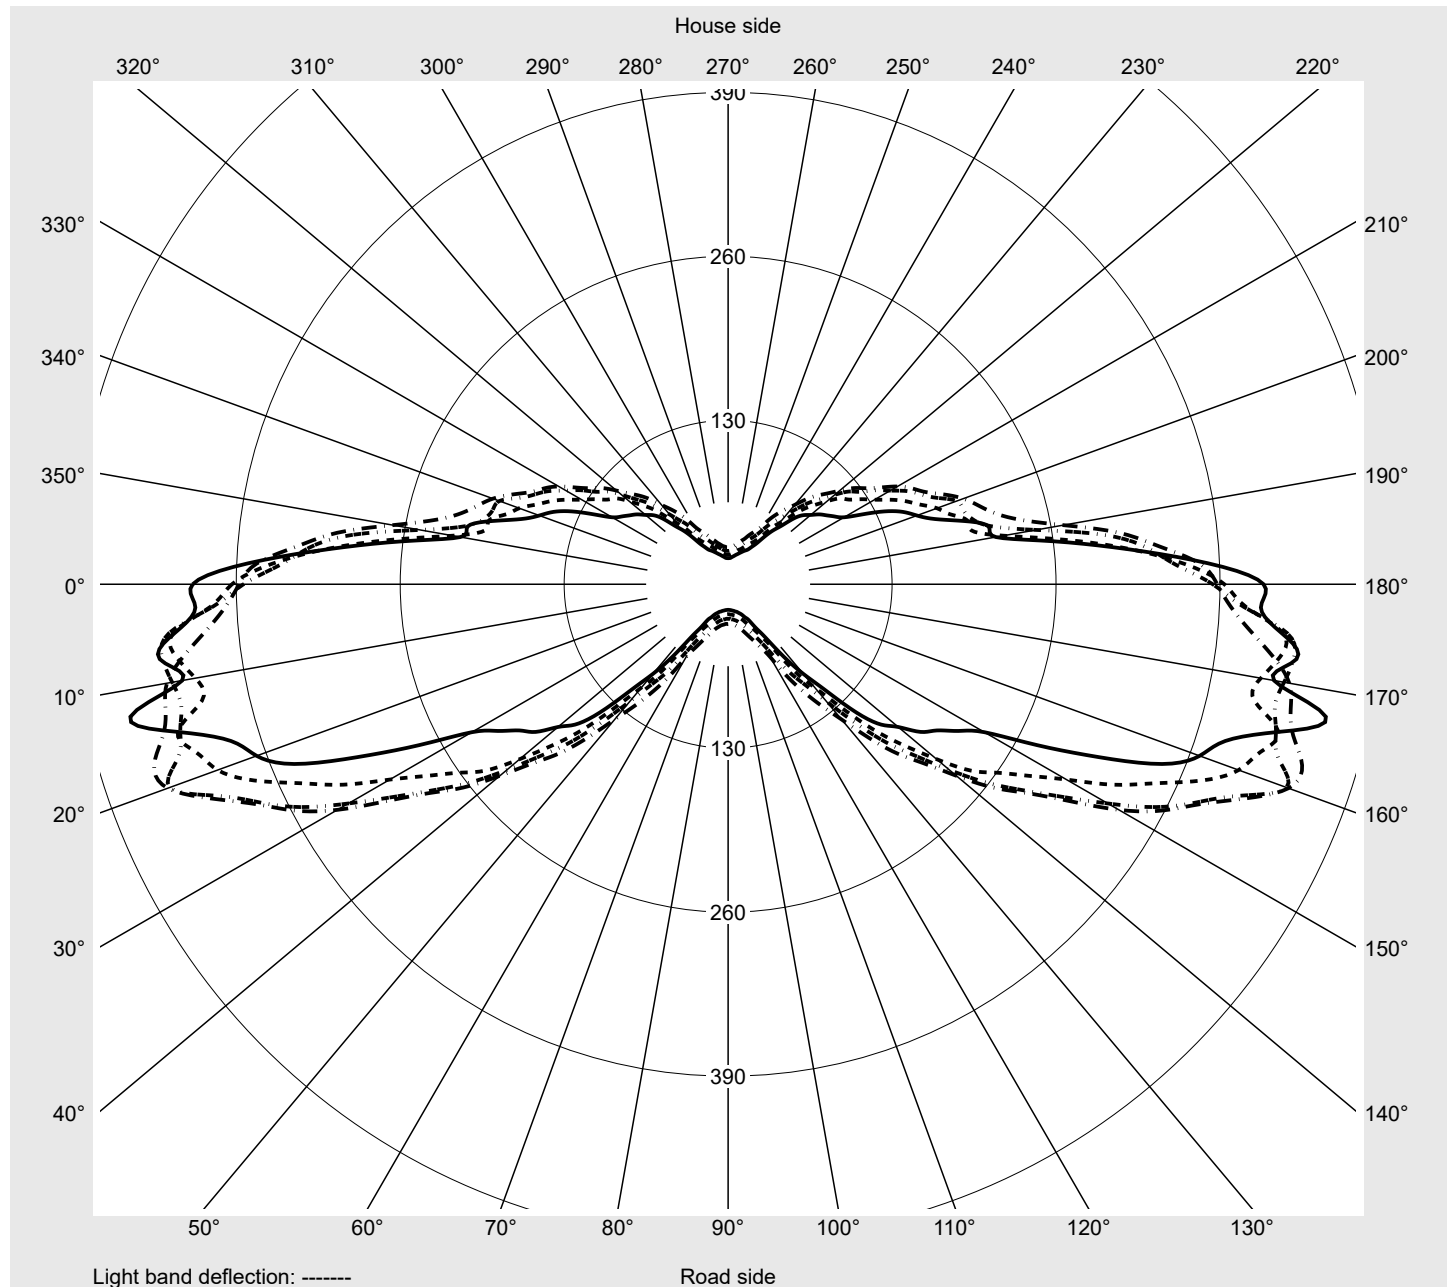

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_351
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	352.2	353.7	353.6	354.5	355.2	356.3	357.3	358.1	359.3	360.3	361.4	361.6	362.5	363.1	364.4
5,0°	348.9	350.4	352.9	355.0	355.9	357.8	358.9	360.2	361.9	363.3	364.6	366.3	367.5	369.4	370.9
7,5°	343.7	345.7	348.5	350.3	352.6	355.0	357.4	360.2	362.6	363.9	366.3	368.4	369.8	370.1	371.3
10,0°	344.0	346.0	348.4	351.2	353.8	357.7	359.5	362.4	366.1	368.0	369.9	370.9	372.9	372.9	374.6
12,5°	343.3	346.8	349.2	351.8	354.6	357.5	360.8	363.4	366.6	369.3	370.9	372.6	373.6	374.9	375.5
15,0°	344.5	349.3	352.8	355.6	357.2	360.4	364.0	366.7	369.8	371.0	372.8	374.2	375.1	377.1	377.5
17,5°	344.9	349.8	353.7	357.2	360.0	363.0	367.8	372.1	372.9	373.1	373.7	374.7	374.8	374.6	375.4
20,0°	347.8	353.8	356.7	361.3	364.1	366.6	368.6	370.3	372.5	374.8	376.2	377.0	377.2	375.3	374.4
22,5°	349.9	355.1	357.8	360.3	363.5	365.5	367.2	368.9	370.7	372.3	372.7	374.2	374.0	373.2	372.8
25,0°	349.7	354.9	358.2	361.9	364.4	368.1	370.5	372.3	371.0	369.6	371.2	369.1	369.0	368.2	364.2
27,5°	350.1	356.6	359.2	364.0	366.5	367.4	368.7	367.1	369.5	369.0	367.9	365.9	364.3	364.7	362.3
30,0°	352.4	358.7	362.9	368.0	369.2	368.0	368.0	367.1	366.8	366.9	366.5	364.0	360.0	358.1	354.2
32,5°	356.1	363.9	366.7	365.9	366.6	369.7	370.6	370.3	368.4	365.5	363.8	361.5	356.7	351.8	347.3
35,0°	366.3	369.7	370.2	371.2	370.3	370.6	370.4	369.0	367.4	364.5	361.6	356.9	351.8	346.3	339.8
37,5°	363.0	370.4	372.4	372.1	372.2	370.7	371.2	370.3	369.3	367.2	359.3	352.7	346.2	341.9	334.5
40,0°	366.1	370.8	371.4	372.0	373.5	373.7	372.7	372.2	366.9	358.9	355.6	352.2	345.4	337.8	323.0
42,5°	365.3	370.9	371.2	371.4	374.9	374.8	370.2	369.5	365.0	357.0	352.6	345.3	335.1	325.5	320.0
45,0°	370.5	375.7	377.4	376.4	376.0	374.4	378.5	375.5	369.3	361.5	353.6	346.2	334.0	323.8	308.8
47,5°	369.8	376.4	376.9	377.8	379.8	380.1	385.5	382.1	375.5	365.9	357.9	346.3	335.0	323.9	310.9
50,0°	368.7	377.2	379.8	381.5	384.6	387.1	388.7	385.1	380.7	376.6	365.6	350.8	335.7	320.6	305.8
52,5°	369.7	379.2	380.8	383.8	396.2	402.7	408.2	401.0	390.7	381.3	371.0	358.2	342.2	325.4	303.1
55,0°	372.7	379.3	379.9	383.0	391.9	404.8	414.1	410.6	401.4	391.3	378.4	363.2	342.3	324.3	307.1
57,5°	389.0	394.5	400.4	405.9	413.2	420.5	424.9	420.7	412.3	397.1	380.9	362.5	342.8	318.0	297.5
60,0°	404.9	409.9	418.7	427.9	442.5	443.6	450.2	449.1	442.2	417.0	389.7	369.9	351.1	320.8	295.0
62,5°	387.8	398.6	415.0	435.3	451.8	456.9	463.9	477.2	472.8	443.8	412.7	388.5	357.7	319.5	288.5
65,0°	384.3	409.1	445.0	452.4	447.6	444.2	449.7	457.3	471.2	438.3	409.5	382.6	347.6	313.6	284.5
67,5°	393.4	410.9	441.4	441.4	428.9	427.4	451.8	442.5	430.7	406.6	373.4	344.2	309.7	282.7	260.5
70,0°	424.6	422.8	440.1	454.6	439.5	485.5	452.2	413.3	397.8	372.4	324.4	276.3	234.6	216.5	202.1
72,5°	438.0	416.1	439.2	466.1	444.6	440.9	388.1	346.1	334.3	303.8	246.4	195.7	160.9	145.0	131.4
75,0°	351.5	331.1	329.2	378.1	328.1	302.9	247.8	217.5	209.5	200.0	168.0	137.7	121.1	112.0	99.9
77,5°	153.4	188.1	189.7	181.6	140.2	118.0	101.0	95.5	96.2	100.9	98.8	90.3	82.9	75.7	63.8
80,0°	50.5	67.9	57.9	44.5	39.4	39.1	46.9	49.3	47.0	42.7	45.1	43.7	39.7	35.6	30.4
82,5°	10.3	10.3	10.1	10.2	10.7	12.0	13.9	12.3	12.7	11.7	12.6	11.6	11.2	11.0	10.8
85,0°	6.2	6.2	6.2	6.1	6.1	6.1	6.0	5.9	5.8	5.6	5.5	5.3	5.1	5.0	4.9
87,5°	3.2	3.2	3.2	3.2	3.2	3.1	3.0	3.0	3.0	2.9	2.8	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_351
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	364.3	365.1	365.8	365.8	365.5	365.4	366.1	366.1	366.9	368.0	368.3	368.8	369.0	369.2	369.1
5,0°	372.6	372.7	374.4	374.5	376.2	377.2	378.2	378.1	378.2	377.9	379.2	379.2	379.0	378.7	378.3
7,5°	372.2	373.0	375.2	377.0	379.0	380.7	382.6	383.5	384.6	384.6	384.8	384.6	385.8	386.3	387.3
10,0°	375.5	375.9	375.9	377.8	378.9	380.5	381.6	383.0	382.4	383.8	384.3	384.5	384.9	385.6	386.2
12,5°	376.3	377.0	377.5	378.9	380.2	383.0	383.5	384.6	383.7	383.7	382.4	382.0	382.8	382.0	381.6
15,0°	377.8	377.5	376.8	376.1	375.8	377.1	377.5	378.5	378.1	377.5	377.4	378.2	377.5	378.9	379.9
17,5°	376.5	376.2	375.8	373.6	371.2	371.4	369.7	369.9	370.4	372.0	370.3	371.5	370.6	371.4	370.4
20,0°	372.8	373.3	373.2	375.5	372.9	370.5	366.2	364.2	361.9	362.7	362.3	362.4	361.6	361.9	360.7
22,5°	372.3	370.2	369.6	367.3	364.1	363.0	360.6	357.1	354.0	352.5	351.2	349.9	350.1	348.1	348.8
25,0°	363.0	361.2	360.4	357.9	354.5	352.2	350.1	348.9	347.5	343.9	341.3	338.8	335.5	333.8	333.2
27,5°	357.7	355.3	351.5	348.4	345.9	342.4	336.3	333.8	332.0	326.7	321.9	318.9	316.8	315.0	313.2
30,0°	350.3	348.1	344.4	337.4	330.6	325.4	322.2	317.4	312.2	307.9	304.0	298.6	295.7	295.2	293.9
32,5°	340.8	333.6	328.9	324.2	318.9	313.0	306.2	299.8	293.8	288.9	283.5	278.1	274.6	271.9	269.4
35,0°	332.1	324.0	315.4	309.9	303.3	295.1	286.0	277.2	269.4	264.4	257.7	252.1	247.9	244.9	242.0
37,5°	324.2	315.3	305.4	297.9	291.8	281.4	271.5	261.3	251.3	242.2	233.2	226.3	222.7	218.0	213.1
40,0°	316.6	306.5	294.1	284.1	274.2	262.4	252.0	239.8	228.9	221.6	213.1	204.3	196.7	189.8	184.7
42,5°	306.4	294.5	283.0	272.1	257.6	243.2	234.5	224.1	212.6	201.6	190.8	181.0	173.2	165.3	159.1
45,0°	295.9	284.8	269.4	256.0	243.0	231.9	219.1	206.3	193.7	181.5	170.7	159.0	151.5	143.1	136.0
47,5°	292.7	276.4	257.1	243.5	228.8	215.6	201.4	188.6	175.0	162.8	151.2	140.4	132.1	124.7	116.8
50,0°	290.2	270.1	249.2	231.2	214.9	197.9	184.8	169.6	156.5	144.6	132.8	122.8	112.7	104.7	97.9
52,5°	282.5	259.8	242.3	217.1	198.4	181.2	166.2	150.7	136.9	126.8	117.7	107.1	98.5	90.0	82.4
55,0°	284.1	257.7	230.1	204.4	183.1	165.1	148.2	131.4	120.2	110.1	101.5	92.5	83.4	75.2	68.4
57,5°	277.1	250.3	225.4	199.2	177.5	160.1	137.7	120.6	107.5	97.0	86.4	77.2	68.9	61.8	56.1
60,0°	271.7	246.7	221.1	197.6	176.9	154.8	129.8	111.7	98.2	86.1	73.0	63.5	56.4	50.5	45.9
62,5°	264.8	236.3	210.0	189.8	165.1	140.0	121.2	103.6	85.7	66.5	57.0	50.5	45.7	41.8	38.5
65,0°	258.3	229.0	201.3	177.5	148.6	121.2	100.8	85.9	67.9	54.3	46.6	41.2	37.5	34.7	32.5
67,5°	242.8	215.7	189.1	163.0	132.3	107.0	87.8	61.6	49.0	42.0	37.3	33.9	30.8	28.8	27.2
70,0°	192.3	176.1	164.8	143.8	113.6	92.8	72.3	51.5	41.4	33.1	29.9	27.2	25.3	24.1	22.9
72,5°	127.9	125.3	123.6	114.2	91.3	79.6	52.4	40.4	31.9	26.1	22.7	21.1	20.2	19.7	19.1
75,0°	87.2	80.4	76.9	69.8	57.4	47.0	31.0	30.1	23.1	19.3	17.9	16.9	16.3	15.8	15.4
77,5°	54.1	49.4	43.0	40.4	36.5	27.1	21.8	20.2	15.8	14.9	14.1	13.5	12.9	12.5	12.1
80,0°	24.5	23.0	21.7	18.0	15.5	14.7	15.1	13.9	11.9	11.2	10.8	10.3	9.8	9.5	9.1
82,5°	9.8	9.6	9.4	8.9	8.8	8.7	8.5	8.3	8.1	7.9	7.6	7.3	7.0	6.7	6.3
85,0°	4.8	4.7	4.7	4.7	4.6	4.6	4.6	4.5	4.4	4.3	4.1	4.0	3.9	3.8	3.7
87,5°	2.5	2.4	2.5	2.3	2.3	2.2	2.1	2.0	1.8	1.7	1.6	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_351
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	368.8	368.7	369.1	369.4	369.9	370.0	369.5	351.3	350.3	350.3	349.4	348.5	347.5	346.6	346.0
5,0°	378.8	379.3	379.3	379.3	378.4	378.0	378.1	347.8	346.4	344.3	342.5	340.9	339.7	338.0	337.1
7,5°	387.1	386.5	387.3	388.3	387.3	386.1	385.9	341.0	337.9	336.2	335.0	333.2	331.2	329.2	327.2
10,0°	387.1	386.1	385.0	384.4	384.3	383.4	382.0	340.4	336.6	333.8	330.4	326.8	323.5	320.9	317.2
12,5°	382.3	383.3	385.7	385.9	386.0	385.9	386.2	338.4	334.9	330.1	323.8	320.3	316.9	311.9	307.5
15,0°	379.6	381.1	382.3	380.7	381.0	379.0	378.1	339.0	334.9	330.7	325.8	319.6	313.6	306.7	299.9
17,5°	370.8	371.7	371.6	372.2	371.2	371.0	369.4	339.2	334.1	326.5	320.3	314.2	308.5	301.1	293.7
20,0°	362.1	361.2	362.0	362.1	361.6	363.0	362.2	342.6	333.4	325.7	317.0	308.6	300.4	293.7	287.0
22,5°	348.3	346.7	346.6	348.8	350.0	349.8	349.7	341.9	332.8	324.4	315.2	304.7	297.7	289.0	281.5
25,0°	332.5	332.7	331.7	332.2	332.5	332.5	333.0	340.7	330.3	320.9	312.0	303.8	295.0	286.4	277.2
27,5°	313.4	313.7	313.3	311.0	311.4	311.8	312.4	343.0	332.1	320.5	310.1	299.3	290.6	281.4	270.5
30,0°	292.3	290.8	288.8	289.1	290.7	290.7	290.7	345.1	332.4	320.1	308.0	297.0	286.5	275.6	264.2
32,5°	266.0	263.9	263.7	262.4	261.8	263.5	266.5	346.7	335.8	321.5	307.7	297.5	285.3	271.5	260.2
35,0°	236.8	234.5	232.7	231.8	232.9	233.9	232.9	352.6	337.5	322.6	310.4	297.7	284.4	269.6	255.5
37,5°	210.5	206.6	204.1	201.1	199.8	200.2	200.5	353.4	339.3	321.8	307.8	293.5	278.3	264.9	252.9
40,0°	180.8	176.8	173.0	170.0	167.6	167.6	165.7	353.9	336.6	318.3	304.3	291.3	274.1	261.5	248.9
42,5°	154.3	149.4	145.4	142.2	138.7	138.0	137.4	351.4	332.1	314.3	298.0	283.3	267.4	253.6	239.0
45,0°	130.4	124.4	119.4	114.8	112.8	111.2	110.9	358.8	333.8	314.6	297.7	276.2	260.8	245.8	226.6
47,5°	108.9	103.2	98.0	93.3	90.5	89.0	88.2	354.8	328.1	304.8	286.0	265.2	251.3	232.6	213.6
50,0°	91.3	85.4	79.8	75.5	72.5	71.3	71.0	355.3	327.6	301.5	277.4	256.4	241.7	220.0	206.9
52,5°	76.0	69.9	65.1	61.4	59.6	58.3	57.8	352.2	319.8	294.3	273.3	256.0	235.6	215.5	199.2
55,0°	62.3	57.1	53.6	51.0	49.8	49.1	48.8	350.0	316.1	287.7	264.0	248.3	226.6	210.6	195.0
57,5°	51.0	47.5	44.7	43.3	42.5	41.9	41.4	370.5	329.9	295.5	264.5	247.3	223.1	206.7	190.1
60,0°	42.7	40.4	38.7	37.6	36.9	36.4	36.5	381.4	344.4	311.0	276.6	247.2	225.8	205.8	195.6
62,5°	36.1	34.6	33.2	32.5	31.9	31.4	31.6	374.3	343.4	312.7	269.9	236.7	218.5	207.9	198.4
65,0°	30.9	29.6	28.8	28.2	27.9	27.4	27.5	355.3	333.3	300.3	248.0	213.1	200.3	195.7	192.9
67,5°	26.2	25.4	25.0	24.4	24.2	23.9	23.8	363.0	319.9	269.7	221.7	197.5	196.1	184.5	176.2
70,0°	22.4	21.7	21.3	20.9	20.5	20.4	20.3	380.9	318.5	260.7	215.5	211.5	193.7	171.9	159.3
72,5°	18.6	18.0	17.7	17.5	17.2	17.0	16.9	359.8	306.3	278.3	225.9	188.4	160.9	138.0	134.1
75,0°	15.1	14.8	14.5	14.1	13.8	13.7	13.7	291.4	253.8	231.4	177.1	131.4	102.2	90.4	87.8
77,5°	11.8	11.5	11.1	10.8	10.4	10.3	10.1	154.9	151.7	125.3	80.6	54.6	46.7	44.8	46.0
80,0°	8.6	8.2	7.9	7.6	7.4	7.2	7.1	63.3	48.9	34.1	30.1	25.4	24.1	25.7	25.4
82,5°	5.9	5.5	5.3	5.0	4.9	4.6	4.6	10.2	9.5	9.1	9.0	9.1	9.9	9.4	9.9
85,0°	3.4	3.1	3.0	2.7	2.6	2.3	2.4	5.9	5.9	5.7	5.6	5.4	5.2	5.1	4.9
87,5°	1.2	1.2	1.1	1.0	0.9	0.8	0.8	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_351
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	346.1	345.7	345.4	345.2	344.6	343.7	343.2	342.5	342.0	341.0	340.2	340.0	339.5	340.1	339.5
5,0°	335.1	333.9	333.3	332.1	330.7	329.5	328.7	327.5	327.4	326.1	324.3	322.8	321.4	320.6	319.9
7,5°	325.3	323.6	322.3	320.1	318.0	316.5	313.7	312.2	310.0	308.4	305.8	304.2	301.9	300.4	298.8
10,0°	313.9	310.8	307.2	303.7	300.9	298.3	295.6	292.7	290.5	288.2	286.1	284.0	281.6	279.4	278.2
12,5°	303.3	298.4	294.7	290.5	286.5	282.3	279.4	275.5	271.6	269.4	267.6	264.3	262.7	260.4	258.3
15,0°	295.6	289.6	283.6	278.6	272.0	266.5	262.1	258.0	255.1	251.3	247.9	245.2	242.6	240.9	238.5
17,5°	286.3	279.3	272.1	265.8	260.0	255.0	249.7	245.4	241.2	236.3	232.2	228.4	225.7	223.6	221.9
20,0°	278.8	270.4	263.1	257.0	252.2	246.7	239.7	233.7	228.3	224.2	219.5	215.1	210.8	207.7	206.0
22,5°	273.0	264.8	257.0	248.2	241.6	235.3	229.8	223.5	217.2	211.7	206.3	202.3	199.6	197.1	194.6
25,0°	267.2	257.4	249.4	241.3	234.0	226.8	219.9	212.9	206.3	200.8	197.0	192.7	189.0	186.1	183.1
27,5°	260.3	250.8	242.0	234.0	225.3	217.4	209.9	202.6	195.8	189.9	186.3	182.6	178.8	175.1	172.0
30,0°	253.7	244.5	234.6	226.2	217.8	207.6	199.7	193.5	187.6	181.6	177.4	173.7	169.5	165.9	162.9
32,5°	249.7	238.2	227.6	216.7	207.5	198.6	191.3	185.5	178.3	171.9	167.9	163.8	160.1	157.1	153.6
35,0°	243.9	232.0	220.1	209.0	199.1	191.5	184.0	176.8	171.0	164.9	159.9	156.0	152.3	148.0	144.2
37,5°	240.2	226.7	212.8	202.0	192.8	184.3	176.3	169.2	163.1	158.4	153.7	149.6	144.2	139.8	136.0
40,0°	232.1	217.0	206.7	196.6	185.6	176.3	168.9	163.4	157.6	151.8	147.4	142.2	136.4	132.0	127.8
42,5°	222.2	209.0	198.8	185.9	176.3	169.4	162.5	156.5	151.0	146.0	140.7	136.2	130.3	125.6	119.9
45,0°	213.6	201.7	187.6	176.7	169.9	163.2	157.5	151.8	146.1	140.4	135.4	129.4	124.3	118.0	112.2
47,5°	201.6	190.4	178.7	172.2	167.0	160.3	153.4	147.2	141.4	135.2	128.5	123.1	118.1	110.7	105.1
50,0°	193.9	181.1	174.1	167.2	161.5	155.9	149.4	143.4	136.3	129.1	121.9	115.9	108.8	102.6	96.3
52,5°	184.7	177.4	172.1	166.1	159.0	152.1	144.9	137.7	130.8	123.2	115.1	108.6	102.0	94.8	88.1
55,0°	184.9	176.0	169.0	162.2	154.2	148.9	141.4	133.0	124.4	115.2	107.4	99.9	92.7	85.9	80.7
57,5°	179.5	171.9	163.4	155.2	148.9	142.6	135.7	127.1	118.9	110.0	102.6	96.0	87.7	79.7	73.6
60,0°	183.1	170.1	162.7	155.5	145.7	138.2	131.4	121.8	114.0	106.1	99.0	91.1	81.9	74.2	67.6
62,5°	185.8	172.9	164.5	155.1	142.7	132.8	125.2	115.5	106.6	99.3	91.2	82.1	75.1	68.3	60.9
65,0°	179.0	168.8	160.0	148.5	138.8	127.8	120.8	110.3	100.1	91.9	81.9	72.3	64.5	58.6	51.3
67,5°	165.0	155.7	145.1	134.0	125.5	117.0	111.8	102.3	93.0	84.1	72.6	63.4	56.0	46.4	41.4
70,0°	149.9	136.6	120.0	106.2	100.0	95.3	91.0	85.5	81.1	74.0	63.3	56.0	47.9	39.9	35.4
72,5°	123.9	106.0	89.8	78.8	72.2	68.3	66.8	65.5	64.5	61.1	53.0	48.1	38.0	33.0	29.5
75,0°	85.5	76.0	66.6	60.9	58.4	54.4	49.8	47.5	45.7	43.6	38.5	34.2	28.2	27.0	24.0
77,5°	48.5	48.7	46.5	44.6	42.3	38.5	35.1	33.6	31.5	30.7	28.8	25.0	22.5	21.2	19.0
80,0°	24.7	26.2	26.3	25.4	24.5	23.0	21.0	20.5	20.3	19.4	18.3	17.7	17.3	16.3	15.2
82,5°	9.8	10.4	10.4	10.8	11.2	11.4	11.3	11.2	11.2	11.3	11.6	11.6	11.4	11.2	11.0
85,0°	4.8	4.7	4.6	4.4	4.3	4.2	4.2	4.2	4.3	4.3	4.6	4.9	5.2	5.5	5.6
87,5°	2.7	2.5	2.5	2.4	2.4	2.3	2.2	2.1	2.1	2.0	1.9	1.8	1.7	1.6	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_351
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	0.5	0.5
2,5°	339.0	338.7	337.7	336.6	335.7	335.7	335.5	335.9	335.5	335.7	335.2	334.7	334.9	4.2	4.7
5,0°	319.4	318.2	317.0	316.1	315.5	314.7	314.4	314.2	314.0	314.1	314.4	313.3	313.3	8.3	13.1
7,5°	297.5	295.2	294.7	292.5	291.5	290.7	290.0	289.3	288.6	288.9	288.4	288.1	288.6	12.2	25.3
10,0°	276.3	274.4	273.1	271.4	270.5	270.1	269.7	268.8	267.8	268.3	267.4	267.0	266.6	15.9	41.2
12,5°	255.4	253.4	252.0	251.1	249.7	248.5	247.3	246.8	246.3	246.3	246.7	246.8	247.4	19.4	60.6
15,0°	237.2	235.8	233.2	231.1	229.6	228.1	228.3	228.1	226.4	225.6	223.7	222.7	223.2	22.6	83.2
17,5°	219.4	217.0	215.1	213.2	211.5	211.6	211.1	211.3	210.6	210.2	209.3	208.7	208.6	25.6	108.9
20,0°	204.5	202.3	200.4	199.1	198.1	197.5	196.9	196.7	195.9	195.2	194.9	194.9	195.4	28.5	137.4
22,5°	191.9	189.4	186.8	185.5	185.2	184.8	183.7	182.5	182.5	182.6	181.7	180.8	180.9	31.1	168.5
25,0°	179.8	178.0	177.1	175.9	173.6	172.3	171.8	172.0	171.4	170.6	170.5	170.8	171.0	33.4	201.9
27,5°	170.3	168.3	165.8	163.0	161.9	160.9	160.5	160.0	159.4	158.8	159.2	159.0	158.2	35.3	237.3
30,0°	160.1	157.8	155.3	153.8	152.1	150.9	150.3	149.6	148.8	148.2	147.9	148.0	148.2	37.0	274.3
32,5°	150.3	147.9	145.7	143.7	141.6	139.8	138.9	138.3	137.0	136.7	136.2	135.8	135.9	38.3	312.6
35,0°	140.5	137.3	134.8	133.0	130.4	127.8	126.4	125.5	124.6	123.3	122.9	122.3	122.1	39.3	351.9
37,5°	131.2	127.4	124.3	121.1	118.7	116.0	114.7	112.7	111.4	110.7	110.3	109.6	109.2	39.9	391.8
40,0°	122.0	118.4	114.9	110.6	107.7	104.9	102.0	100.4	99.0	98.1	96.6	96.0	95.9	40.3	432.1
42,5°	113.8	109.5	105.1	101.1	98.0	93.9	91.7	89.0	87.4	86.0	84.1	83.6	83.5	40.3	472.3
45,0°	106.5	101.6	96.4	92.1	87.8	84.4	81.2	78.1	75.8	74.0	72.9	72.1	71.6	40.4	512.8
47,5°	98.9	93.4	87.9	83.7	79.1	75.1	71.8	68.9	66.1	64.3	63.0	62.4	62.1	40.4	553.2
50,0°	90.5	84.8	79.7	75.5	70.9	67.0	63.7	59.8	57.4	55.9	54.3	53.6	53.3	40.4	593.5
52,5°	82.4	77.7	72.5	68.1	63.7	59.6	56.0	52.4	50.6	48.7	47.3	47.1	46.4	40.5	634.1
55,0°	75.2	71.1	66.0	60.6	56.2	52.7	49.5	46.4	44.4	43.0	42.0	41.5	41.3	40.5	674.6
57,5°	68.3	63.5	58.2	53.5	49.7	46.3	43.8	41.5	39.6	38.3	37.7	37.2	37.0	41.1	715.7
60,0°	61.9	55.6	50.8	46.8	43.8	41.0	38.9	37.0	35.4	34.3	33.7	33.3	33.2	42.3	758.0
62,5°	52.7	47.9	44.6	41.6	38.4	36.4	34.3	32.8	31.5	30.5	29.9	29.4	29.3	42.6	800.5
65,0°	45.4	41.7	39.1	36.4	34.0	32.4	30.6	29.3	28.3	27.4	26.9	26.6	26.4	41.7	842.2
67,5°	38.1	35.8	33.7	31.6	29.8	28.7	27.4	26.2	25.2	24.5	23.9	23.4	23.3	39.6	881.8
70,0°	32.0	30.3	29.0	27.6	26.3	25.1	24.2	23.2	22.4	21.6	21.0	20.7	20.7	37.3	919.1
72,5°	27.1	25.2	24.2	23.4	22.5	21.7	20.8	20.0	19.2	18.3	18.0	17.5	17.6	32.6	951.7
75,0°	22.0	20.9	19.9	19.4	18.7	18.1	17.3	16.7	15.9	15.3	14.8	14.5	14.2	24.1	975.8
77,5°	18.0	17.3	16.5	15.7	15.1	14.4	14.1	13.4	12.8	12.2	11.5	11.3	11.2	13.5	989.3
80,0°	14.5	13.7	13.1	12.4	11.8	11.2	10.6	10.0	9.3	8.7	8.4	8.0	7.9	6.3	995.6
82,5°	10.7	10.3	9.9	9.4	8.8	8.2	7.4	6.8	6.2	5.8	5.5	5.2	5.2	2.5	998.2
85,0°	5.7	5.7	5.6	5.5	5.3	4.8	4.4	3.9	3.5	3.1	2.8	2.1	2.5	1.3	999.4
87,5°	1.4	1.3	1.3	1.3	1.3	1.4	1.3	1.2	1.1	0.9	0.6	0.5	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08HE EAN: 4069025225443	LP number 59339_351
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	6780	63.6	67.2	65.4
95	241	252	6433	59.6	62.8	61.2
90	229	250	6113	55.9	58.9	57.4
85	216	248	5766	52.0	54.8	53.4
80	203	246	5419	48.3	50.9	49.6
75	190	243	5072	44.8	47.1	46.0
70	178	241	4751	41.6	43.8	42.7
65	165	238	4404	38.2	40.1	39.2
60	152	235	4057	34.9	36.7	35.8
55	140	232	3737	32.0	33.6	32.8
50	127	229	3390	28.9	30.3	29.6
45	114	225	3043	25.9	27.1	26.5
40	102	221	2723	23.2	24.3	23.8
35	89	216	2376	20.4	21.3	20.8
30	76	210	2029	17.6	18.4	18.0
25	63	203	1682	15.0	15.6	15.3
20	51	195	1361	12.6	13.1	12.8
15	38	184	1014	10.1	10.5	10.3
10	25	169	667	7.6	7.9	7.8
9	22	164	587	6.9	7.2	7.0