

Photometric test report

Family

Round 21 S



Order number: 51MR34FD0321W

EAN: 4058352829769

LP number

59509_25

Version

surface-mounted and suspended luminaire, cover, opal, PMMA, extremely wide distribution, direct distribution, aluminium housing, white

Lamps

LED 3000 K | CRI ≥ 80

Controlgear

ECG-DALI


Rated values

Net luminous flux = 3750 lm
Power consumption = 30.3 W
Luminous efficacy = 123.8 lm/W

serial documentation

31.07.2024

siteco

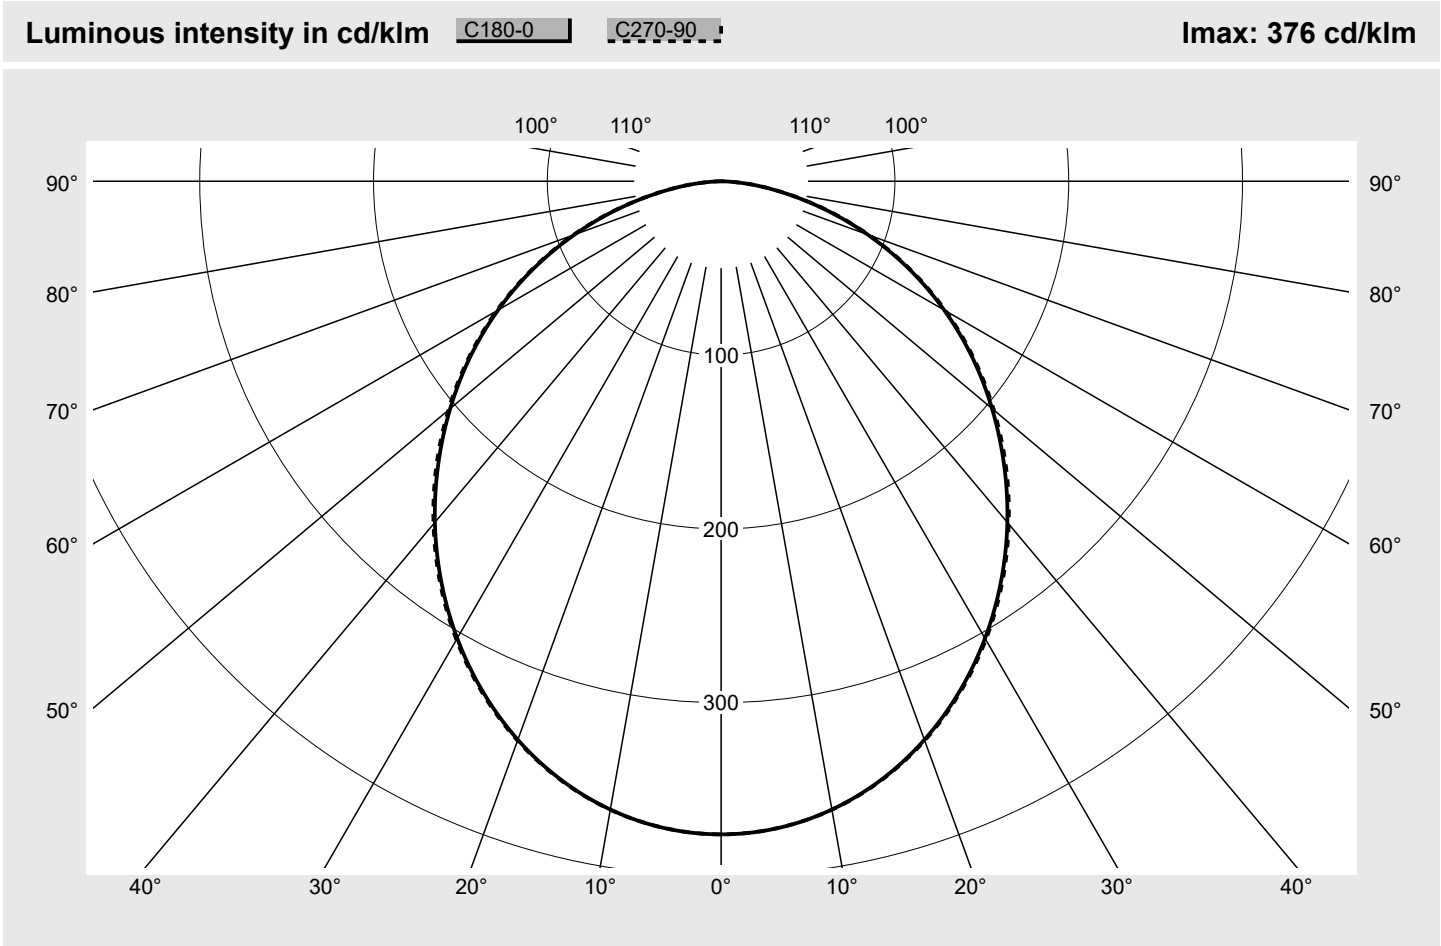

Classifications		Luminaire light output ratios	
DIN 5040	A 4 0	η_{LB}	100.0%
CIE	N1=49 N2=80 N3=96	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Round 21 S	Order number: 51MR34FD0321W EAN: 4058352829769	LP number 59509_25
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	375.8	375.8	375.8	375.8	375.8	375.8	375.8	2.2	2.2
5°	373.6	373.6	373.6	373.6	373.7	373.6	373.6	17.8	20.1
10°	367.1	367.0	367.1	367.1	367.2	367.1	367.2	34.9	55.0
15°	356.4	356.5	356.5	356.7	356.7	356.7	356.7	50.6	105.6
20°	342.0	342.1	342.1	342.4	342.4	342.5	342.5	64.2	169.8
25°	324.2	324.6	324.4	324.9	324.8	325.3	324.9	75.2	245.0
30°	303.7	304.3	303.9	304.6	304.5	305.2	304.6	83.4	328.5
35°	280.8	281.7	281.1	282.4	281.8	282.9	282.0	88.6	417.1
40°	256.2	257.4	256.5	258.0	257.2	258.5	257.4	90.7	507.8
45°	230.2	231.7	230.5	232.2	231.4	232.8	231.7	89.8	597.5
50°	203.5	204.9	203.8	205.4	204.7	206.0	204.9	86.0	683.6
55°	176.3	177.6	175.5	178.1	177.3	178.7	177.4	79.6	763.2
60°	148.1	149.5	147.4	150.0	149.0	150.6	149.2	70.8	834.0
65°	119.2	120.8	118.4	121.2	120.0	121.6	120.1	59.7	893.7
70°	89.7	91.5	88.8	91.9	90.4	92.3	90.6	46.8	940.5
75°	60.9	62.5	60.0	63.4	61.5	63.0	61.6	32.8	973.3
80°	34.5	35.9	33.5	36.8	35.0	36.0	35.0	19.1	992.4
85°	13.2	14.6	12.4	14.8	13.6	14.5	13.7	7.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Round 21 S			Order number: 51MR34FD0321W EAN: 4058352829769							LP number 59509_25	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.2	21.9	20.6	22.2	22.5	20.2	21.9	20.6	22.2	22.5
	3H	21.8	23.3	22.1	23.6	24.0	21.8	23.3	22.2	23.7	24.0
	4H	22.4	23.8	22.8	24.1	24.5	22.4	23.8	22.8	24.2	24.6
	6H	22.8	24.1	23.2	24.5	24.8	22.8	24.1	23.2	24.5	24.9
	8H	22.9	24.2	23.4	24.5	24.9	23.0	24.2	23.4	24.6	25.0
	12H	23.0	24.2	23.4	24.6	25.0	23.1	24.2	23.5	24.6	25.0
4H	2H	20.9	22.4	21.3	22.7	23.1	21.0	22.4	21.4	22.8	23.1
	3H	22.7	23.9	23.1	24.3	24.7	22.7	23.9	23.1	24.3	24.7
	4H	23.4	24.5	23.8	24.9	25.3	23.4	24.5	23.9	24.9	25.4
	6H	23.9	24.9	24.4	25.3	25.7	24.0	24.9	24.4	25.3	25.8
	8H	24.1	25.0	24.6	25.4	25.9	24.1	25.0	24.6	25.5	25.9
	12H	24.2	25.0	24.7	25.4	25.9	24.3	25.0	24.8	25.5	26.0
8H	4H	23.7	24.6	24.2	25.0	25.5	23.8	24.6	24.2	25.1	25.5
	6H	24.3	25.0	24.8	25.5	26.0	24.4	25.1	24.9	25.6	26.1
	8H	24.6	25.2	25.0	25.7	26.2	24.6	25.3	25.1	25.7	26.3
	12H	24.7	25.3	25.2	25.8	26.3	24.8	25.3	25.3	25.8	26.4
12H	4H	23.7	24.5	24.2	25.0	25.5	23.8	24.6	24.3	25.0	25.5
	6H	24.4	25.0	24.9	25.5	26.0	24.5	25.1	25.0	25.6	26.1
	8H	24.7	25.2	25.2	25.7	26.2	24.7	25.3	25.2	25.8	26.3

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 390	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	10218.9	10288.0	10234.0	10308.0	10272.2	10333.6	10286.4
50°	9937.6	10008.3	9953.7	10031.4	9994.9	10061.9	10004.4
55°	9647.8	9721.1	9607.0	9747.7	9701.2	9779.6	9710.8
60°	9300.0	9388.5	9251.3	9419.4	9355.3	9454.0	9366.3
65°	8853.6	8969.8	8791.0	8999.3	8910.2	9032.4	8922.4
70°	8235.3	8402.3	8153.2	8433.5	8298.9	8468.0	8312.5
75°	7392.1	7582.8	7279.2	7694.8	7463.8	7642.9	7473.5
80°	6236.1	6481.4	6057.8	6652.9	6318.5	6508.5	6333.0
85°	4760.8	5262.2	4470.5	5321.6	4904.9	5238.8	4937.3

Photometric test report

Family
Round 21 S

Order number: 51MR34FD0321W
EAN: 4058352829769

LP number
59509_25

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

