


Photometric test report

Family Round 21 S	Order number: 51MR34ND0321W EAN: 4058352829806	LP number 59654_19
	Version	Suspended luminaire, micro prismatic cover, PMMA, wide distribution, direct-/ indirect distribution, aluminium housing, white, UGR≤16 (L65≤3000cd/m²)
	Lamps	LED 3000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 3660 lm Power consumption = 28.3 W Luminous efficacy = 129.3 lm/W
		serial documentation 31.07.2024
		siteco

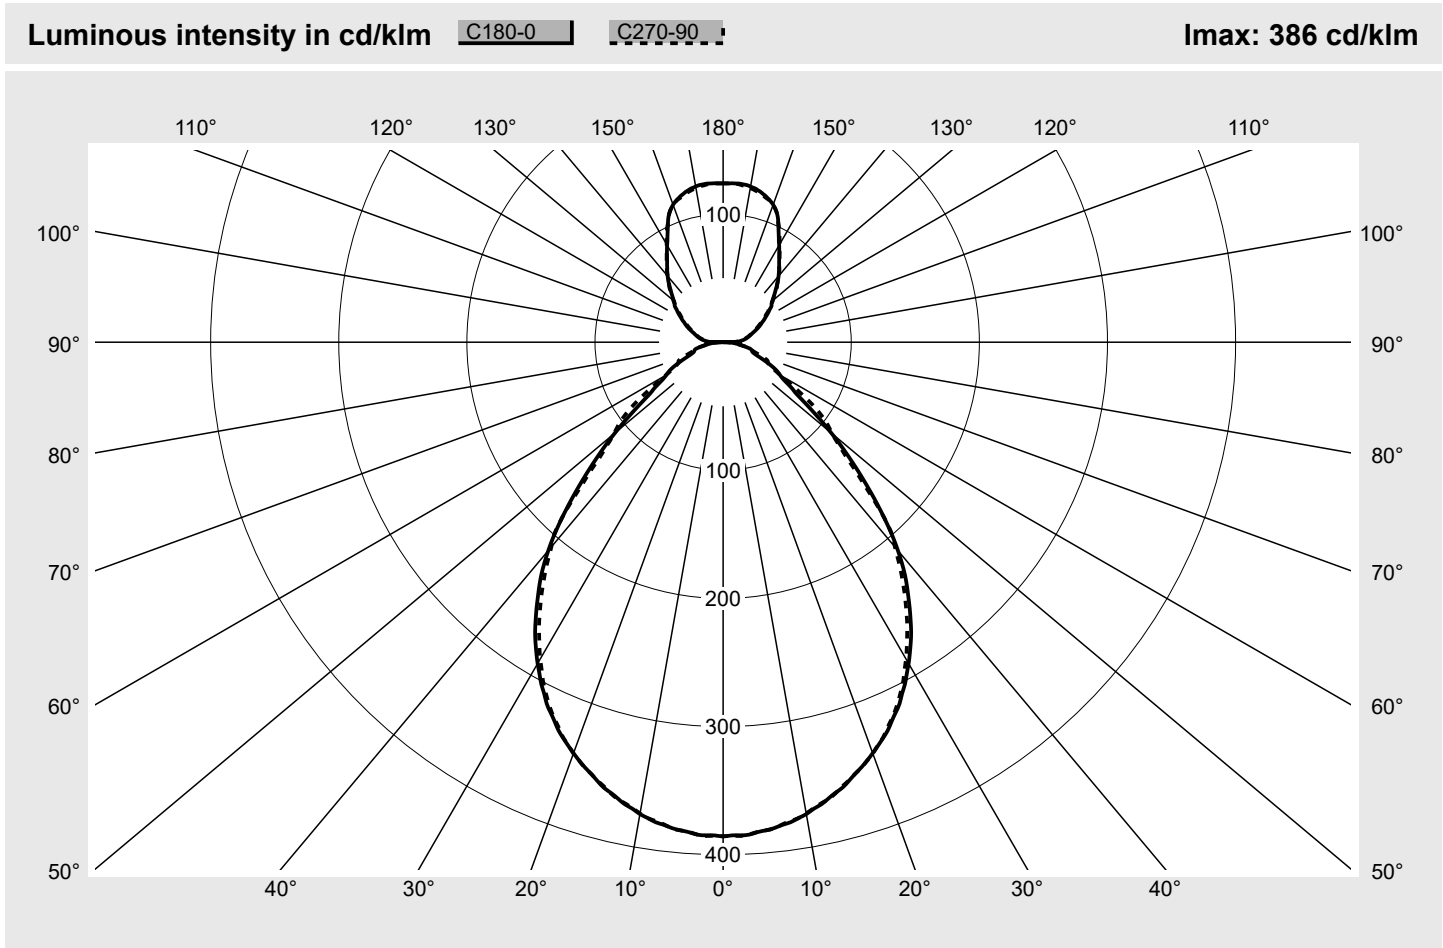

Classifications		Luminaire light output ratios	
DIN 5040	B 5 3	η_{LB}	100.0%
CIE	N1=66 N2=90 N3=98	ϕ_u	70.6%
	N4=71 N5=100	ϕ_o	29.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Round 21 S	Order number: 51MR34ND0321W EAN: 4058352829806	LP number 59654_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	385.7	385.7	385.7	385.7	385.7	385.7	385.7	0.1	0.1
1°	385.0	385.3	384.9	385.7	385.2	385.8	385.3	0.7	0.8
2°	385.1	385.3	384.7	384.8	385.1	385.3	385.6	1.5	2.3
3°	384.9	384.4	384.2	384.6	384.4	384.5	384.8	2.2	4.5
4°	383.3	383.8	383.7	384.1	383.1	383.9	383.2	2.9	7.4
5°	382.4	382.7	382.8	382.6	382.2	382.5	382.5	3.7	11.1
6°	381.3	381.9	381.4	381.6	380.9	381.5	381.5	4.4	15.5
7°	379.5	380.2	379.8	379.8	379.7	379.9	379.2	5.1	20.5
8°	378.3	378.8	378.4	378.5	378.1	378.8	377.4	5.8	26.3
9°	376.0	376.7	376.0	376.5	375.3	376.7	376.1	6.5	32.8
10°	374.0	374.7	374.1	374.6	373.4	374.4	373.5	7.1	39.9
11°	370.9	372.5	371.7	371.8	370.7	372.2	370.5	7.8	47.7
12°	368.8	369.8	369.0	369.7	368.0	369.4	368.0	8.4	56.1
13°	365.5	367.3	366.0	367.1	365.3	366.8	365.9	9.0	65.1
14°	362.4	364.6	363.2	364.3	362.6	363.9	362.8	9.6	74.8
15°	359.9	361.6	359.9	361.1	359.0	361.0	359.0	10.2	85.0
16°	356.2	358.0	357.0	358.2	356.0	357.8	355.9	10.8	95.8
17°	352.3	355.1	353.8	354.9	352.3	354.3	352.2	11.3	107.1
18°	349.0	351.4	350.0	351.4	348.4	351.0	349.2	11.9	119.0
19°	345.3	348.0	346.4	347.3	344.6	347.0	345.3	12.4	131.4
20°	341.4	343.9	342.3	343.5	340.9	343.5	341.6	12.8	144.2
21°	337.3	340.1	338.4	339.6	336.3	339.0	336.9	13.3	157.5
22°	333.2	335.4	334.1	335.3	332.0	334.2	333.0	13.7	171.2
23°	329.0	331.3	329.5	330.6	327.6	329.9	327.5	14.1	185.4
24°	323.7	326.6	324.4	325.8	322.7	325.1	322.7	14.5	199.8
25°	318.8	321.6	318.9	320.4	317.7	320.1	317.5	14.8	214.7
26°	314.0	316.3	313.5	315.2	312.3	314.2	311.8	15.1	229.8
27°	307.7	310.6	307.6	309.1	306.4	309.0	305.7	15.3	245.1
28°	302.3	304.3	301.4	303.5	300.7	302.6	299.5	15.6	260.7
29°	295.7	298.2	294.8	297.4	294.6	296.4	292.2	15.7	276.4
30°	289.6	291.6	288.0	291.0	288.0	290.1	285.5	15.9	292.3
31°	283.0	285.0	280.5	284.0	282.5	282.8	278.3	16.0	308.2
32°	276.4	277.8	273.8	277.0	275.9	276.1	271.0	16.0	324.2
33°	269.5	270.8	266.2	269.7	269.4	268.6	263.9	16.0	340.3
34°	261.7	263.3	258.9	262.4	262.3	261.6	256.1	16.0	356.3
35°	254.0	256.0	251.6	254.8	255.0	253.9	248.4	16.0	372.3
36°	246.1	248.3	243.8	246.8	247.4	245.8	240.7	15.9	388.1
37°	238.4	240.3	235.8	238.8	239.8	237.6	232.6	15.7	403.8
38°	230.5	231.7	227.8	230.2	232.0	229.0	224.9	15.5	419.3
39°	221.7	222.5	219.5	221.2	223.7	219.6	216.5	15.2	434.6
40°	212.3	213.0	210.1	211.6	215.3	209.7	208.6	14.9	449.5
41°	202.4	202.4	199.7	201.7	206.4	199.2	202.2	14.5	464.0
42°	191.8	191.6	189.6	191.5	196.4	188.5	192.6	14.1	478.1
43°	180.9	180.6	181.0	181.0	186.6	177.8	180.0	13.6	491.6
44°	170.1	169.6	168.4	170.7	176.2	167.8	166.2	13.0	504.6

Photometric test report

Family Round 21 S	Order number: 51MR34ND0321W EAN: 4058352829806	LP number 59654_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
45°	159.3	159.0	156.5	160.3	165.7	157.7	153.3	12.3	516.9
46°	149.0	148.8	145.8	149.4	158.7	147.8	142.7	11.8	528.7
47°	138.9	139.0	133.8	139.0	148.2	138.5	131.6	11.1	539.9
48°	129.2	130.0	125.0	129.2	138.7	129.5	124.1	10.6	550.5
49°	119.9	121.5	117.7	119.6	127.6	121.1	116.8	10.0	560.5
50°	110.2	113.4	111.2	111.0	117.5	113.1	111.4	9.5	569.9
51°	101.0	105.5	106.0	103.0	107.2	105.3	106.9	9.0	578.9
52°	91.7	97.9	100.6	95.4	97.0	97.9	102.7	8.4	587.3
53°	83.1	90.7	95.5	88.4	87.5	90.7	97.6	7.9	595.3
54°	75.5	83.7	90.1	81.4	78.7	83.6	91.8	7.4	602.7
55°	69.0	77.3	84.2	75.2	71.0	77.2	85.3	6.9	609.6
56°	65.5	71.4	77.9	69.2	64.6	71.3	77.7	6.5	616.1
57°	61.0	65.7	71.6	64.1	59.3	65.8	70.3	6.0	622.1
58°	56.6	60.6	65.3	59.7	55.1	60.9	63.3	5.6	627.7
59°	53.4	55.8	59.2	55.9	52.0	56.5	57.2	5.2	632.9
60°	51.3	51.4	53.7	52.3	49.7	52.2	52.0	4.9	637.8
61°	49.4	47.8	49.0	49.2	48.0	48.7	47.9	4.7	642.5
62°	47.4	44.7	45.1	46.5	46.4	45.8	44.5	4.4	646.9
63°	44.8	42.2	42.4	43.9	44.6	43.2	42.0	4.2	651.2
64°	41.9	39.9	40.4	41.1	42.1	40.4	40.1	4.0	655.2
65°	38.6	37.9	39.2	38.3	39.2	37.6	38.7	3.8	659.0
66°	35.6	35.8	38.2	35.5	36.0	34.8	38.2	3.6	662.6
67°	32.6	33.8	37.2	32.9	33.2	32.4	37.8	3.4	666.1
68°	29.9	31.9	35.5	30.6	30.7	30.2	36.7	3.3	669.3
69°	27.6	30.0	33.5	28.7	28.6	28.6	34.5	3.1	672.4
70°	25.9	28.4	31.1	27.6	26.9	27.4	31.9	2.9	675.3
71°	24.7	26.9	28.8	26.9	25.4	26.4	29.3	2.8	678.1
72°	23.9	25.4	26.8	26.0	24.1	25.5	27.0	2.7	680.8
73°	23.6	24.0	25.2	24.7	23.2	24.3	25.2	2.5	683.3
74°	23.3	22.8	24.1	23.1	22.7	23.0	23.8	2.4	685.8
75°	22.8	21.7	23.0	21.5	22.4	21.5	22.7	2.3	688.1
76°	22.2	20.4	21.8	20.1	21.8	20.1	21.7	2.2	690.4
77°	20.7	19.2	20.5	18.8	20.5	18.7	20.4	2.1	692.5
78°	18.8	17.9	18.9	17.5	18.8	17.4	19.0	2.0	694.4
79°	16.7	16.4	17.2	16.1	16.9	16.0	17.4	1.8	696.2
80°	14.7	14.9	15.4	14.5	15.2	14.7	15.7	1.6	697.8
81°	13.5	13.4	13.8	13.1	13.7	13.1	13.9	1.5	699.3
82°	12.3	11.8	12.3	11.8	12.4	11.7	12.2	1.3	700.6
83°	11.3	10.5	10.9	10.4	11.1	10.4	10.6	1.2	701.8
84°	10.0	9.2	9.5	9.1	9.7	9.1	9.3	1.0	702.8
85°	8.7	7.8	8.3	7.7	8.3	7.7	8.0	0.9	703.7
86°	7.4	6.2	6.9	6.3	7.0	6.2	6.6	0.7	704.4
87°	6.2	4.8	5.5	4.8	5.5	4.7	5.3	0.6	705.0
88°	4.2	3.4	4.0	3.5	4.0	3.5	3.9	0.4	705.4
89°	2.6	2.5	2.6	2.7	2.5	2.7	2.5	0.3	705.7

Photometric test report

Family Round 21 S	Order number: 51MR34ND0321W EAN: 4058352829806	LP number 59654_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm		
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	705.7
91°	9.7	8.6	9.0	8.2	8.4	8.0	8.2	0.9	706.6
92°	11.4	10.0	10.8	9.6	10.3	9.2	10.0	1.1	707.7
93°	12.4	11.5	11.9	11.1	11.5	11.0	11.2	1.3	709.0
94°	13.6	12.8	12.8	12.5	12.8	12.3	12.4	1.4	710.3
95°	14.4	13.7	14.1	13.3	13.9	13.4	13.5	1.5	711.8
96°	15.6	15.1	15.2	14.4	15.2	14.6	14.3	1.6	713.5
97°	16.5	16.1	16.2	15.7	16.1	15.7	15.2	1.7	715.2
98°	17.1	16.8	16.8	16.6	17.0	16.6	16.1	1.8	717.0
99°	18.1	17.8	17.9	17.6	17.7	17.3	17.2	1.9	718.9
100°	18.6	18.7	18.5	18.2	18.5	18.3	18.1	2.0	720.9
101°	19.5	19.2	19.5	19.1	19.2	19.3	19.1	2.1	723.0
102°	20.2	20.0	20.1	19.6	20.1	20.1	19.6	2.1	725.1
103°	20.9	20.8	20.8	20.4	20.9	20.8	20.5	2.2	727.4
104°	21.5	21.5	21.7	21.3	21.6	21.6	20.9	2.3	729.6
105°	22.4	22.3	22.3	22.1	22.4	22.2	21.8	2.4	732.0
106°	23.1	22.7	23.0	23.0	23.1	22.9	22.5	2.4	734.4
107°	23.8	23.6	23.8	23.7	23.9	23.8	23.4	2.5	736.9
108°	24.8	24.5	24.7	24.6	24.7	24.8	24.0	2.6	739.5
109°	25.8	25.4	25.4	25.3	25.8	25.6	24.8	2.6	742.1
110°	26.9	26.4	26.4	26.2	26.6	26.7	26.1	2.7	744.8
111°	27.9	27.2	27.6	27.1	27.6	27.6	26.8	2.8	747.6
112°	29.1	28.5	28.5	28.0	28.4	28.5	27.8	2.9	750.5
113°	30.1	29.5	29.5	28.9	29.4	29.3	28.8	3.0	753.5
114°	31.3	30.4	30.4	29.9	30.5	30.4	29.8	3.0	756.5
115°	32.2	31.4	31.5	31.2	31.6	31.4	30.8	3.1	759.6
116°	33.2	32.2	32.5	32.2	32.7	32.6	31.8	3.2	762.8
117°	34.1	33.3	33.6	33.4	33.7	33.6	33.2	3.3	766.1
118°	35.6	34.5	34.9	34.4	34.9	34.8	34.3	3.4	769.5
119°	36.7	35.6	36.1	35.8	36.2	35.8	35.4	3.4	772.9
120°	37.8	36.8	37.1	36.8	37.1	37.1	36.7	3.5	776.5
121°	39.1	38.0	38.4	38.2	38.4	38.2	38.0	3.6	780.0
122°	40.4	39.2	39.7	39.3	39.8	39.3	39.1	3.7	783.7
123°	41.7	40.6	41.0	40.6	41.0	40.4	40.3	3.7	787.5
124°	43.0	41.9	42.2	41.8	42.6	41.8	42.2	3.8	791.3
125°	44.2	43.2	43.5	43.2	44.1	43.2	43.1	3.9	795.2
126°	46.0	44.6	44.9	44.6	45.6	44.4	44.5	4.0	799.2
127°	47.3	45.9	46.3	45.9	47.1	45.9	46.0	4.1	803.2
128°	47.9	47.5	47.5	47.6	48.8	47.4	47.7	4.1	807.4
129°	48.8	49.0	49.0	48.9	50.2	48.9	49.2	4.2	811.6
130°	50.0	50.4	50.2	50.7	51.6	50.4	50.7	4.3	815.8
131°	51.7	52.2	51.6	52.1	52.9	52.1	52.0	4.3	820.1
132°	53.2	53.8	53.2	53.9	54.2	53.7	53.6	4.4	824.5
133°	54.7	55.5	55.1	55.7	55.7	55.4	55.1	4.4	828.9
134°	56.4	57.2	56.6	57.2	57.3	57.0	56.7	4.5	833.4

Photometric test report

Family Round 21 S	Order number: 51MR34ND0321W EAN: 4058352829806	LP number 59654_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
135°	58.1	59.0	58.1	59.0	58.8	58.8	58.9	4.6	838.0
136°	60.0	60.6	59.8	60.8	60.2	60.5	60.5	4.6	842.6
137°	61.7	62.4	61.5	62.5	61.7	62.2	62.0	4.6	847.2
138°	63.9	64.1	63.4	64.4	63.3	64.1	63.7	4.7	851.9
139°	65.6	66.0	65.1	66.2	65.2	65.9	65.6	4.7	856.6
140°	67.4	67.8	66.9	68.2	67.2	67.8	67.5	4.8	861.4
141°	69.0	69.7	68.8	69.8	69.0	69.8	69.4	4.8	866.2
142°	70.9	71.8	70.6	71.9	70.7	71.7	71.4	4.8	871.0
143°	72.5	73.6	72.5	74.0	72.7	73.7	72.9	4.8	875.8
144°	74.4	75.7	74.5	76.0	74.5	75.8	74.8	4.8	880.7
145°	76.2	77.6	76.3	78.2	76.8	78.0	76.8	4.9	885.5
146°	78.3	79.7	78.5	80.1	78.9	80.2	78.8	4.9	890.4
147°	80.4	82.0	80.5	82.5	81.1	82.5	80.9	4.9	895.3
148°	82.7	84.2	82.8	84.8	83.6	84.8	83.3	4.9	900.2
149°	85.1	86.7	85.2	87.2	85.7	87.3	85.6	4.9	905.0
150°	87.5	89.2	87.7	89.8	88.1	89.7	88.1	4.9	909.9
151°	89.8	91.9	90.6	92.6	91.1	92.5	91.0	4.9	914.8
152°	92.6	94.4	93.3	95.4	93.9	95.3	93.8	4.9	919.6
153°	95.5	97.4	96.2	98.4	96.9	98.1	96.9	4.8	924.4
154°	98.6	100.4	99.2	101.1	99.6	101.0	99.6	4.8	929.3
155°	101.9	103.2	102.4	104.0	102.8	103.6	102.1	4.8	934.0
156°	105.4	105.7	105.2	106.2	105.4	106.3	105.0	4.7	938.7
157°	108.2	108.5	107.6	108.7	108.1	108.7	108.1	4.6	943.4
158°	110.5	110.6	110.1	111.0	110.3	110.6	110.5	4.5	947.9
159°	112.4	112.7	112.1	112.7	112.1	112.4	112.4	4.4	952.3
160°	114.2	114.4	113.8	114.0	113.9	113.9	114.1	4.3	956.6
161°	115.6	116.0	115.6	115.8	115.3	115.4	115.3	4.1	960.7
162°	116.8	117.3	116.7	117.1	116.4	116.6	116.5	4.0	964.7
163°	117.9	118.3	118.0	117.8	117.7	117.6	117.2	3.8	968.5
164°	119.0	119.2	118.9	119.0	118.6	118.4	118.0	3.6	972.1
165°	119.9	120.2	120.0	120.0	119.3	119.5	119.0	3.4	975.5
166°	120.9	121.1	120.7	120.8	120.3	120.2	119.8	3.2	978.7
167°	121.6	121.7	121.5	121.4	121.2	120.8	120.4	3.0	981.7
168°	122.4	122.3	122.1	122.1	121.7	121.4	121.0	2.8	984.4
169°	122.9	123.0	122.6	122.6	122.3	122.0	121.7	2.6	987.0
170°	123.4	123.3	122.9	123.1	122.8	122.4	122.1	2.3	989.3
171°	123.9	123.7	123.4	123.5	123.2	122.8	122.5	2.1	991.5
172°	124.1	124.1	123.5	123.9	123.4	123.1	123.1	1.9	993.3
173°	124.2	124.2	123.8	123.9	123.7	123.1	123.3	1.7	995.0
174°	124.4	124.2	123.9	124.3	124.0	123.3	123.8	1.4	996.4
175°	124.3	124.3	124.2	124.2	124.2	123.4	124.0	1.2	997.6
176°	124.2	124.3	124.1	124.1	124.2	123.4	124.0	0.9	998.5
177°	124.2	124.1	124.1	123.8	124.2	123.3	124.1	0.7	999.3
178°	123.9	123.9	124.2	123.9	124.0	123.4	124.1	0.5	999.7
179°	123.9	123.9	124.0	124.1	124.0	123.3	124.0	0.2	1000.0
180°	124.0	124.0	124.0	124.0	124.0	124.0	124.0	0.0	1000.0

Photometric test report

Family Round 21 S			Order number: 51MR34ND0321W EAN: 4058352829806							LP number 59654_19	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	12.0	13.0	12.7	13.8	14.6	12.0	13.0	12.7	13.8	14.6
	3H	12.4	13.3	13.2	14.1	15.0	12.4	13.4	13.2	14.2	15.1
	4H	12.8	13.7	13.6	14.4	15.4	12.9	13.7	13.6	14.5	15.4
	6H	13.2	14.0	14.0	14.8	15.7	13.3	14.1	14.0	14.9	15.8
	8H	13.3	14.0	14.1	14.8	15.8	13.3	14.1	14.1	14.9	15.8
	12H	13.5	14.2	14.3	15.0	15.9	13.5	14.2	14.3	15.0	15.9
4H	2H	12.1	13.0	12.9	13.7	14.7	12.1	13.0	12.9	13.8	14.7
	3H	12.9	13.6	13.7	14.4	15.4	12.8	13.6	13.6	14.4	15.4
	4H	13.3	14.0	14.1	14.8	15.8	13.3	14.0	14.1	14.8	15.8
	6H	13.9	14.5	14.7	15.3	16.3	13.9	14.5	14.7	15.3	16.3
	8H	14.0	14.5	14.8	15.3	16.4	14.0	14.5	14.8	15.3	16.4
	12H	14.3	14.7	15.1	15.6	16.6	14.2	14.7	15.1	15.5	16.6
8H	4H	13.4	14.0	14.3	14.8	15.8	13.4	14.0	14.3	14.8	15.8
	6H	14.0	14.5	14.9	15.3	16.4	14.0	14.4	14.9	15.3	16.4
	8H	14.4	14.7	15.2	15.6	16.7	14.4	14.7	15.2	15.6	16.7
	12H	14.8	15.1	15.6	15.9	17.0	14.7	15.0	15.6	15.9	17.0
12H	4H	13.6	14.0	14.4	14.8	15.9	13.6	14.0	14.4	14.8	15.9
	6H	14.2	14.6	15.1	15.5	16.5	14.2	14.6	15.1	15.4	16.5
	8H	14.6	14.9	15.4	15.7	16.8	14.6	14.9	15.4	15.7	16.8

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 590	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	3016.7	3010.1	2962.1	3035.4	3136.8	2985.4	2903.2
50°	2294.6	2361.9	2316.9	2311.2	2446.7	2355.6	2319.8
55°	1611.4	1804.5	1965.2	1755.2	1656.2	1802.2	1989.7
60°	1373.3	1377.3	1437.8	1401.1	1330.9	1398.4	1390.9
65°	1224.1	1199.0	1240.6	1214.5	1240.2	1190.5	1225.0
70°	1014.0	1110.7	1218.4	1082.1	1051.2	1071.5	1247.4
75°	1181.0	1122.6	1188.3	1113.8	1160.3	1114.3	1172.7
80°	1134.7	1148.6	1189.5	1120.9	1175.6	1130.9	1208.7
85°	1340.2	1191.2	1268.0	1188.1	1275.6	1175.8	1225.0

Photometric test report

Family Round 21 S	Order number: 51MR34ND0321W EAN: 4058352829806	LP number 59654_19
Luminance values in cd/m²		serial
γ 65° γ 70° γ 75° γ 80° γ 85°		

