

Photometric test report

Family
Batten 41

Order number: 51LP327KM20AN
EAN: 4058352705070

LP number
59484_7



Version diffuser optic, frosted, polycarbonate, adjustable color temperature: 3000K | 4000K | 5000K, extremely wide distribution

Lamps LED 5000 K | CRI ≥ 80

Controlgear ECG


Setting individual position: colour temperature 5000K

Rated values Net luminous flux = 2000 lm
Power consumption = 16.0 W
Luminous efficacy = 125 lm/W

serial documentation
26.08.2024



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 230 cd/klm**

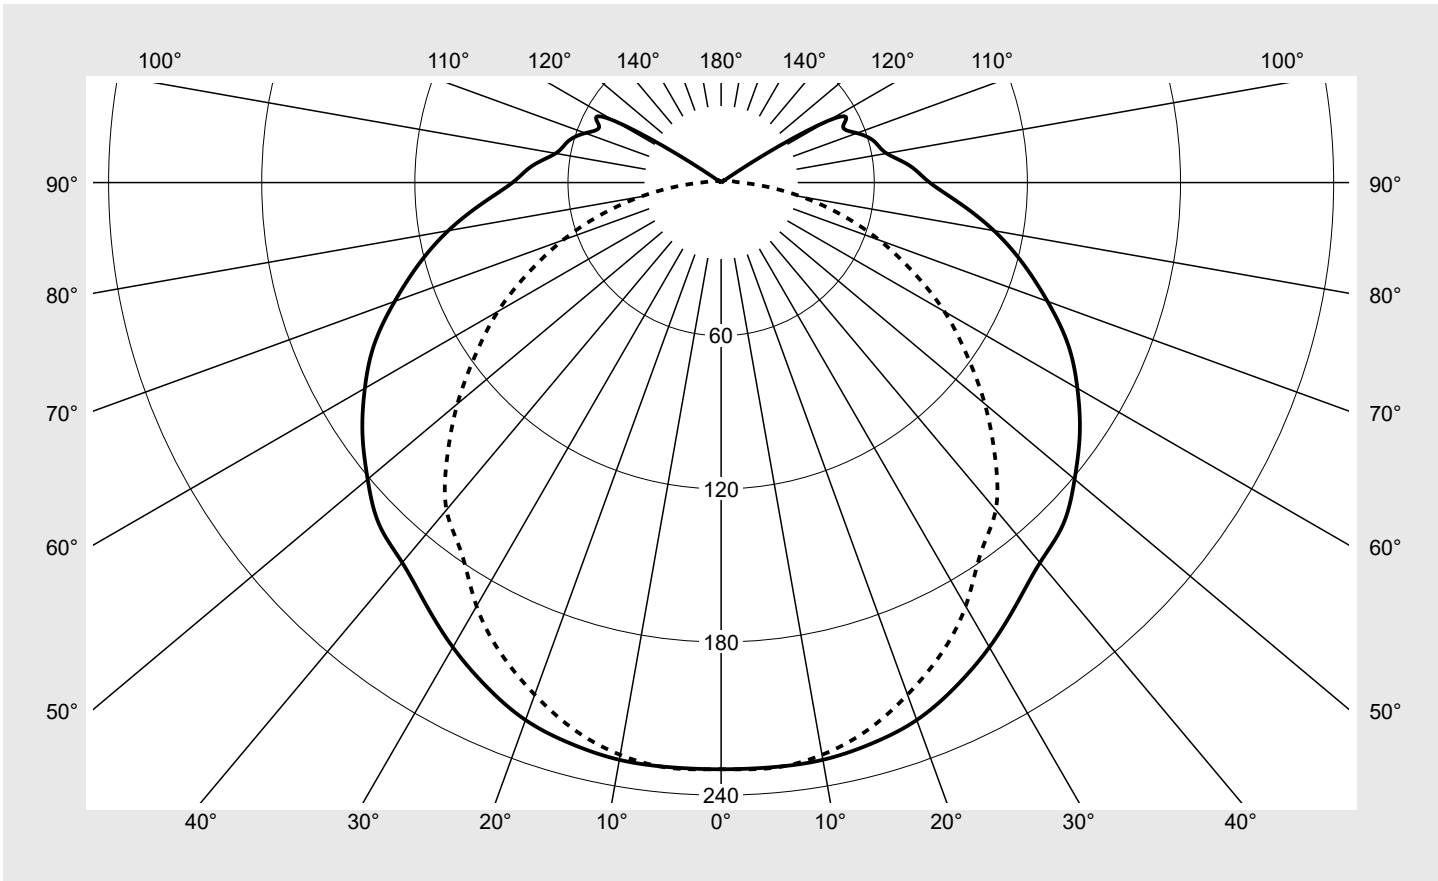

Classifications	
DIN 5040	B 3 1
CIE	N1=37 N2=66 N3=87 N4=87 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	86.8%
ϕ_o	13.2%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Batten 41	Order number: 51LP327KM20AN EAN: 4058352705070	LP number 59484_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9
5°	229.9	229.9	229.8	229.6	229.4	229.8	230.2	229.8	229.4	229.6	229.8	229.9	229.9
10°	229.7	229.0	228.3	227.9	227.4	227.5	227.7	227.5	227.4	227.9	228.3	229.0	229.7
15°	227.6	227.6	227.7	225.6	223.6	222.8	222.0	222.8	223.6	225.6	227.7	227.6	227.6
20°	224.1	223.7	223.2	219.8	216.4	214.9	213.5	214.9	216.4	219.8	223.2	223.7	224.1
25°	217.8	217.7	217.6	213.6	209.6	206.7	203.8	206.7	209.6	213.6	217.6	217.7	217.8
30°	210.2	209.6	209.0	204.6	200.1	195.9	191.6	195.9	200.1	204.6	209.0	209.6	210.2
35°	201.7	201.5	201.4	197.3	193.2	185.2	177.3	185.2	193.2	197.3	201.4	201.5	201.7
40°	194.4	193.3	192.2	186.6	181.1	174.2	167.4	174.2	181.1	186.6	192.2	193.3	194.4
45°	189.5	186.3	183.2	175.8	168.3	160.1	151.8	160.1	168.3	175.8	183.2	186.3	189.5
50°	180.8	176.0	171.3	163.0	154.7	144.8	134.9	144.8	154.7	163.0	171.3	176.0	180.8
55°	171.6	169.3	167.0	153.6	140.2	128.8	117.4	128.8	140.2	153.6	167.0	169.3	171.6
60°	161.2	158.5	155.9	141.2	126.5	113.7	101.0	113.7	126.5	141.2	155.9	158.5	161.2
65°	150.0	146.9	143.9	127.9	111.9	97.5	83.1	97.5	111.9	127.9	143.9	146.9	150.0
70°	136.1	133.4	130.6	113.2	95.8	80.9	66.0	80.9	95.8	113.2	130.6	133.4	136.1
75°	122.4	119.6	116.9	98.8	80.7	64.7	48.8	64.7	80.7	98.8	116.9	119.6	122.4
80°	108.6	105.2	101.9	83.8	65.8	49.0	32.1	49.0	65.8	83.8	101.9	105.2	108.6
85°	94.0	91.1	88.1	70.0	51.8	34.6	17.5	34.6	51.8	70.0	88.1	91.1	94.0
90°	81.7	79.1	76.5	59.1	41.8	24.8	7.9	24.8	41.8	59.1	76.5	79.1	81.7
95°	74.4	70.8	67.2	52.2	37.2	21.1	4.9	21.1	37.2	52.2	67.2	70.8	74.4
100°	65.8	61.9	57.9	42.8	27.7	15.7	3.6	15.7	27.7	42.8	57.9	61.9	65.8
105°	62.2	58.3	54.5	40.5	26.6	14.5	2.4	14.5	26.6	40.5	54.5	58.3	62.2
110°	56.6	53.8	51.1	39.2	27.4	14.5	1.6	14.5	27.4	39.2	51.1	53.8	56.6
115°	52.8	50.1	47.3	36.0	24.7	13.2	1.6	13.2	24.7	36.0	47.3	50.1	52.8
120°	48.4	46.4	44.3	33.2	22.1	11.8	1.6	11.8	22.1	33.2	44.3	46.4	48.4
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Batten 41	Order number: 51LP327KM20AN EAN: 4058352705070	LP number 59484_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	229.9	1.4	1.4
5°	229.9	229.8	229.6	229.4	229.8	230.2	229.8	229.4	229.6	229.8	229.9	11.0	12.4
10°	229.0	228.3	227.9	227.4	227.5	227.7	227.5	227.4	227.9	228.3	229.0	21.7	34.1
15°	227.6	227.7	225.6	223.6	222.8	222.0	222.8	223.6	225.6	227.7	227.6	32.0	66.0
20°	223.7	223.2	219.8	216.4	214.9	213.5	214.9	216.4	219.8	223.2	223.7	41.1	107.2
25°	217.7	217.6	213.6	209.6	206.7	203.8	206.7	209.6	213.6	217.6	217.7	49.3	156.4
30°	209.6	209.0	204.6	200.1	195.9	191.6	195.9	200.1	204.6	209.0	209.6	55.7	212.2
35°	201.5	201.4	197.3	193.2	185.2	177.3	185.2	193.2	197.3	201.4	201.5	61.2	273.4
40°	193.3	192.2	186.6	181.1	174.2	167.4	174.2	181.1	186.6	192.2	193.3	65.1	338.5
45°	186.3	183.2	175.8	168.3	160.1	151.8	160.1	168.3	175.8	183.2	186.3	67.5	405.9
50°	176.0	171.3	163.0	154.7	144.8	134.9	144.8	154.7	163.0	171.3	176.0	67.7	473.6
55°	169.3	167.0	153.6	140.2	128.8	117.4	128.8	140.2	153.6	167.0	169.3	67.6	541.2
60°	158.5	155.9	141.2	126.5	113.7	101.0	113.7	126.5	141.2	155.9	158.5	65.4	606.7
65°	146.9	143.9	127.9	111.9	97.5	83.1	97.5	111.9	127.9	143.9	146.9	61.6	668.3
70°	133.4	130.6	113.2	95.8	80.9	66.0	80.9	95.8	113.2	130.6	133.4	56.2	724.5
75°	119.6	116.9	98.8	80.7	64.7	48.8	64.7	80.7	98.8	116.9	119.6	50.0	774.5
80°	105.2	101.9	83.8	65.8	49.0	32.1	49.0	65.8	83.8	101.9	105.2	42.8	817.3
85°	91.1	88.1	70.0	51.8	34.6	17.5	34.6	51.8	70.0	88.1	91.1	35.6	853.0
90°	79.1	76.5	59.1	41.8	24.8	7.9	24.8	41.8	59.1	76.5	79.1	29.8	882.8
95°	70.8	67.2	52.2	37.2	21.1	4.9	21.1	37.2	52.2	67.2	70.8	26.2	909.0
100°	61.9	57.9	42.8	27.7	15.7	3.6	15.7	27.7	42.8	57.9	61.9	21.6	930.6
105°	58.3	54.5	40.5	26.6	14.5	2.4	14.5	26.6	40.5	54.5	58.3	20.0	950.6
110°	53.8	51.1	39.2	27.4	14.5	1.6	14.5	27.4	39.2	51.1	53.8	18.5	969.1
115°	50.1	47.3	36.0	24.7	13.2	1.6	13.2	24.7	36.0	47.3	50.1	16.4	985.5
120°	46.4	44.3	33.2	22.1	11.8	1.6	11.8	22.1	33.2	44.3	46.4	14.5	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Batten 41	Order number: 51LP327KM20AN EAN: 4058352705070	LP number 59484_7
-----------------------------------	---	------------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.2	21.9	20.7	22.3	22.8	19.9	21.6	20.3	22.0	22.4
	3H	22.3	23.9	22.8	24.3	24.8	21.6	23.2	22.1	23.6	24.1
	4H	23.3	24.7	23.8	25.2	25.7	22.3	23.8	22.8	24.2	24.7
	6H	24.2	25.5	24.7	26.0	26.6	22.9	24.2	23.4	24.7	25.3
	8H	24.7	25.9	25.2	26.4	27.0	23.1	24.4	23.6	24.9	25.5
	12H	25.0	26.1	25.6	26.7	27.3	23.2	24.4	23.8	25.0	25.6
4H	2H	21.0	22.4	21.5	22.9	23.4	20.7	22.1	21.2	22.6	23.1
	3H	23.3	24.5	23.8	25.0	25.6	22.6	23.8	23.1	24.3	24.9
	4H	24.4	25.5	25.0	26.1	26.7	23.4	24.6	24.0	25.1	25.7
	6H	25.4	26.4	26.0	27.0	27.7	24.1	25.1	24.7	25.7	26.3
	8H	26.0	26.9	26.6	27.5	28.2	24.5	25.4	25.1	26.0	26.6
	12H	26.4	27.2	27.1	27.9	28.6	24.6	25.5	25.2	26.1	26.8
8H	4H	24.8	25.7	25.4	26.3	27.0	23.9	24.8	24.5	25.4	26.1
	6H	26.1	26.9	26.7	27.5	28.2	24.9	25.6	25.5	26.3	27.0
	8H	26.7	27.4	27.4	28.1	28.8	25.3	26.0	25.9	26.6	27.3
	12H	27.3	27.9	28.0	28.6	29.4	25.6	26.2	26.2	26.8	27.6
12H	4H	24.8	25.6	25.4	26.2	26.9	24.0	24.8	24.6	25.4	26.1
	6H	26.2	26.8	26.8	27.5	28.2	25.0	25.7	25.7	26.3	27.1
	8H	26.9	27.5	27.5	28.1	28.9	25.5	26.1	26.2	26.7	27.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1175	H(C0) = 18	H(C180) = 18
			B = 25	H(C90) = 0	H(C270) = 0

C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m ²											
45°	10607.0	10862.5	11919.0	14611.5	11919.0	10862.5	10607.0	10862.5	11919.0	14611.5	11919.0	10862.5
50°	10306.7	10407.6	11464.6	14285.4	11464.6	10407.6	10306.7	10407.6	11464.6	14285.4	11464.6	10407.6
55°	10040.2	10487.6	10987.3	13938.1	10987.3	10487.6	10040.2	10487.6	10987.3	13938.1	10987.3	10487.6
60°	9767.4	10206.2	10607.7	13754.6	10607.7	10206.2	9767.4	10206.2	10607.7	13754.6	10607.7	10206.2
65°	9496.2	9920.6	10169.4	13383.0	10169.4	9920.6	9496.2	9920.6	10169.4	13383.0	10169.4	9920.6
70°	9096.8	9584.0	9589.8	13142.2	9589.8	9584.0	9096.8	9584.0	9589.8	13142.2	9589.8	9584.0
75°	8734.2	9239.2	9056.8	12831.8	9056.8	9239.2	8734.2	9239.2	9056.8	12831.8	9056.8	9239.2
80°	8373.1	8804.0	8487.1	12598.9	8487.1	8804.0	8373.1	8804.0	8487.1	12598.9	8487.1	8804.0
85°	7953.0	8471.8	7912.4	13637.2	7912.4	8471.8	7953.0	8471.8	7912.4	13637.2	7912.4	8471.8

Photometric test report

Family
Batten 41

Order number: 51LP327KM20AN
EAN: 4058352705070

LP number
59484_7

Luminance values in cd/m²

γ 65° γ 70° γ 75° γ 80° γ 85°

