

Photometric test report

Family
Modario® 31



Order number: 53BM8127U4GXC2
EAN: 4069025227126

Version

Lamps

Controlgear

Rated values

diffuser optic, frosted, wide distribution

LED 4000 K | CRI ≥ 80


ECG

Net luminous flux = 16360 lm
Power consumption = 90.4 W
Luminous efficacy = 181 lm/W

LP number
59594_119

serial
documentation
30.08.2024

siteco

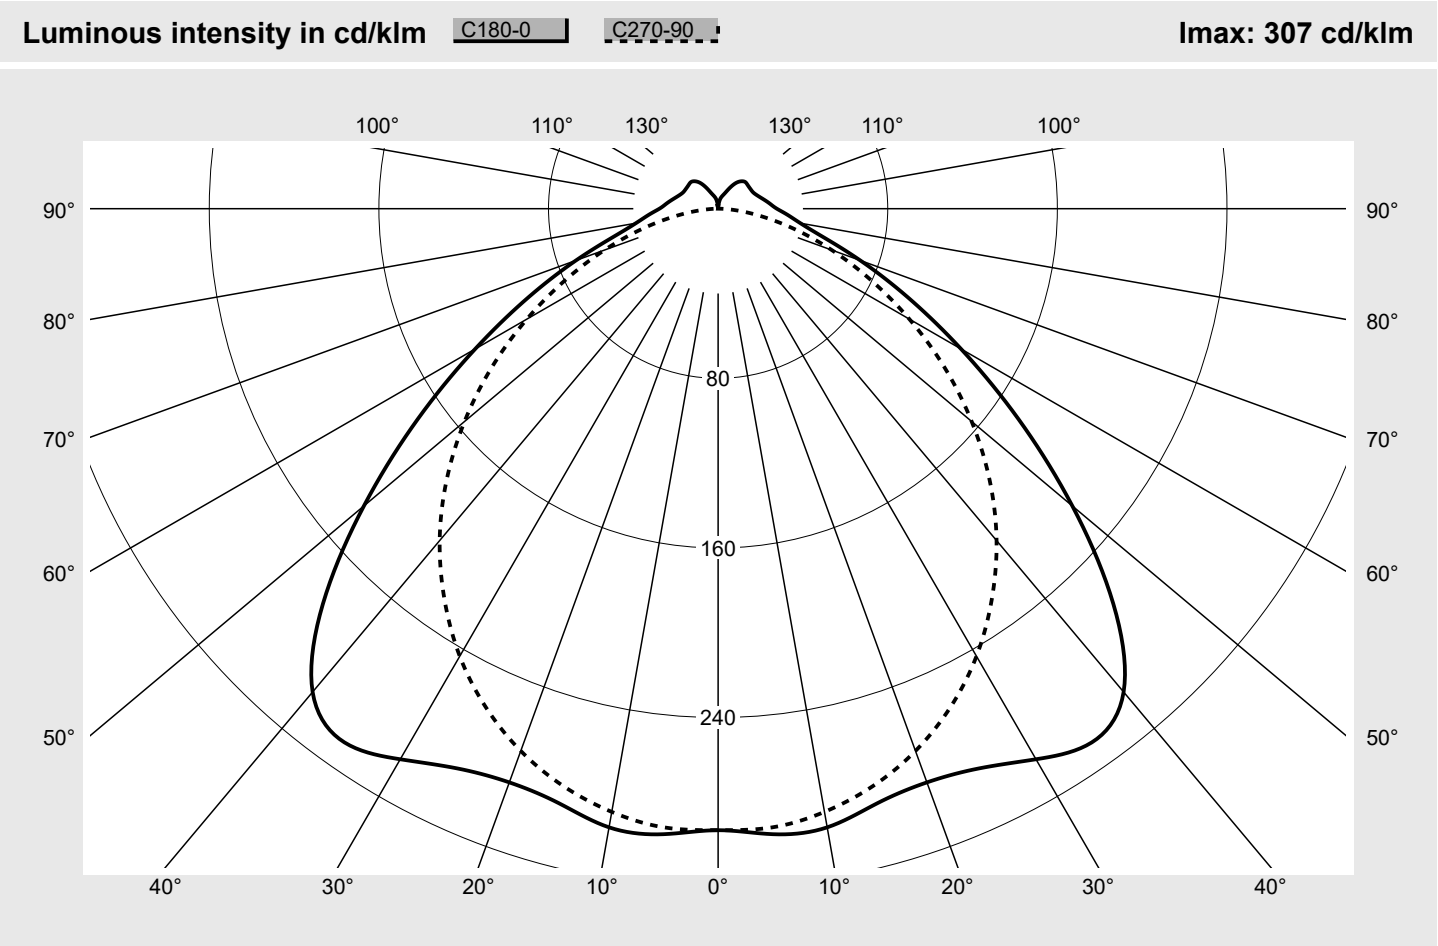

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	ηLB	100.0%
CIE	N1=47 N2=80 N3=95	φ _u	92.6%
	N4=93 N5=100	φ _o	7.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Modario® 31	Order number: 53BM8127U4GXC2 EAN: 4069025227126	LP number 59594_119
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	293.1	293.1	293.1	293.1	293.1	293.1	293.1	1.8	1.8
5°	296.1	295.6	293.1	293.6	293.8	293.0	292.9	14.0	15.8
10°	296.3	296.3	293.6	293.6	292.6	289.9	288.9	27.9	43.7
15°	290.3	290.9	288.4	289.1	288.3	284.2	281.9	40.8	84.5
20°	287.9	288.2	282.8	281.1	280.6	275.9	272.2	52.8	137.3
25°	291.3	290.8	281.6	274.0	270.0	264.7	259.4	64.0	201.2
30°	299.8	298.4	283.7	269.7	258.3	250.5	243.7	74.6	275.8
35°	307.3	306.0	288.6	266.7	246.6	233.7	225.0	84.2	360.1
40°	297.5	299.0	287.4	263.1	235.0	215.2	204.3	91.1	451.1
45°	263.6	268.2	268.7	253.4	221.8	194.2	181.1	92.3	543.4
50°	218.1	223.5	232.0	231.1	204.9	171.7	156.1	87.5	630.9
55°	172.9	177.3	186.9	195.4	181.1	147.5	130.2	77.8	708.7
60°	132.3	135.3	142.3	152.9	149.4	121.4	104.1	64.8	773.5
65°	98.5	100.2	104.0	112.2	114.5	94.5	79.4	50.9	824.4
70°	71.4	72.6	74.4	79.3	82.2	69.0	57.1	37.9	862.3
75°	51.0	51.6	52.9	55.5	55.9	46.4	37.5	27.0	889.4
80°	39.4	39.1	38.7	38.1	35.5	27.5	20.9	18.8	908.2
85°	32.8	32.1	30.1	26.5	21.0	13.7	8.3	13.1	921.3
90°	27.7	27.1	24.5	19.3	12.6	5.6	0.8	9.4	930.7
95°	24.8	24.4	22.4	17.8	11.6	5.3	0.8	8.6	939.3
100°	22.5	22.2	20.5	16.7	11.5	5.5	0.8	7.9	947.2
105°	20.6	20.3	18.7	16.0	11.5	5.9	0.8	7.3	954.6
110°	19.2	18.7	17.6	15.5	11.7	6.3	0.7	6.8	961.4
115°	18.2	17.8	17.0	15.3	12.2	5.8	0.8	6.4	967.8
120°	17.9	17.4	16.9	15.5	12.3	5.3	0.8	6.1	973.9
125°	17.8	17.4	16.9	15.5	11.8	5.2	0.8	5.7	979.6
130°	17.9	17.4	16.8	15.0	10.1	5.0	0.9	5.2	984.7
135°	17.9	17.3	16.2	13.6	8.1	4.3	1.0	4.5	989.2
140°	16.9	16.0	14.5	11.2	6.7	3.5	1.1	3.6	992.8
145°	14.9	14.0	12.0	8.5	5.5	2.8	1.2	2.7	995.4
150°	11.8	10.8	9.0	6.5	4.7	2.2	1.4	1.8	997.3
155°	8.6	8.1	7.0	5.2	4.0	1.7	1.5	1.2	998.5
160°	6.8	6.5	5.3	4.3	3.2	1.5	1.5	0.8	999.2
165°	5.5	5.3	3.9	3.4	2.1	1.6	1.6	0.5	999.7
170°	3.8	3.1	2.5	2.0	1.6	1.6	1.6	0.2	999.9
175°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.1	1000.0
180°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	1000.0

Photometric test report

Family Modario® 31			Order number: 53BM8127U4GXC2 EAN: 4069025227126							LP number 59594_119	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.9	24.6	23.3	24.9	25.3	22.7	24.4	23.1	24.7	25.0
	3H	23.8	25.3	24.2	25.6	26.0	23.8	25.4	24.2	25.7	26.1
	4H	24.1	25.5	24.5	25.9	26.2	24.2	25.7	24.6	26.0	26.4
	6H	24.4	25.7	24.8	26.1	26.5	24.5	25.8	24.9	26.2	26.6
	8H	24.6	25.8	25.0	26.2	26.6	24.6	25.8	25.0	26.2	26.6
	12H	24.7	25.9	25.2	26.3	26.7	24.6	25.8	25.0	26.2	26.6
4H	2H	23.6	25.0	24.0	25.4	25.7	23.5	24.9	23.9	25.2	25.6
	3H	24.6	25.8	25.0	26.2	26.6	24.8	26.0	25.2	26.4	26.8
	4H	25.0	26.1	25.4	26.5	26.9	25.3	26.4	25.7	26.8	27.2
	6H	25.4	26.3	25.8	26.8	27.2	25.6	26.6	26.1	27.0	27.5
	8H	25.6	26.5	26.0	26.9	27.4	25.8	26.7	26.2	27.1	27.6
	12H	25.8	26.6	26.3	27.1	27.5	25.8	26.6	26.3	27.1	27.6
8H	4H	25.2	26.1	25.7	26.6	27.0	25.5	26.4	26.0	26.9	27.3
	6H	25.8	26.5	26.2	27.0	27.5	26.0	26.8	26.5	27.2	27.7
	8H	26.0	26.7	26.5	27.2	27.7	26.2	26.9	26.7	27.3	27.8
	12H	26.4	26.9	26.9	27.4	28.0	26.3	26.9	26.8	27.4	27.9
12H	4H	25.3	26.1	25.8	26.5	27.0	25.6	26.4	26.1	26.8	27.3
	6H	25.8	26.5	26.3	27.0	27.5	26.1	26.7	26.6	27.2	27.7
	8H	26.2	26.7	26.7	27.2	27.8	26.3	26.9	26.8	27.4	27.9

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 2392 B = 75	H(C0) = 25 H(C90) = 0	H(C180) = 25 H(C270) = 0
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
			Luminance in cd/m²					
45°		25499.0	26168.2	26891.4	26445.3	24522.2	23058.0	23358.6
50°		22143.6	22912.6	24489.2	25592.4	24246.4	22091.8	22146.6
55°		18621.0	19305.1	21038.9	23246.9	23251.1	20882.8	20707.3
60°		15298.0	15836.9	17297.5	19801.8	21141.8	19257.6	18994.9
65°		12397.6	12794.5	13864.6	16086.0	18209.0	17198.5	17125.2
70°		9930.2	10267.1	11055.7	12835.9	15037.2	14874.4	15214.7
75°		8003.5	8258.7	8967.4	10402.4	12141.2	12355.7	13205.8
80°		7158.7	7269.7	7696.9	8570.7	9593.8	9705.7	10973.2
85°		7133.9	7185.1	7331.1	7504.2	7576.7	7206.9	8725.3

Photometric test report

Family
Modario® 31

Order number: 53BM8127U4GXC2
EAN: 4069025227126

LP number
59594_119

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

